


ST-VA VOLT / CURRENT Conditioner WITH RS485, A/O & RELAY

FEATURE

- Measuring Voltage or Current for DC / AC / TRMS
- Accuracy: $\pm 0.04\%$ or $\pm 0.1\%$; Display range: -19999~29999
- User function, easily programmable via the top panel
- 1 Analogue output, 1 RS 485 port and 3 Relay output available for multi-cross selection in 3 outputs
- CE Approved



ORDERING INFORMATION

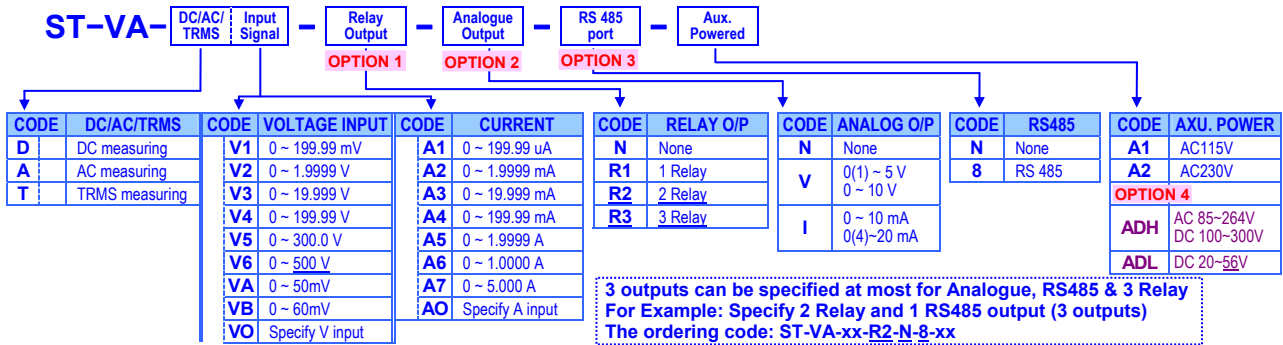

TECHNICAL SPECIFICATION

Input		Input			
Measuring Range DC / AC / TRMS	Input Impedance	Measuring Range DC / AC / TRMS	Input Impedance		
Voltage	0~50/~100	$\geq 5M$ ohm	Current		
	0~199.99 mV	$\geq 5M$ ohm		0~199.99 μ A	1K ohm
	0~1.9999 V	$\geq 1M$ ohm		0~1.9999 mA	100 ohm
	0~19.999 V	$\geq 1M$ ohm		0~19.999 mA	10 ohm
	0~199.99 V	$\geq 1M$ ohm		0~199.99 mA	1 ohm
	0~300.0 V	$\geq 2M$ ohm		0~1.9999 A	0.05 ohm
0~500.0 V	$\geq 2M$ ohm	0~5.000 A	0.02 ohm		

Calibration: Digital calibration by front key
A/D converter: 16 bits resolution
Accuracy: DC: $\leq \pm 0.04\%$ of FS $\pm 1C$
 AC: $\leq \pm 0.1\%$ of FS $\pm 1C$
Sampling rate: 15 cycles/sec
Response time: ≤ 100 msec. (when the AvG = "1") in standard
Input range: Input High and Low programmable
R.H.L: Settable range: 0.00~100.00% of input range
R.L.L: Settable range: 0.00~100.00% of input range

Display & Functions

LED: Numeric: 5 digits, 0.28"H red high-brightness LED
 Relay output indication: 1 square red LED
 RS 485 communication: 1 square orange LED
 Max/Mini Hold indication: 2 square orange LED
Display range: -19999~29999;
Scaling function: L.S.C: Low Scale; Settable range: -19999~+29999
 H.S.C: High Scale; Settable range: -19999~+29999
 Programmable from 0 / 0.0 / 0.00 / 0.000 / 0.0000
Decimal point: o.u.F.L, when input is over 20% of input range Hi
Over range indication: -o.u.F.L, when input is under -20% of input range Lo
Under range indication: -o.u.F.L, when input is under -20% of input range Lo
Max / Mini recording: Maximum and Minimum value storage during power on.
Display functions: PV / Max(Mini) Hold / RS 485 Programmable
 Settable range: -19999~29999 counts
Low cut: P.u.P.r.o: Settable range: -19999~+29999
Digital fine adjust: P.u.S.P.n: Settable range: -19999~+29999

Reading Stable Function

Average: Settable range: 1~99 times
Moving average: Settable range: 1(No)~10 times
Digital filter: Settable range: 0(No)~1~99 times

Amend: 2010/4/28: Change power supply code from D25 to ADL:
 AC/DC20~56V, ADH:AC 85~264V / DC 100~300V

Control Functions(option)

Set-points: Three set-points
Control relay: Three relays(Maximum); FORM-A, 1A/230Vac, 3A/115V
Relay energized mode: Energized levels compare with set-points:
 Hi / Lo / Hi.HLd / Lo.HLd programmable
DO function: Energized by RS485 command of master.
Energizing functions: Start delay / Energized & De-energized delay / Hysteresis / Energized Latch
Start band: (Minimum level for Energizing): 0~9999counts
Start delay time: 0:00.0~9(Minutes):59.9(Second)
Energized delay time: 0:00.0~9(Minutes):59.9(Second)
De-energized delay time: 0:00.0~9(Minutes):59.9(Second)
Hysteresis: 0~5000 counts

Analogue output(option)

Accuracy: $\leq \pm 0.1\%$ of F.S.; 16 bits DA converter
Ripple: $\leq \pm 0.1\%$ of F.S.
Response time: ≤ 100 msec. (10~90% of input)
Isolation: AC 2.0 KV between input and output
Output range: Specify either Voltage or Current output in ordering
 Voltage: 0~5V / 0~10V / 1~5V programmable
 Current: 0~10mA / 0~20mA / 4~20mA programmable
Output capability: Voltage: 0~10V: $\geq 1000\Omega$;
 Current: 4(0)~20mA: $\leq 6000\Omega$ max
Functions: R.o.H5 (output range high): Settable range: -19999~29999
 R.o.L5 (output range Low): Settable range: -19999~29999
 R.o.H.L (output High Limit): 0.00~110.00% of output High
 R.o.P.r.o: Settable range: -38011~+27524
 R.o.S.P.n: Settable range: -38011~+27524

RS 485 Communication(option)

Protocol: Modbus RTU mode
Baud rate: 1200/2400/4800/9600/19200/38400 programmable
Data bits: 8 bits
Parity: Even, odd or none (with 1 or 2 stop bit) programmable
Address: 1 ~ 255 programmable
Remote display: to show the value from RS485 command of master
Distance: 1200M
Terminate resistor: 150 Ω at last unit.

Electrical Safety

Dielectric strength: AC 2.0 KV for 1 min, Between Power / Input / Output / Case
Insulation resistance: $\geq 100M$ ohm at 500Vdc, Between Power / Input / Output
Isolation: Between Power / Input / Relay / Analogue / RS485
EMC: EN 55011:2002; EN 61326:2003
Safety(LVD): EN 61010-1:2001
Vibration: 1~800 Hz, 3.175 g²/Hz

Environmental

Operating temp.:	0~60 °C
Operating humidity:	20~95 %RH, Non-condensing
Temp. coefficient:	≤100 PPM/°C
Storage temp.:	-10~70 °C


Mechanical

Dimensions:	50mm(W) x 134mm(H) x 80mm(D) with socket
Case material:	ABS fire-resistance (UL 94V-0)
Mounting:	DIN rail mounting (35mm standard)
Terminal block:	11 pin Socket, 10A/500Vac, M2.6, 16-22AWG
Weight:	Under 480g(without socket)

Power

Power supply:	AC 115 or 230V ± 15%, 50/60Hz; Optional: AC 85~264V / DC 100~300V, DC 20~56V
Power consumption:	5.0VA maximum
Back up memory:	By EEPROM

CONNECTION DIAGRAM(11 PIN)




DO NOT UNPLUG IF LIVE

	OUTPUT 1	OUTPUT 2	OUTPUT 3
	TERMINAL 1+ & 2-	TERMINAL 10+ & 11-	TERMINAL 3+ & 9-
3 O/P	RS485	ANALOGUE	RELAY
3 O/P	ANALOGUE	RELAY	RELAY
3 O/P	RS485	RELAY	RELAY
3 O/P	RELAY	RELAY	RELAY
2 O/P	RS485	ANALOGUE	
2 O/P	RS485	RELAY	
2 O/P	ANALOGUE	RELAY	
1 O/P	ANALOGUE		
1 O/P	RS485		
1 O/P	RELAY		


Please check the voltage of power supplied first, and then connect to the specified terminals. It is recommended that power supplied to the meter be protected by a fuse or circuit breaker.

Power Supply

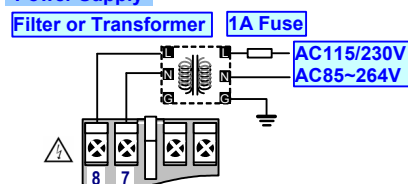


Due to the limited terminals for three outputs(Analogue, RS485, Relay), the outputs will be assigned as label on the product and above table. Please check it out before wiring.

Input connection




RS485 Communication Port

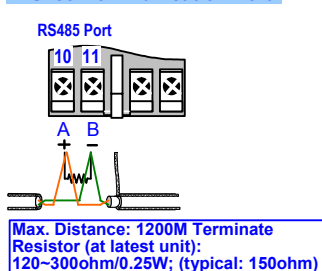


For more detail function description, please refer to the data sheet of CS2-VA or ST-VA operating manual

FRONT PANEL

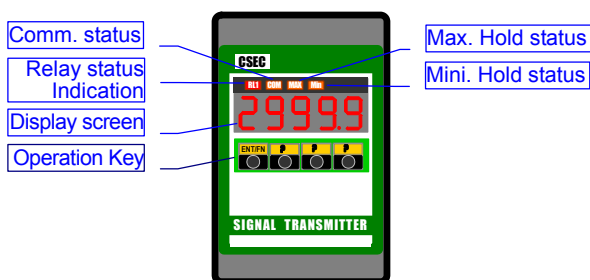

DIMENSIONS

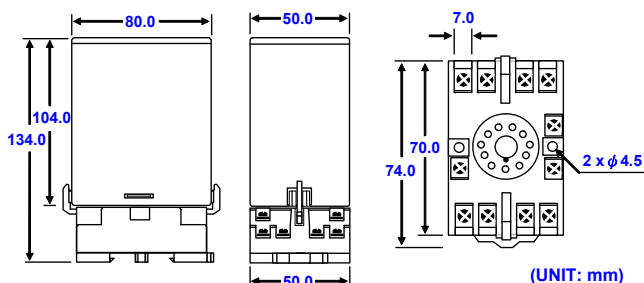

INSTALLATION

The meter should be installed in a location that dose not exceed the maximum operating temperature and provides good air circulation.

