

**YUE QING HEYI ELECTRICAL CO.,LTD**

ADD:ShangYanHou Village,LiuShi Town,YueQing City,ZheJiang,CHINA

TEL:86-577-62659558

FAX:86-577-62659558

contact :Mrs Bethy

E-mail:heyi@heyielectrical.com

Web:www.transformerfactory.com



**LMK Series**



LMK3 range of current transformers can be applied to test, control, display and record the running of the electrical equipment, and to protect the equipment against the damage, in the AC circuit with the rated voltage value below 720V and the frequency of 50–60Hz. The product can be also applied to form a complete set of mine transformer


**Features**

- Safe, easy to install, portable
- Wide inner window, allowing clamping of big cables or bus-bars
- Wide range of sizes to accommodate all the existing installations

**Applications**

- Current measurement, monitoring and protection for electrical wiring and equipment.
- Current and power measurement for electric motors, lighting, air compressor, heating and ventilation system, air-condition equipment and automation-control system.
- Current, power and energy monitoring device.
- Relay protection device.

**Circuit connection diagram**

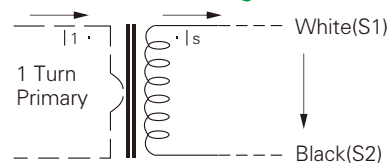

**Technique Index**

Electrical Parameter	
Frequency	50/60Hz
Rated Input	1A–5000A
Measuring range	5% In–120% In
Rated Output	1A, 5A
Rated Voltage	0.72KV(AC)
Dielectric strength	3.0KV/1mA/1min
Insulation Resistance	DC500V/100MΩmin

Mechanical Parameter	
Case	PC /UL94–V0
Bobbin	PBT
Core	Silicon steel
Construction	Screw
Operating Temp	– 25°C ~ + 75°C
Operating Humidity	≤85%
Output Connection	Terminal


**LMK Series**



LMK-20

Technical parameter

TYPE	Ratio(A)	Burden(VA)		Rated Frequency(Hz)
		Class:0.5	Class:1.0	
LMK-20	75/5A	-	2.5	50/60
	100/5A	-	5	50/60
	150/5A	5	10	50/60
	200/5A	5	10	50/60

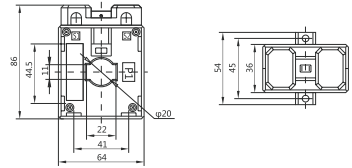


Technical parameter



LMK-30

TYPE	Ratio(A)	Burden(VA)		Rated Frequency(Hz)
		Class:0.5	Class:1.0	
LMK-30	150/5A	5	10	50/60
	200/5A	5	10	50/60
	250/5A	5	10	50/60
	300/5A	10	10	50/60
	400/5A	10	10	50/60
	500/5A	10	10	50/60




Technical parameter



LMK-40

TYPE	Ratio(A)	Burden(VA)		Rated Frequency(Hz)
		Class:0.5	Class:1.0	
LMK-40	150/5A	5	10	50/60
	200/5A	5	10	50/60
	250/5A	5	10	50/60
	300/5A	10	10	50/60
	400/5A	10	10	50/60
	500/5A	10	10	50/60
	600/5A	10	10	50/60
	750/5A	10	10	50/60
	800/5A	10	10	50/60
	1000/5A	10	10	50/60

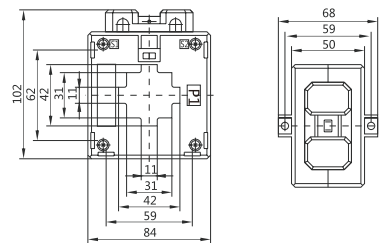


Technical parameter



LMK-50

TYPE	Ratio(A)	Burden(VA)		Rated Frequency(Hz)
		Class:0.5	Class:1.0	
LMK-50	300/5A	10	10	50/60
	400/5A	10	10	50/60
	500/5A	10	10	50/60
	600/5A	10	10	50/60
	750/5A	10	10	50/60
	800/5A	10	10	50/60
	1000/5A	10	10	50/60
	1200/5A	20	20	50/60




**LMK Series**

Technical parameter



LMK-60

TYPE	Ratio(A)	Burden(VA)		Rated Frequency(Hz)
		Class:0.5	Class:1.0	
LMK-60	500/5A	10	10	50/60
	600/5A	10	10	50/60
	750/5A	10	10	50/60
	800/5A	10	10	50/60
	1000/5A	10	10	50/60
	1200/5A	20	20	50/60
	1500/5A	20	20	50/60




Technical parameter



LMK-80

TYPE	Ratio(A)	Burden(VA)		Rated Frequency(Hz)
		Class:0.5	Class:1.0	
LMK-80	500/5A	10	10	50/60
	600/5A	10	10	50/60
	750/5A	10	10	50/60
	800/5A	10	10	50/60
	1000/5A	10	10	50/60
	1200/5A	20	20	50/60
	1500/5A	20	20	50/60
	2500/5A	40	40	50/60




Technical parameter



LMK-100

TYPE	Ratio(A)	Burden(VA)		Rated Frequency(Hz)
		Class:0.5	Class:1.0	
LMK-100	800/5A	10	10	50/60
	1000/5A	10	10	50/60
	1200/5A	20	20	50/60
	1500/5A	20	20	50/60
	2000/5A	40	40	50/60
	2500/5A	40	40	50/60




Technical parameter



LMK-120


TYPE	Ratio(A)	Burden(VA)		Rated Frequency(Hz)
		Class:0.5	Class:1.0	
LMK-120	1000/5A	10	10	50/60
	1200/5A	20	20	50/60
	1500/5A	20	20	50/60
	2000/5A	40	40	50/60
	2500/5A	40	40	50/60
	4000/5A	40	40	50/60

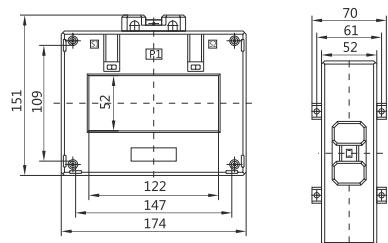


**LMK Series**

Accuracy class characteristics:

a) classes 0.2; 0.5; 1

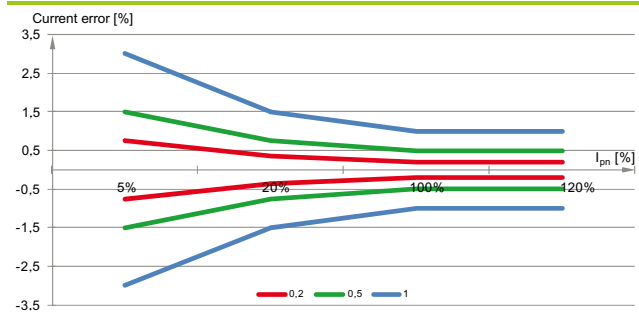

b) comparison of classes 0.5 and 0.5S

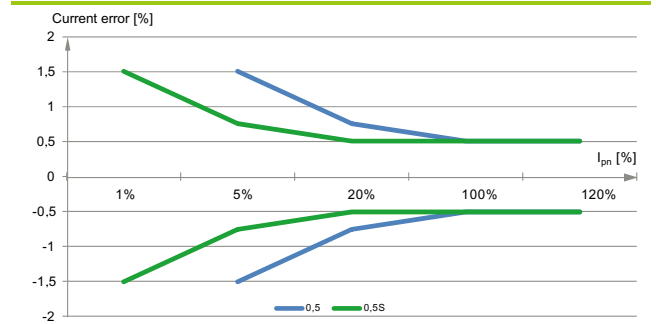

Installation

