



# ANLY TIMER

## ET2-41 TWIN TIMER



### CHARACTERISTIC :

- Wide operating voltage range, AC/DC 24V~240V
- 10 time range, from 1 second to 300 hour
- X1, Y1, Y2 contact for mode control
- 22.5 mm thin body design


### SPECIFICATION :

Operating voltage	AC/DC(V): 24~240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	Approx. 3VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 93g

### TYPE SELECTION :

Type	ET2-41
Operation mode	B6
Output contact	2C / 1A1C
Time range	10 Ranges: 1s / 3s / 10s / 30s / 100s / 300s / 30m / 300m / 30h / 300h


## CONNECTION :

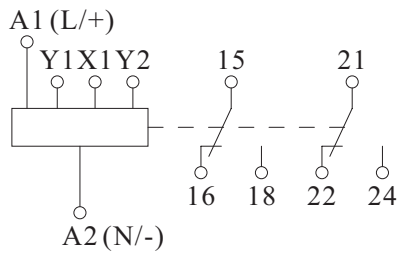

Contact	Short	Open
Y1 - A1	Repeat cycle OFF start	Repeat cycle ON start
Y2 - A1	2C	1A1C
X1 - A1	Gate	---


## TIMING CHART :

Mode B6 : Circulation

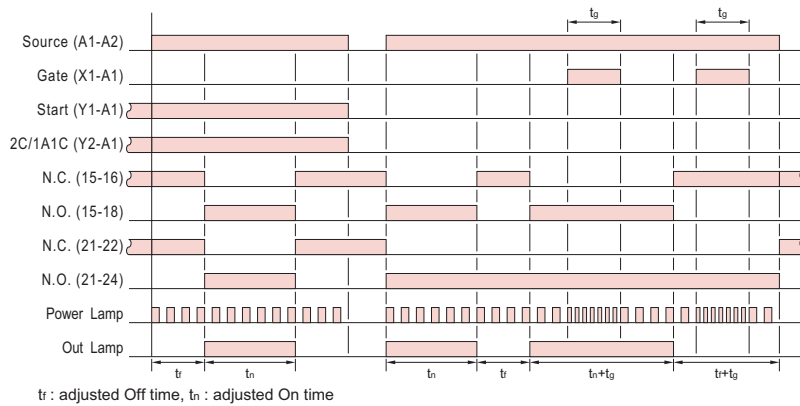

## DIMENSIONS : (mm)

N type(Surface Mounting):

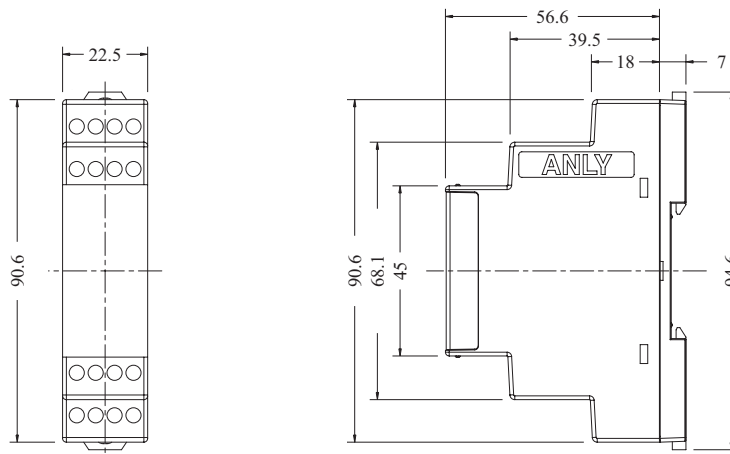

## ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

### TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Shinjuang City, Taipei, Taiwan 242  
 TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

### MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Triseqi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia  
 TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

### HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong  
 TEL: +852-2397-2505 FAX: +852-2397-6080

### SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041  
 TEL: +86-21-6218-3300 FAX: +86-21-6217-5911