



# D-SINUS Motor Controller




The innovative motor regulation in the Deutronic® D-SINUS Series is based on state of the art, sinus-commutated speed controller technology. Compared with the competition the extremely complex control algorithm of the D-SINUS controller enables operation without the need for additional, elaborate sensors. Therefore a higher degree of synchronisation can be achieved by field-oriented-controlled phase currents. Due to the sinusoidal current characteristic the efficiency is increased and the torque generated is constant in contrast to block commutation.

## Benefits

- Sensorless motor control
- Maximum efficiency
- High degree of synchronization
- Compact design



# D-SINUS Motor Controller

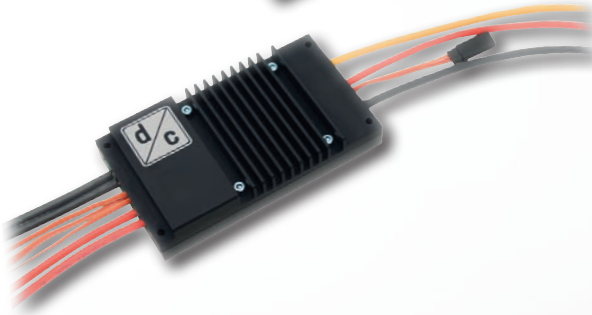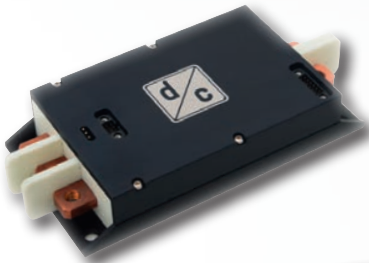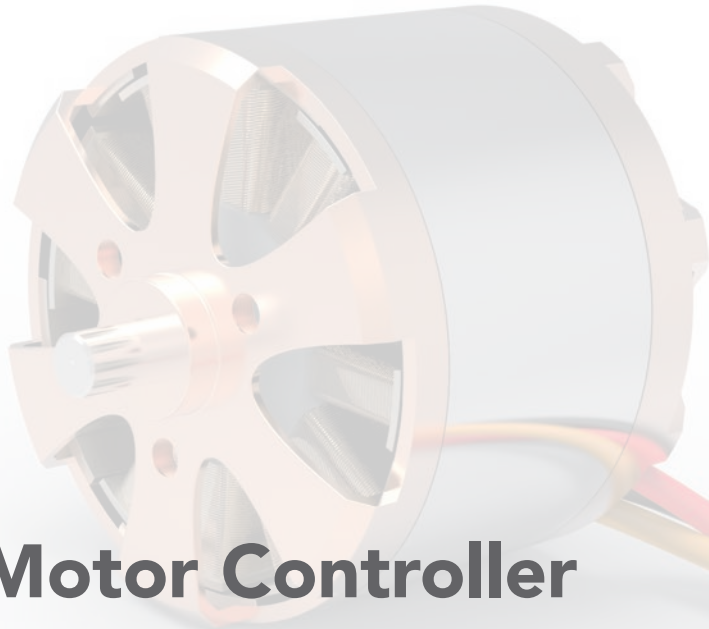

## Technical Data

Input voltage	16-52VDC (D-Sinus 120/180) 22-58VDC (D-Sinus 350); 22-98VDC and 22-134VDC on request
Phase current	D-SINUS 120 120A D-SINUS 180 180A D-SINUS 350 350A
Operating modes	Speed control Torque control

## Options

- Different interfaces:  
CAN (D-SINUS 180 and 350), Uart, ext. temperature sensors, position sensing  
(Hall-sensors/Quadrature encoder)
- Telemetry
- Recuperation (current limited) for controlled battery charging



Deutronicstraße 5 | D-84166 Adlkofen/Germany  
Tel.: +49 (0)8707 920-0 | Fax +49 (0)8707 1004  
E-Mail: [sales@deutronic.com](mailto:sales@deutronic.com) | [www.deutronic.com](http://www.deutronic.com)