


Accessories for HSG, KSH, HSGK and DSH

INKOMA-GROUP

The comprehensive range of accessories for high capacity screw jacks types HSG, KSH, HSGK and DSH allows the designer the flexibility to tailor the use of the screw jack precisely to the application.

All accessories are manufactured to the same exacting standards as the rest of the INKOMA product range. In addition to this comprehensive selection, customers special requirements can be accommodated.

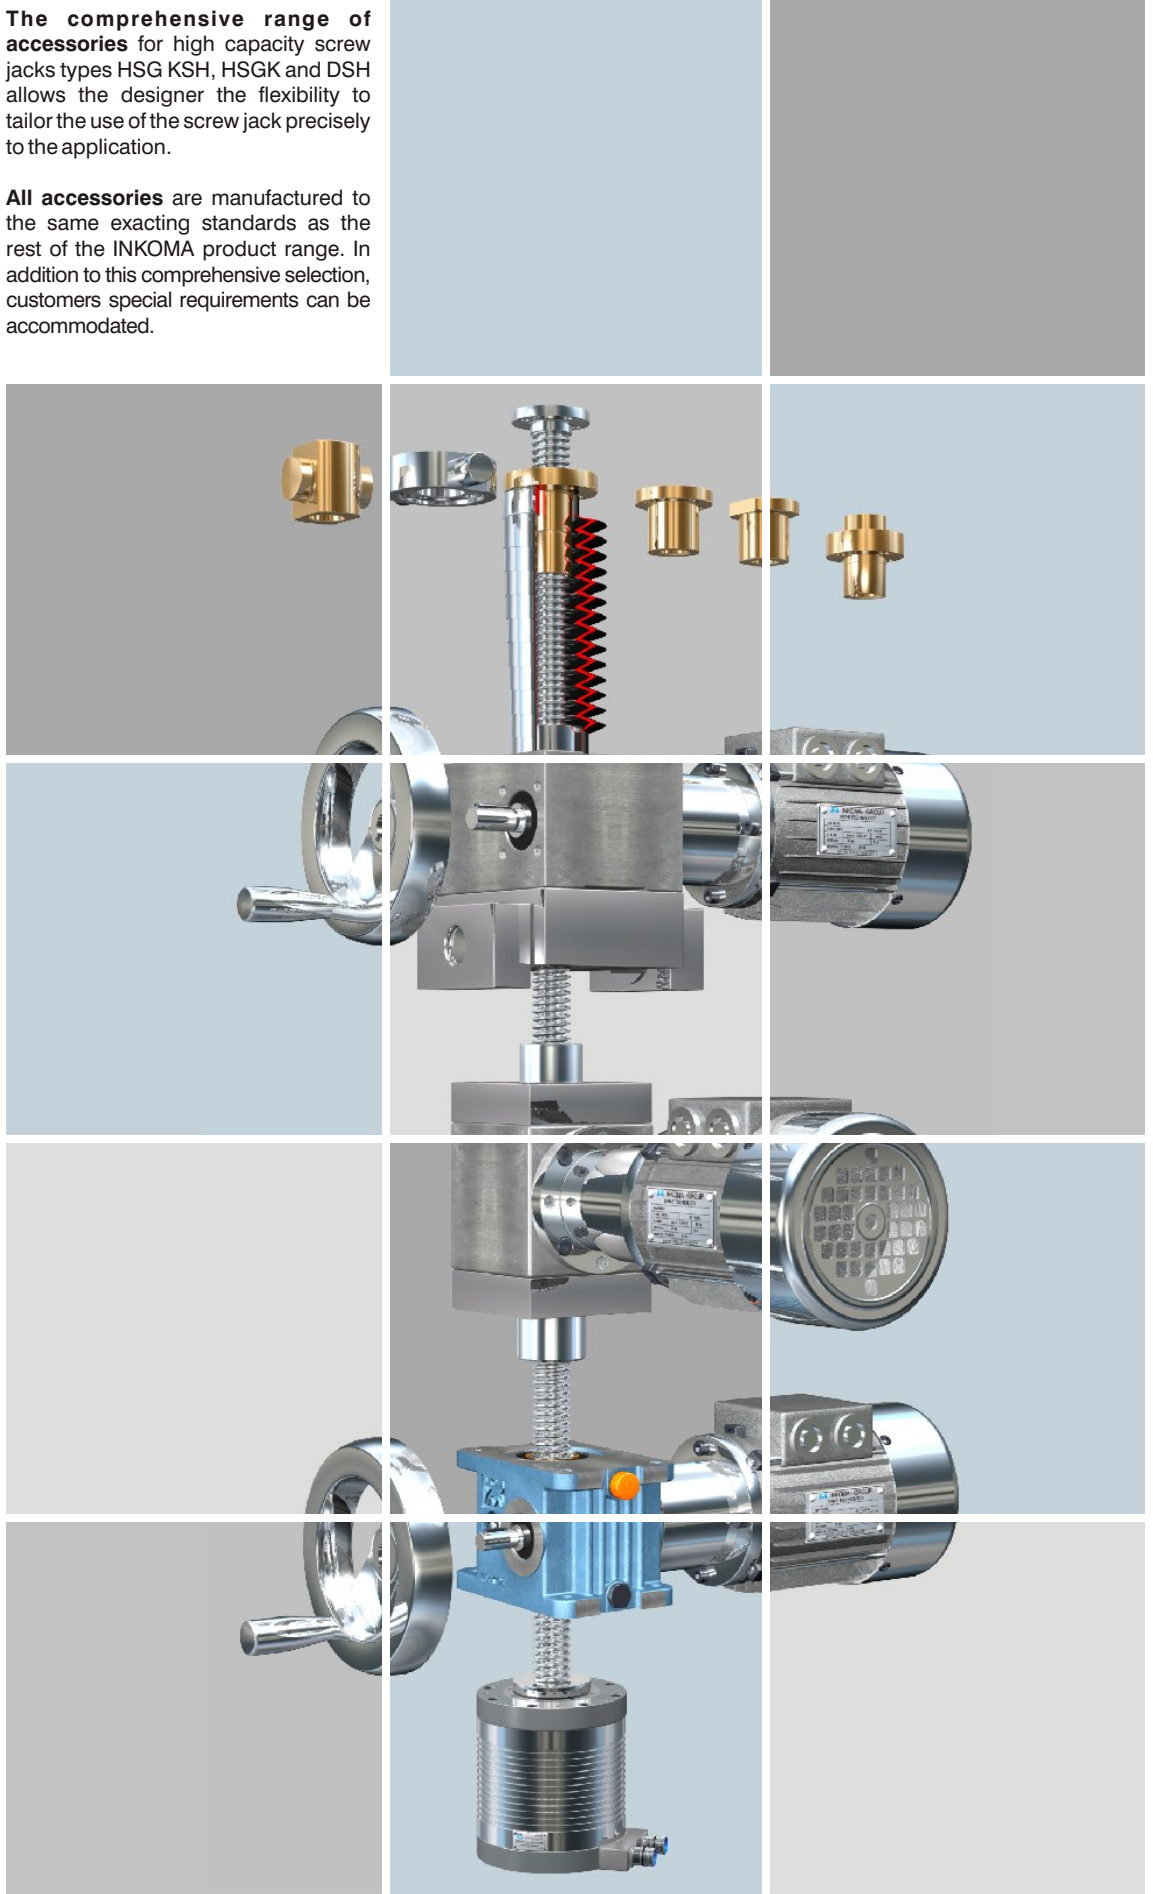

Accessories for HSG, KSH, HSGK and DSH

Accessories for rotating version (R)



Flanged nut - FMS/ FM
for standard applications



Safety nut - SFM
allows wear monitoring



Duplex nut - DFM
connection of two bellows adaption for lubrication



Trapezoidal spindle nut - TM
Hexagon trapezoidal nut - ST
for applications where space is critical



Flange nut with flats - FMF
for standard connections between screw jacks and moving components



Self-aligning travelling nut - FMZ
for articulating connection



Bearing plate - GL
to support the free end of the spindle



Self aligning nut flange - SL
allows articulating fitting of flanged nut



Automatic lubrication device
allows continuous grease supply

Accessories for translating version (S, SA, SV, SVA)



Mounting flange - BF
for simple attachment of the spindle end



Rod end bearing - GSK
for simple attachment of the spindle end



Clevis - GK
for simple attachment of the spindle end



Clevis attachment - SE
for flexible connection to the moving component



Safety nut - SFM-S
allows wear measurement



Setting ring - SR
allows fitting of limit switch



Limit switch with roller follower
for monitoring of the spindle position



Inductive proximity switch
for monitoring of the spindle position



Stroke measurement options
available methods

Accessories for all versions



Trunnion adaptor - KA
allows articulating fitting of flanged nut



Trunnion adaptor - KAS
allows articulating fitting of flanged nut



Mounting feet - BP
provides an alternative method



Shaft cover - WA
covers the exposed spindle end



Handwheel - HR
for manual actuation



Bearing block - LB
base mounting for trunnion options



Bearing flange - LF
base mounting for trunnion options



Folding bellows - FB
Heavy duty folding bellows - SB
provide spindle protection



Bellows mounting sleeve - H
provides fixing shoulder for bellows



Spiral protective sleeve - SF
provide spindle protection



Cardan shafts - GX
provide torsionally stiff resilient connections



Cardan shafts - GE
provide low cost flexible connections



Support bearings - SNH
to support extended cardan shafts



Elaflex coupling - EFK
flexible shaft coupling



Gear coupling - M
standard version



Gear coupling - light
light duty version



Motor adaptor - MG
for positive and efficient mounting of motors



3 phase motor - B3 - B14
foot mounting or flange mounting



INKOMA - GROUP Headoffice
Sitz der INKOMA Maschinenbau GmbH
Neue Reihe 44
D - 38162 Schandelah - Germany

phone: +49/(0)5306-9221- 0
fax: +49/(0)5306-9221-50
e-mail: info@inkoma.de
internet: www.INKOMA-GROUP.com

Request our [complete catalogue](#) or visit us on the [Internet](#). You can obtain a free download of our brochure or the product drawing of the selected item using the [CADENAS](#) facility.