



Modular time relays TM series



moduLo

Lovato
electric

100% electricity

Modular time relays



moduLo

LOVATO Electric extends the range of electronic time relays with new modular models of the TM series, **moduLo** line.

- Models with multiscale 0.1 seconds ... 100 days
- Wide supply voltage range 12 ... 440V
- Excellent time accuracy and stability
- Immunity to industrial ambient noise
- Operating temperature -20 ... +60°C
- Robust modular DIN 43880 housing, one module
- 35mm DIN rail mounting or screw fixing by extractible clips
- Conductor section 0.2 ... 4mm²
- Reliable in most severe operating conditions.

Time relays



ORDER CODE	TM P	TM M1	TM M2	TM PL	TM D	TM ST	TM ST A440
DESCRIPTION	On delay	Programmable multifunction	Programmable multifunction	Asymmetrical recycle	True off delay	For star- delta starting	
CONTROL CIRCUIT							
Rated supply voltage (Us)	24-48VDC 24-240VAC	12-240VAC/DC			24-240VAC/DC	24/48VDC 24-240VAC	380-440VAC
TIMING CIRCUIT							
Timing setting range		Multiscale 0.1-1s 1-10s 6-60s 1-10min 6-60min 1-10h 0.1-1 day 1-10 days ON only OFF only		Multiscale 0.1-1s 1-10s 6-60s 1-10min 6-60min 1-10h 0.1-1 day 1-10 days 3-30 days 10-100 days	Multiscale 0.06-0,6s 0.6-6s 6-60s 8-180s		Multiscale 0.1-1s 1-10s 6-60s 1-10min
OUTPUT CONTACTS							
Contact arrangement	1 delayed changeover	1 instantaneous/ delayed N/O + 1 delayed c/o		1 delayed changeover		2 delayed N/O	
Maximum switching voltage	250VAC						
Conventional free air thermal current (Ith)	8A			5A		8A	
OTHER INFORMATION							
Operating ambient temperature	-20...+60°C						
Quantity per package [n°]	1						
Net weight [kg]	0.048	0.053	0.078	0.060		0.065	

Staircase time relay

DESCRIPTION	Staircase illumination		
CONTROL CIRCUIT	Rated supply voltage (Us)	220-240VAC	
	Rated supply voltage (Us)	220-240VAC	
TIMING CIRCUIT	Time setting range	Single scale 0.5-20min	
OUTPUT CONTACTS	Contact arrangement	1 delayed N/O	
	Maximum switching voltage	250VAC	
	Conventional free air thermal current (Ith)	16A	
OTHER INFORMATION	Operating temperature	-20...+60°C	
	Quantity per package [n°]	1	
	Net weight [kg]	0.060	

- Connection with up to 50 light-up switches maximum
- Suitable for 3 or 4-wire systems
- 1 slide switch for manual or automatic operation (constant lighting)
- Extra lighting time function: when the button is pressed for more than 3s, the time relay remains energised for 1 hour. By pressing it again for additional 3s, the time relay de-energises.



ORDER CODE

TM LS

Operational and wiring diagrams




A1-A2 = Power supply


ON ⊗ = LED indicator for power on

⊗ ⊘ = LED indicator for relay state


TM P




On delay. Delay on make, with start at relay energising




TM M1



On delay. Delay on make, with start at relay energising




TM M2

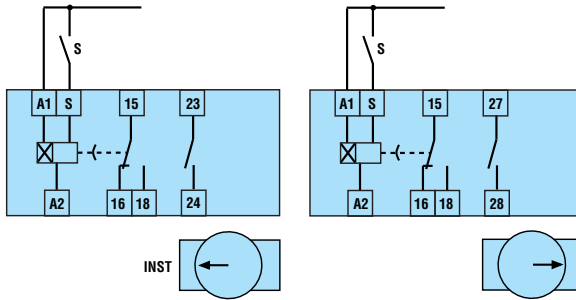


With the rotary switch on INST, the configurable contact (23 - 24) instantaneously switches at relay energising. With the rotary switch on DEL, the configurable contact (27 - 28) replicates the same operation of the first contact (15 - 18).


Off delay. Relay energising at external contact closing with start on break




Internal trigger ON/OFF. Relay contact either opens or closes at each external contact closing




Pulse on relay energising with start on energising




Pulse on relay energising with start at external contact closing




Pulse generator. Unequal timing recycle, starting with ON pulse time and 0.5sec OFF time




Flasher, starting with OFF (pause) interval. Equal timing recycle, OFF first




Pulse on relay energising with start at external contact opening




TM PL




ON first (W)




Flasher, starting with ON (work) interval. Equal timing recycle, ON first



On-Off delay. Delay on make, with start at external contact closing, and delay at break, with start at external contact opening



OFF first (P)



Operational and wiring diagrams





A1-A2 = Power supply

ON ⊗ = LED indicator for power on


⊗ ′ = LED indicator for relay state

TM D


True off delay. Delay on break, starting at relay de-energising



TM ST






For star-delta starting




TM LS

Staircase lighting

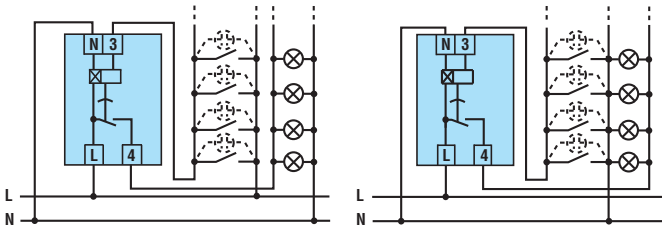

Dimensions [mm]

moduLo

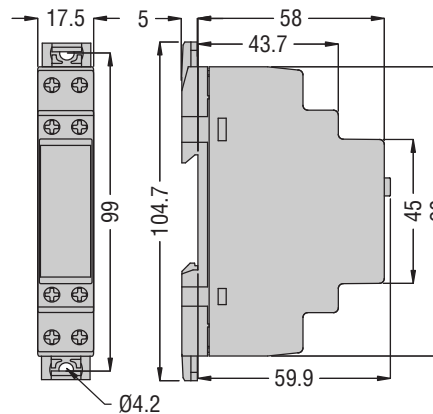


Certifications and compliance

Certifications obtained: cULus, GOST.

Compliant with standards: IEC/EN 61812-1.

LOVATO Electric can also offer a complete range of time relays in the following versions.

DIN mount time relays

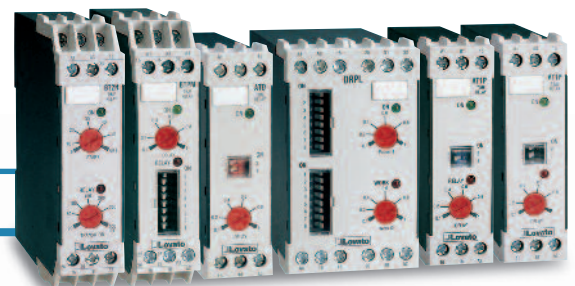

- 31 AT1P... On delay. Multiscale. Multivoltage in AC. 1 changeover contact.
- 31 AT1CP... On delay. Multiscale. Multivoltage in AC and DC. 1 changeover contact.
- 31 ATD... Off delay. Multiscale. Single voltage in AC and DC. 1 changeover contact.
- 31 AT1DP... Off delay at external contact opening. Multiscale. Single voltage in AC and DC. 1 changeover contact.
- 31 BTM 220 Multifunction. Multiscale. Multivoltage in AC and DC. 2 independent changeover contacts.
- 31 DRPL 220 Asymmetrical recycle. Multiscale. Multivoltage in AC and DC. 2 independent changeover contacts.
- 31 BT2N... For starting. Dual voltage in AC and DC.

Plug-in and flush-mount time relays, 48x48mm

- 31 L48T... On delay. Single scale. Single voltage. 1 changeover contact.
- 31 L48TP... On delay. Multiscale. Multivoltage. 1 changeover contact.
- 31 L48TPB... On delay. Multiscale. Single voltage. 2 independent changeover contacts.
- 31 L48M... Multifunction. Multiscale. Multivoltage. 2 changeover contacts.



The above-indicated order codes must be completed with the end-scale time value, if any, and the supply voltage. Contact our Customer Service (Tel. +39 035 4282422; email: service@LovatoElectric.com).

new
2010



Switch disconnectors
16A to 1250A

orange



Contactors



Digital multimeters and analyzers
DMG series




Automatic transfer switch controllers
ATL 10 type




Switching power supplies


PLANET Switch

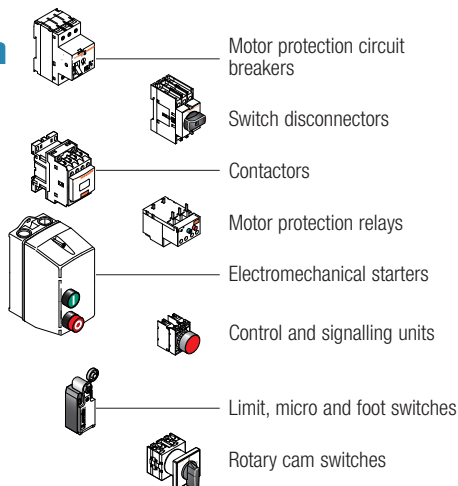

PLANET Din

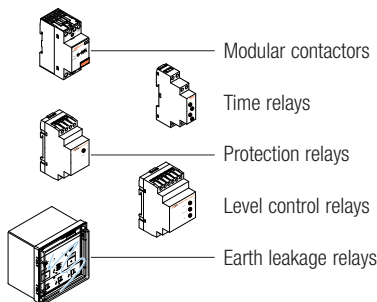

PLANET Logic

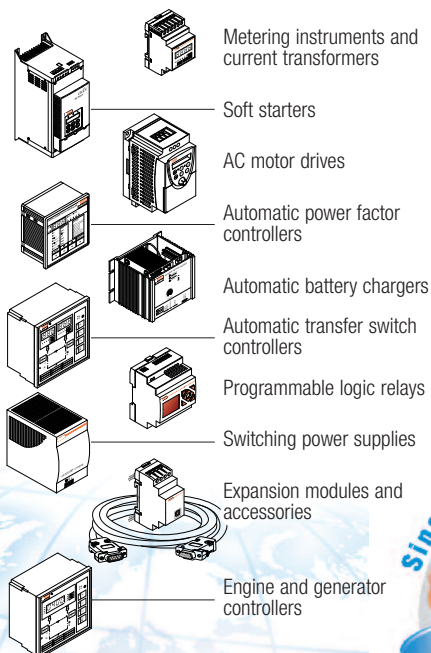

www.LovatoElectric.com

LOVATO ELECTRIC S.P.A.
CONTROL SOLUTIONS FOR INDUSTRY
VIA DON E. MAZZA, 12 - 24020 GORLE (BERGAMO) ITALY
Tel. +39 035 4282111 Fax +39 035 4282200
E-mail: info@LovatoElectric.com

Sales Department: Tel. +39 035 4282354 - Fax +39 035 4282400

LOVATO Electric offices in the world

United Kingdom
LOVATO (UK) LTD
Tel. +44 8458 110023
www.Lovato.co.uk

Czech Republic
LOVATO S.R.O.
Tel. +420 382 265482
www.Lovato.cz

Germany
DELTEC LOVATO GmbH
Tel. +49 7237 1733
www.DeltecLovato.de

USA
LOVATO ELECTRIC INC
Tel. +1 757 545 4700
www.LovatoUsa.com

Spain
LOVATO ELECTRIC SLU
Tel. +34 93 7812016
www.LovatoElectric.es

Canada
LOVATO ELECTRIC CORPORATION
Tel. +1 450 681 9200
www.Lovato.ca

Poland
LOVATO ELECTRIC SP. Z O.O.
Tel. +48 71 7979010
www.LovatoElectric.pl

Mexico
LOVATO ELECTRIC DE MEXICO, S.A. DE C.V.
Tel. +52 555 3415662
www.LovatoElectric.com.mx



Present in over 90 countries

Lovato electric

100% electricity

The products described in this publication are subject to be revised or improved at any moment. Catalogue descriptions and details, such as technical and operational data, drawings, diagrams and instructions, etc., do not have any contractual value. In addition, products should be installed and used by qualified personnel and in compliance with the regulations in force for electrical systems in order to avoid damages and safety hazards.

ClaroEmporioCreativo@gmail.com

PD19 GB 10 10