


DEL/DRIVE® 25



"POSITIVE DRIVE ON SMALL PULLEY DIAMETERS"

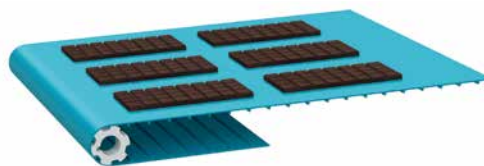

	DEL/DRIVE® 25	
	DDB25B5.3	DDB25B5.8
Reference		
Material	Polyurethane	
Colour	Blue	Blue
Top surface	Smooth	Smooth
Hardness	95 ShA	95 ShA
Pitch (mm)	25.3	25.3
Thickness (mm)	1.7	2
Overall thickness (mm)	5.3	5.8
Max. width (mm)	530	1200
Weights	2.8 kg/m ²	
Min. pulley diameter (mm)	48	56.7
Min. pulley diameter - back flex (mm)	50	60
Temperature range	-20°C to +60°C	
Traction force at 2% elongation	25 daN for a width of 100mm	30 daN for a width of 100mm
Friction coefficient		
On HDPE bed	0.2	
On stainless steel bed	0.55	



The DEL/DRIVE® 25 belt is flexible, light with a small pitch and thickness for smaller diameter sprockets. It thus reduces the space requirements of conveyors and facilitates the transfer of transported products.



DRIVE SPROCKETS



REFERENCE	MATERIAL	NUMBER OF TEETH	OUTER DIAMETER (mm)	BORE (mm)		WIDTH (mm)
				square bore	round bore	
P25WUN06	HDPE	6	48	-	25	25
P25WUN07	HDPE	7	56.7	-	25	25
P25WUN08	HDPE	8	65	-	25	25
P25WUN10	HDPE	10	81	40	-	25
P25WUN12	HDPE	12	97.5	40	-	25