

Descending devices




Set 1: abseiling device RDD10KT - rope - bag - hook - harness



Set 2: abseiling device RDD10KT - rope - arrester rope eye/eye - bag - hook - harness



Single attachment point EAP

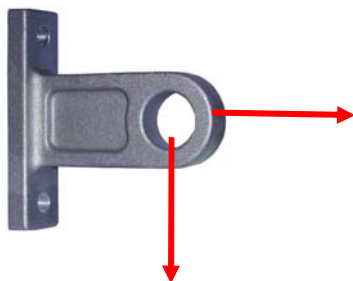

Safety carabiner hook aluminium B 1






Product Data
AG 10 Hub E Set
with 130 m Abseiling rope

consists of:

- Decender Rescue Device AG 10 Hub
EN 341 / EN 1496 CE 0158
with adapter E for ladder / rail and work positioning rope SK12/16
- Instruction for use
- Device rucksack
- Core sheathed rope 9 mm manufactured as abseiling rope with carabiner Alu 235, Length 130m

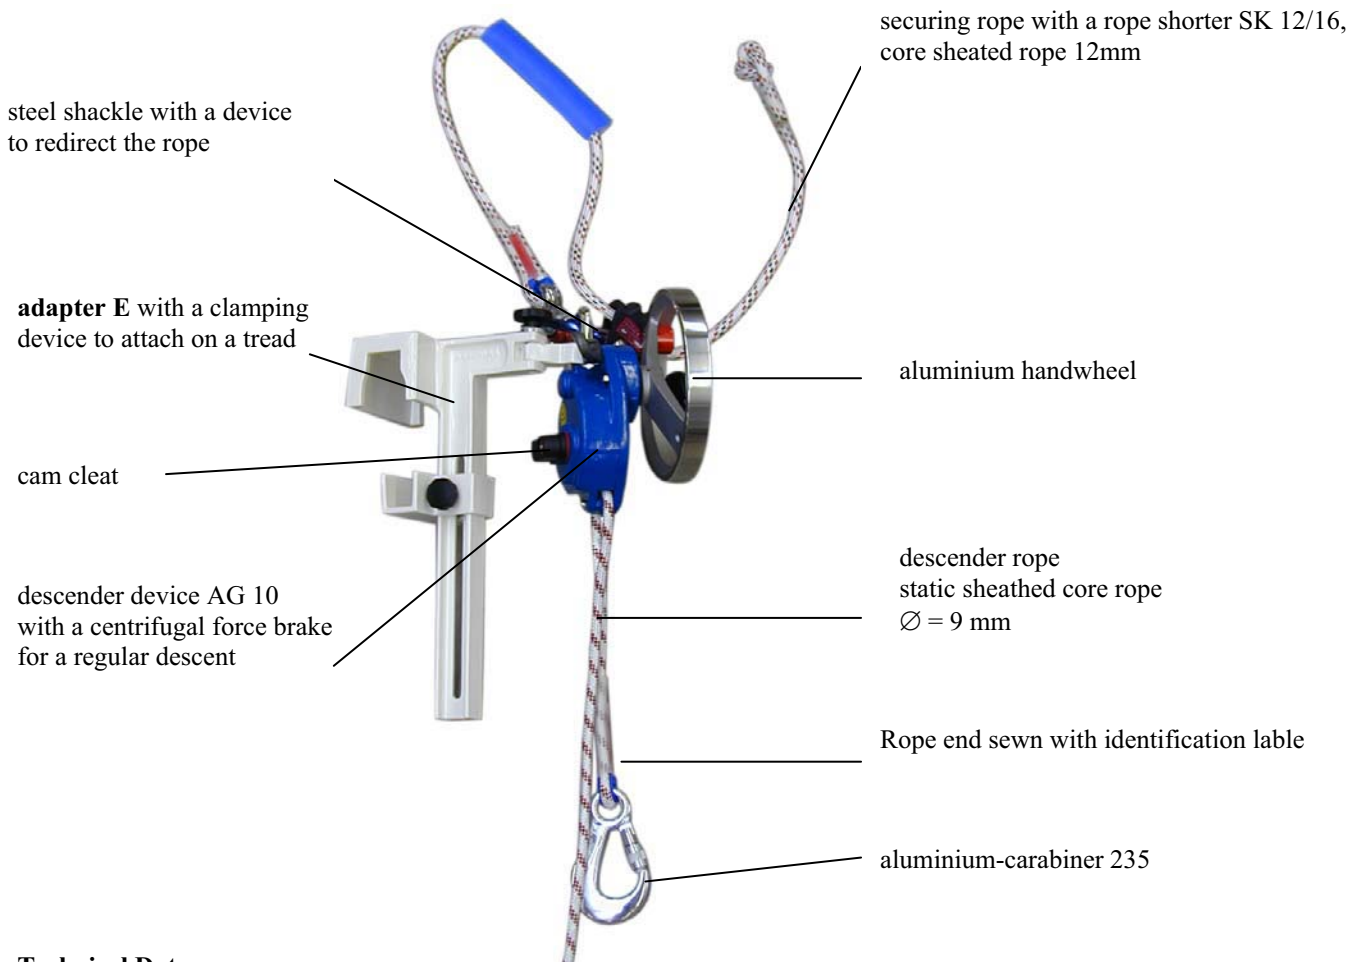

Technical Data


Device Class:	A
Permitted abseiling height:	max. 400m
Permitted abseiling height for 2 persons:	max. 100m
Max. abseiling load:	150kg
Max. abseiling load for 2 persons:	225kg
Abseiling speed :	Standard 0,7m/s

Product Data

Required accessory for the rescue from the ladder, out of the hub, from the gunwale:


consists of:

- Guided type fall arrester SK12-16 on a flexible anchorage line - RHK60-SK12/16 EN 353-2 CE 0158 (length 7,0 m)
- Rope clamp HK 12/16
- Header
- Device to keep away the rope
- Anchorage sling
- Bag for accessory

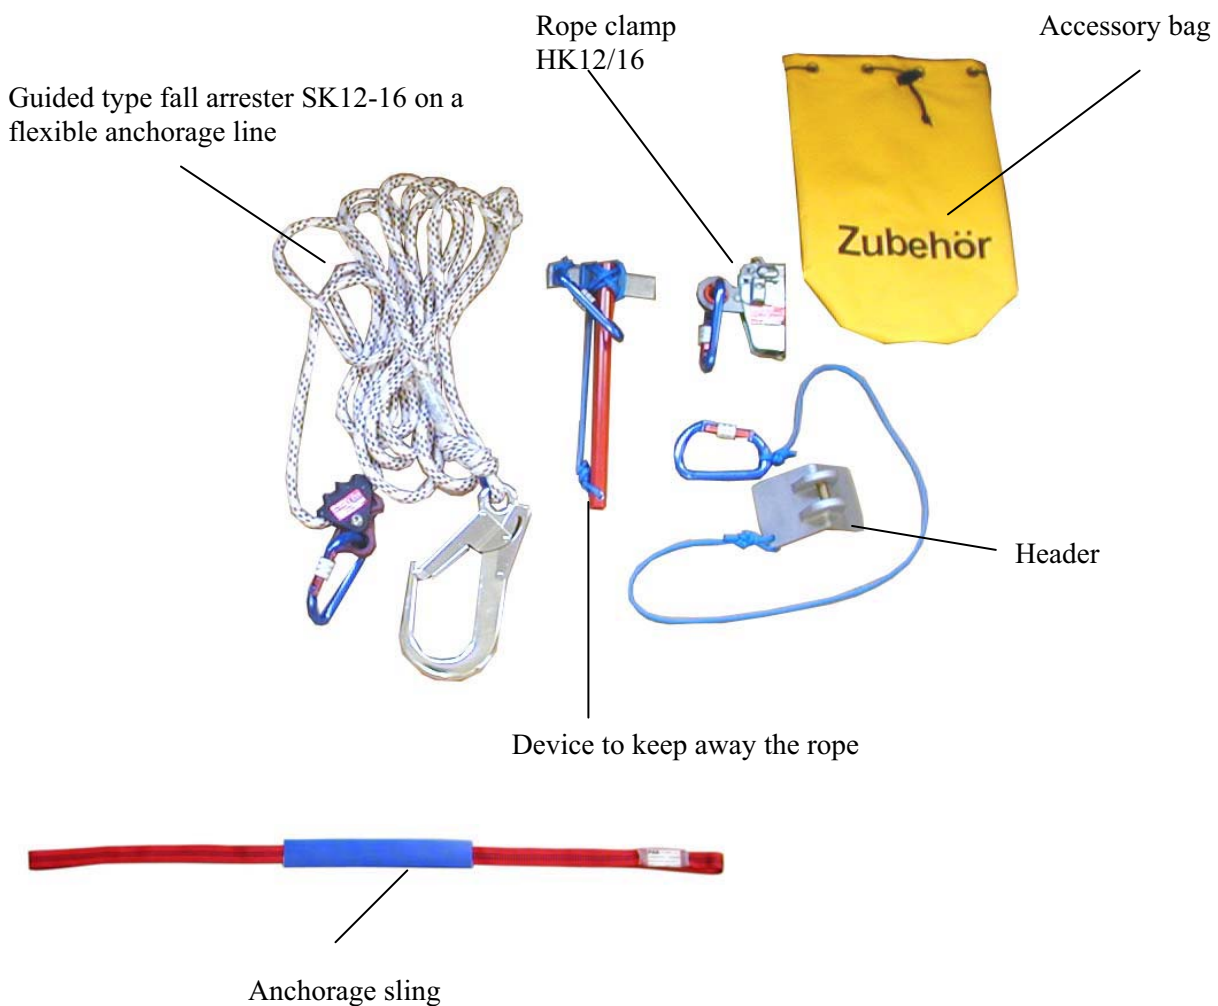



Product Data
Climbing Protection Glider AFG 8
for wire rope Ø 8mm

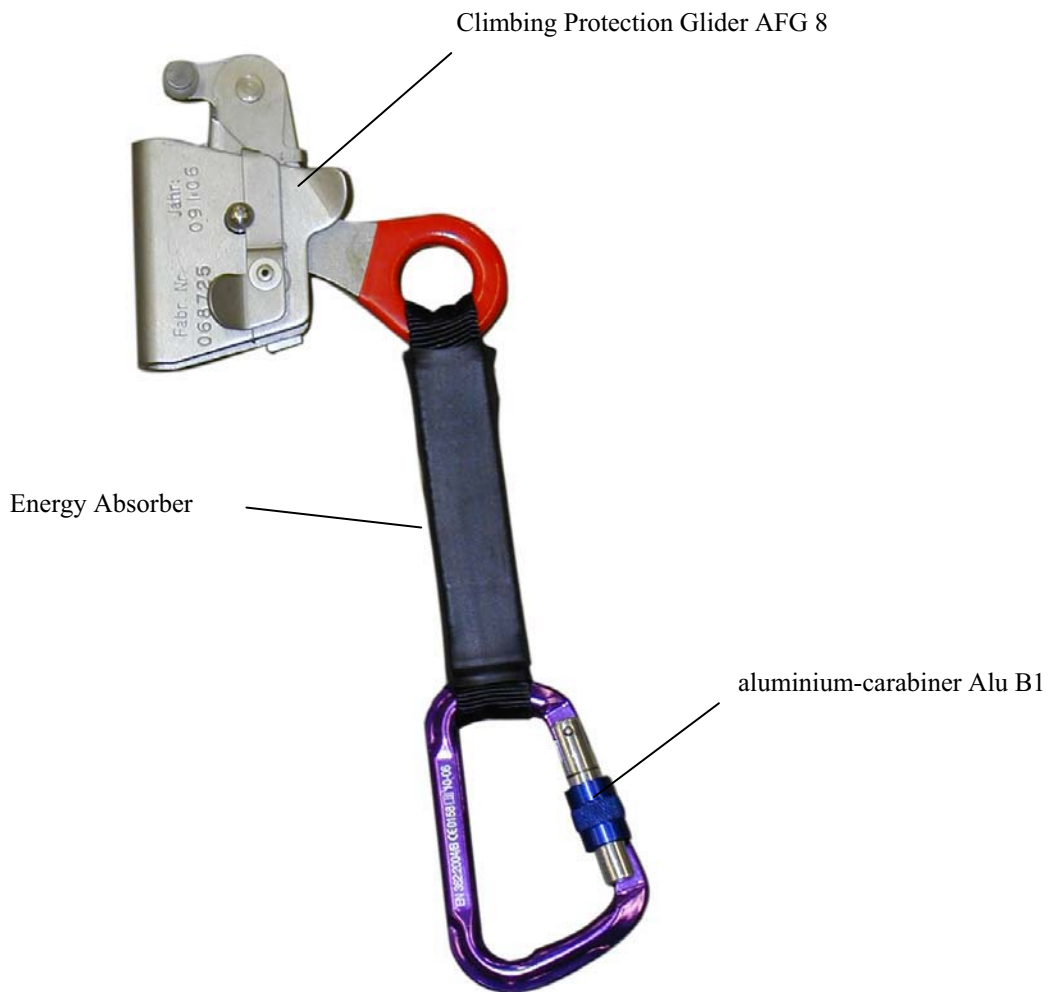




Product Data
Climbing Protection Glider AFG 5 with rotator
for wire rope Ø 8mm

Climbing Protection Glider AFG 5

Identification lable

Rotator

aluminium-carabiner Alu 235

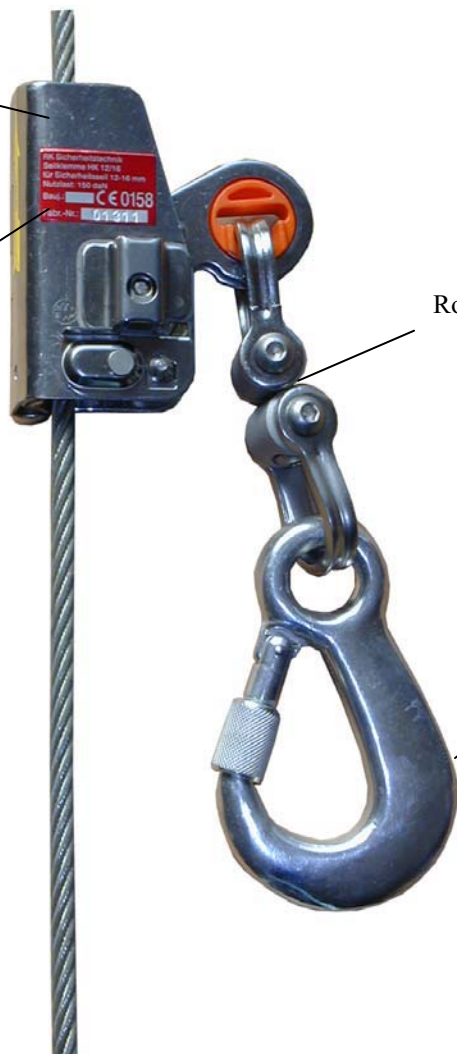



Product Data
Energy Absorber BFD S
EN 358 CE 0158

Consists of:


- Carabiner FS51 or Alu 235
- Energy Absorber BFD S

Technical Data:

Material: packed strap 45 mm
Measurement: 45 cm x 0,45 cm
Weight: 0,4 kg
maximum length of tearing open: 1,75 m


Carabiner FS 51

Energy Absorber BFD S

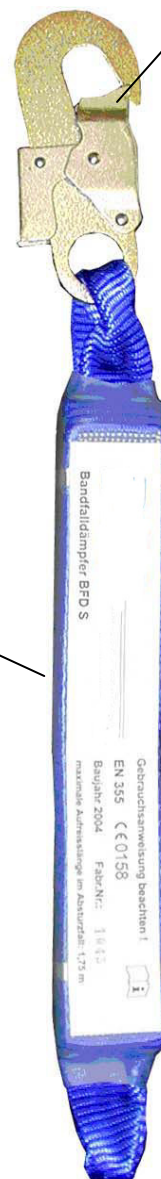



Product Data
Climbing Protection System
with wire rope Ø 8mm
Intermediate rope guide
Wire rope Ø 8mm

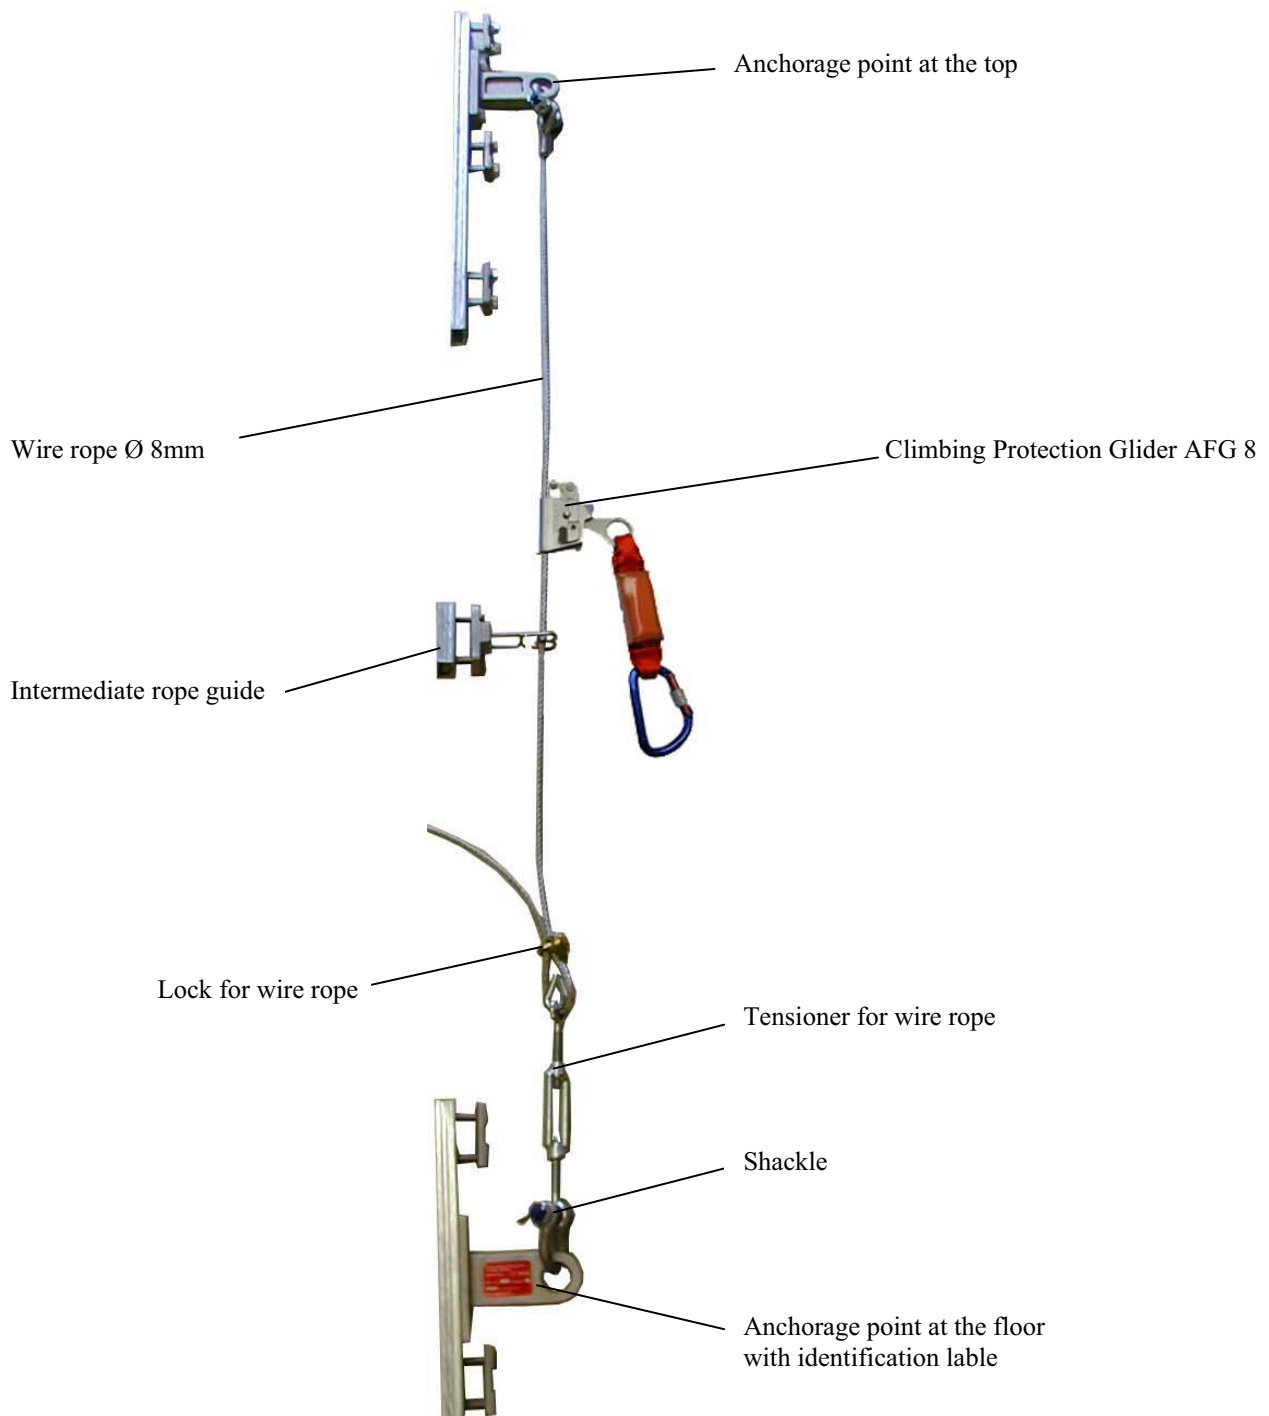



Product Data


Work Positioning rope, Length 1 m

RHK60-KM12/1,0m-FS51

EN 358 CE 0158

Description

Core Sheathed rope 12 mm, Length
1,0m, manufactured with Alu Carabiner
RHK60and Steel Carabiner FS51

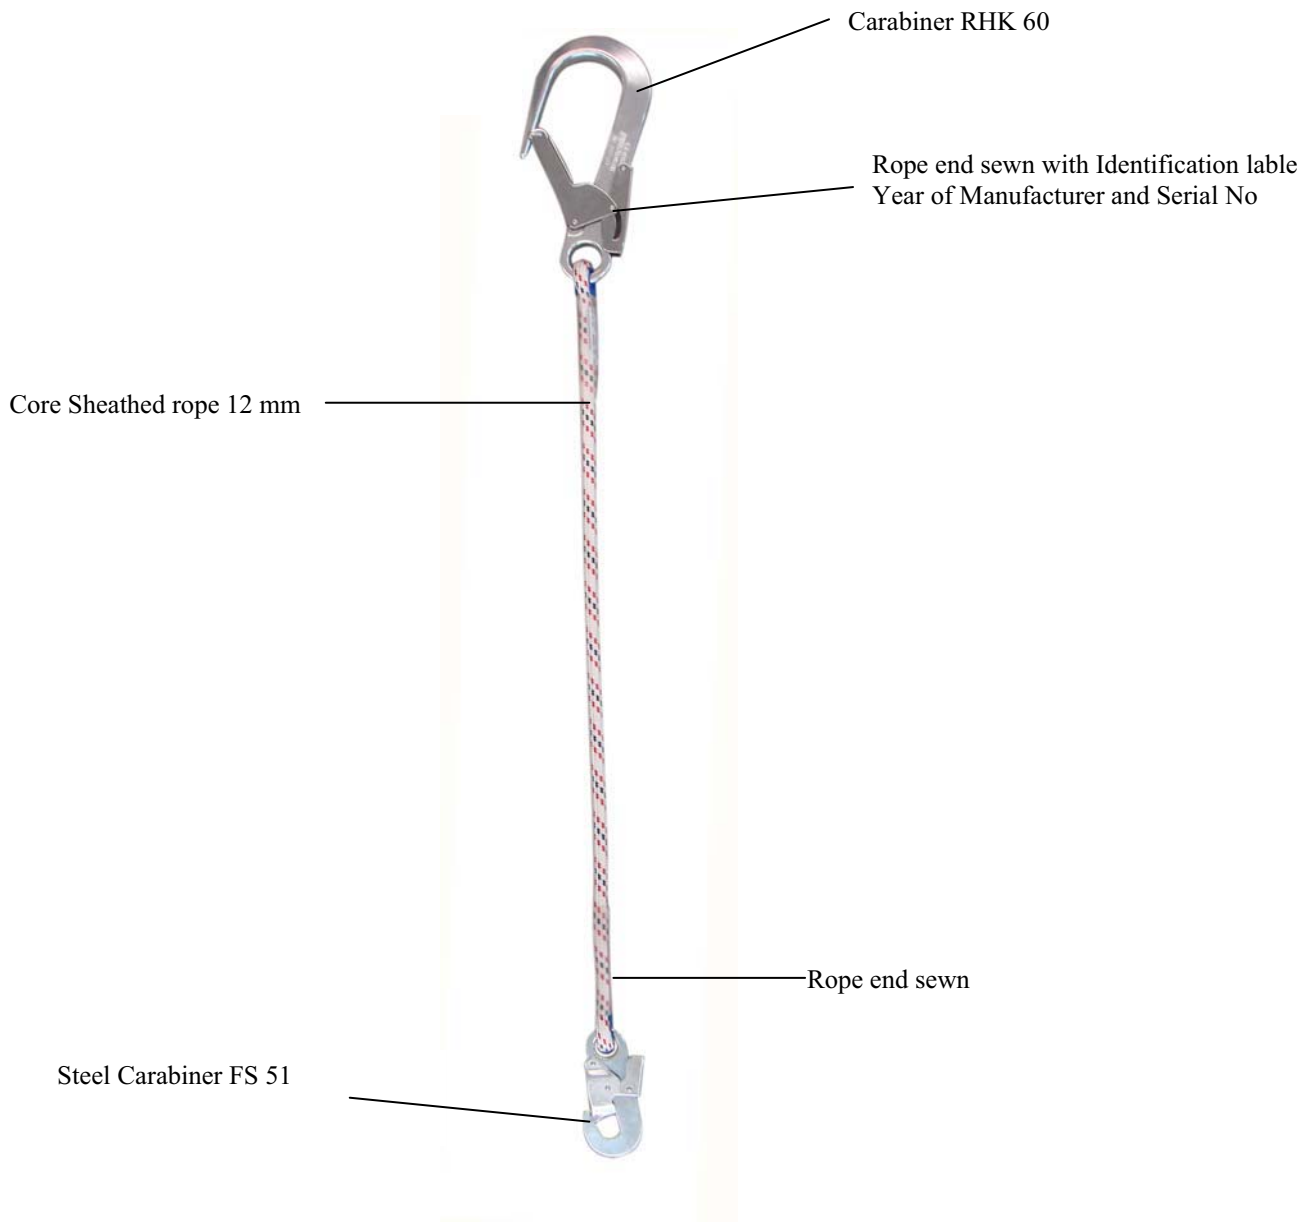



Product Data


Work Positioning rope, Length 2 m

RHK60-SK12/16-2,0m-EK

EN 358 CE 0158

Description

Core Sheathed rope 12 mm manufactured with Alu Carabiner RHK 60, with Rope Shortener and Endknot Standardlength 2,0m

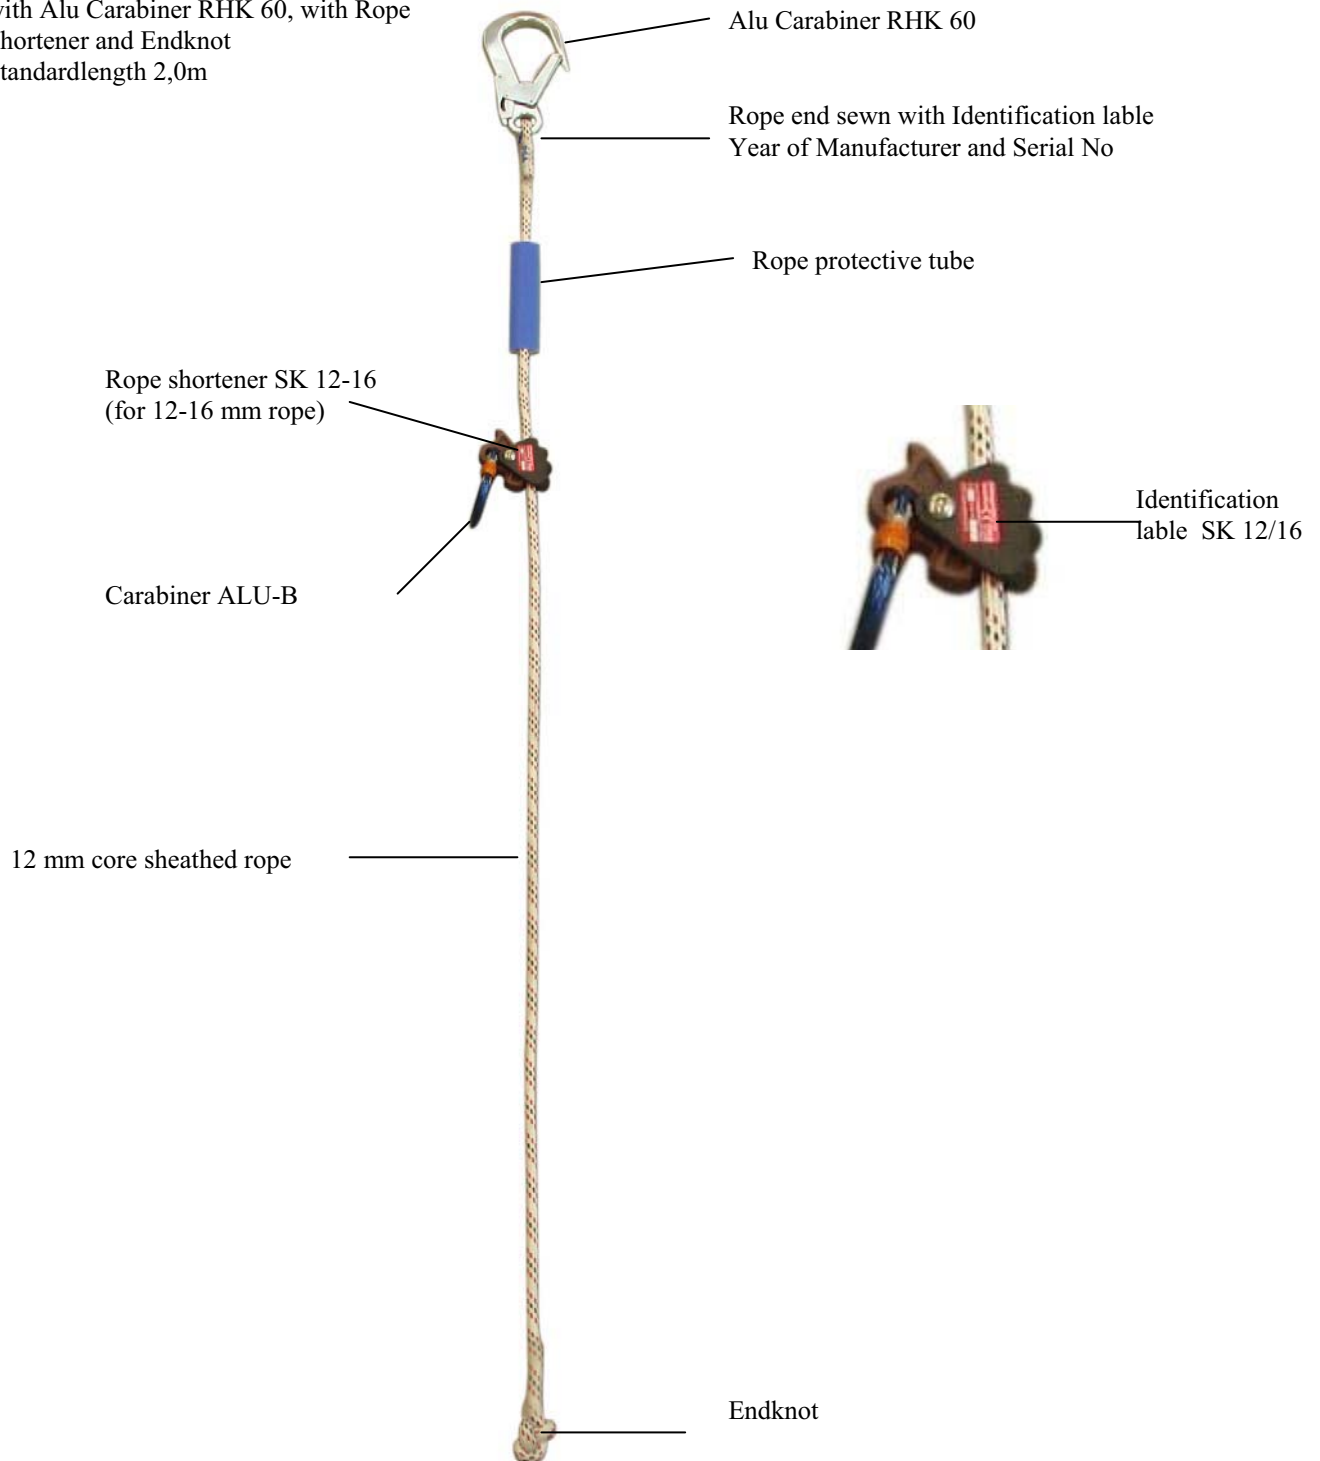



Product Data
Device Rucksack

Material: water-repellend cortex
with padded shoulder straps and stuff lock

L= ca. 30 L



Size 1: D= 280mm H= 700mm → usable height: 500mm

Colour: black or blue





Product Data
Full Body Harness RKA UNI
EN 361 / EN 358 CE 0158

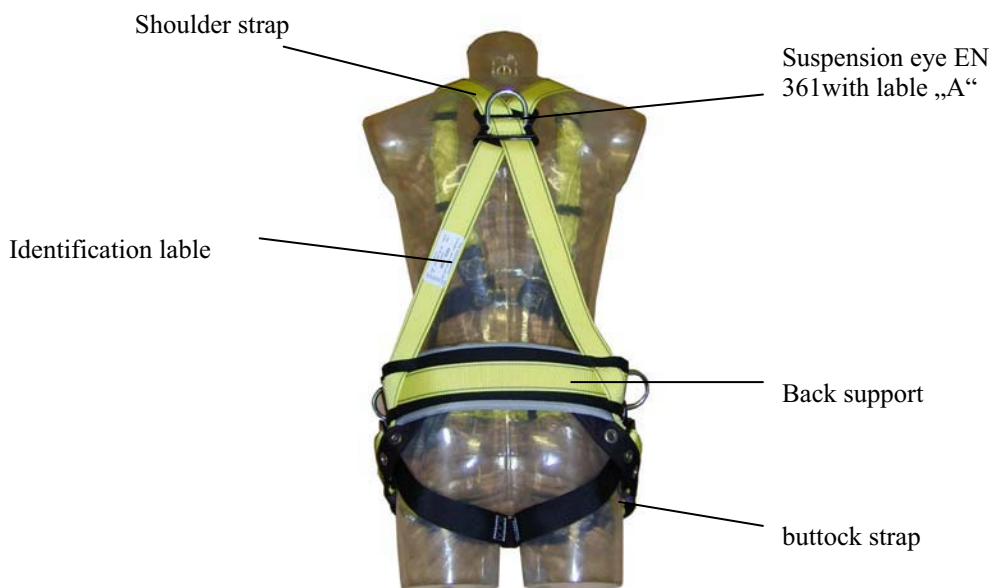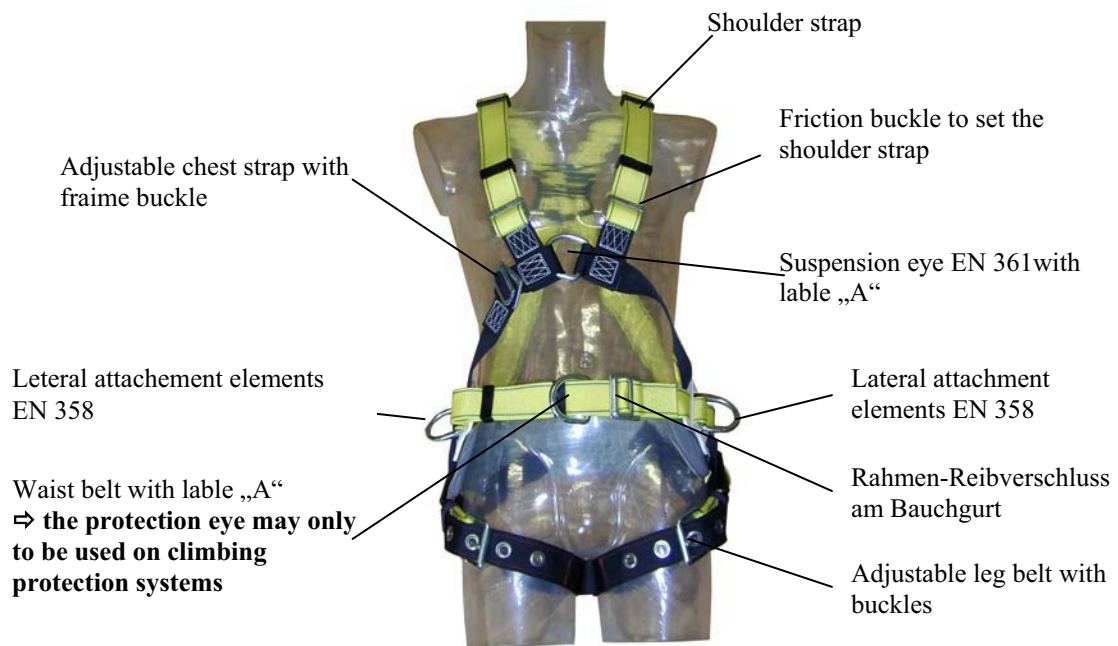



Full Body Harness with vest RKA 18- Wx
EN 361 CE 0158

Available colours (x):

B : blue,

O : orange

Y : yellow

- vest not available separately