



Main Features

- Support EZ Mesh and client Wi-Fi operation mode
- Selectable 2.4GHz/5GHz
- Support Serial, Ethernet and Wi-Fi interface
- Support Modbus TCP, RTU, ASCII/ MQTT/ Transparent
- Built-in offline port buffer with over 20 MB of storage
- High immunity to surge, ESD & EFT level-4 protection
- Up to 921.6 Kbps baud rate for RS-232/422/485 transmissions
- Web-based configuration
- SNTP client for time synchronization
- Support nCare remote configuration
- Redundant power with DC (12~48V) and 802.3at PoE input
- Wide operation temperature from -40°C to 75°C
- M12 version for AGV application

Product Overview

NIO 51 brings the wireless connectivity from serial devices or Ethernet devices perfectly to Wi-Fi Mesh backbone in smart factories. Thanks for the Wi-Fi Mesh technology, every device connecting to NIO 51 can easily keep multiple Wi-Fi connecting paths to either IWF 300/310 EZ Mesh backbone or neighbor NIO51 devices to communicate with the control center even the devices are in moving status such as AGV application in factories.

NIO 51 provides flexible conversion between Modbus RTU to Modbus TCP protocols as well as serial to Ethernet/Wi-Fi interfaces within one box. It's also equipped with high immunity to EMC level-4 protection in Surge, ESD and EFT, wide operation temperature and redundant power so people do not need to concern about impact from harsh environment. Optional mPCIe port can be used as 3G/LTE WAN connection in the mobility applications or the environments where no Wi-Fi coverage is possible.

For Fieldbus-based controllers, legacy manufacturing machines, and serial-based devices, NIO 51 fills the communication gap between edge nodes to the cloud, enabling field data to be harnessed for manufacturing process optimization, asset management, and preventive maintenance.

Specifications

Wi-Fi Radio

- IEEE802.11a/b/g/n , MIMO 2 x 2

Serial Interface

- RS232/422/485 with isolation
 - Data bits: 8
 - Stop bits: 1
 - Parity: none, even, odd
 - RTS/CTS (UART)
 - Baud rate: 9600 bps to 921.6 Kbps

Ethernet Interface

- 10/100 Mbps

Power Supply

- 12~48 VDC
- 802.3at PD

LED Indicator

- 1 x Power/status
- 1 x Serial status
- 3 x RSSI indicator
- 1 x Wi-Fi 2.4/5GHz indicator

- 1 x Link/Act indicator
- 1 x Extension module

Factory Default/Reset Button

- Press reset button 10 seconds interval for factory default

Connector type


- M12 version
 - DC input: M12, D-code, 4-pin (female)
 - Ethernet: M12, A-code, 8-pin (female)
- RJ version
 - DC INPUT: Phoenix contact terminal block
 - Ethernet: RJ-45 connector

Wi-Fi Operating Mode

- EZ Mesh
- Client router

Wi-Fi Security (Client Mode)

- WEP (64/128)
- WPA/WPA2 mixed
- WPA2-personal (PSK+CCMP/AES)
- WPA2 enterprise client

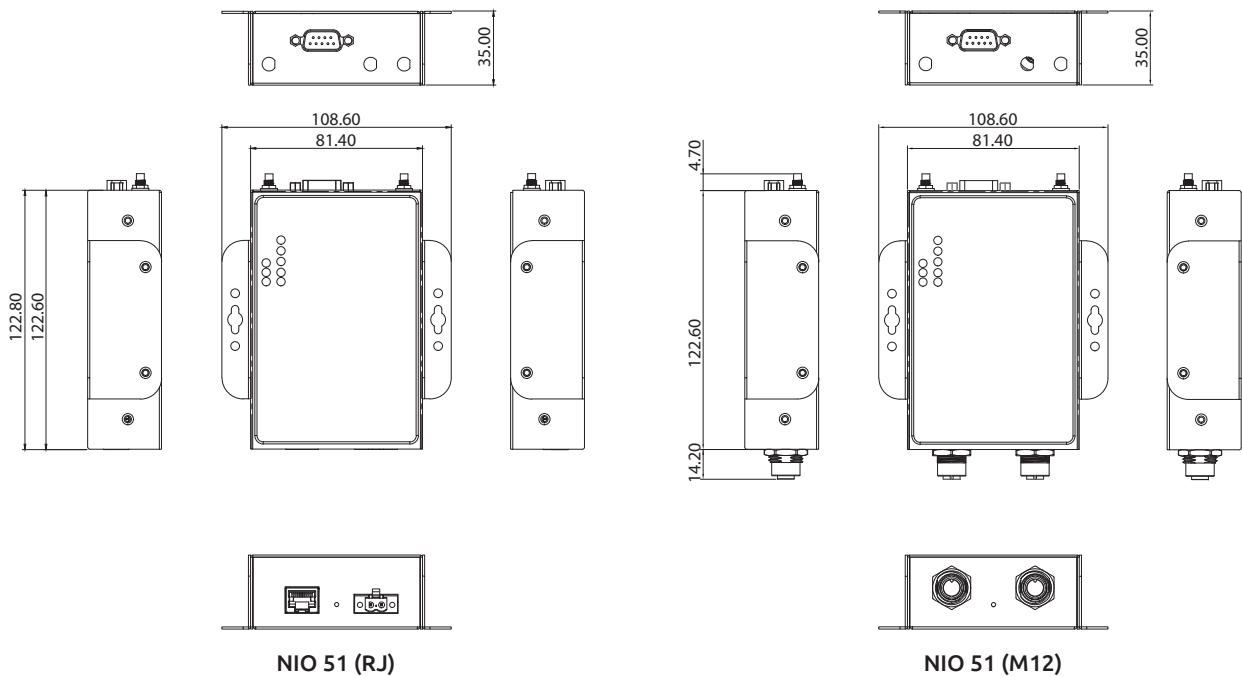

Protocol

- ♦ Modbus TCP
- ♦ Modbus RTU
- ♦ Modbus ASCII
- ♦ MQTT client for serial/Ethernet to Wi-Fi (Phase II)
- ♦ Transparent mode for Serial to Wi-Fi/Ethernet
 - Serial to Ethernet/Wi-Fi
 - Serial port: master/slave selectable
 - Ethernet port: TCP server/client selectable
 - Wi-Fi port: TCP server/client selectable
 - Applications are limited to following condition
 - Serial slave to TCP client
 - Serial master to TCP server

Serial Port Characteristics

- ♦ Flow control: XON/XOFF
- ♦ Serial data log: 64 KB
- ♦ Offline port buffering: 20MB

Software Watchdog

Dimension

- ♦ 81.4 mm x 122.6 mm x 35 mm

Mounting

- ♦ Wall mounting
- ♦ DIN mounting

Construction

- ♦ SGCC chassis with fanless design

Certification

- ♦ EMI: FCC, CE Class A
- ♦ RF
 - FCC: Part 15C
 - CE: EN300328, EN301893
- ♦ EN60950-1
- ♦ EMC
 - EN301 489-1/17, FCC Part 15 subpart B, EN55022/55024
 - IEC61000-4-2/4/5 level 4
 - Serial line surge protection: 1KV (level 2)

Environment

- ♦ Operating temp: -40°C to 75°C
- ♦ Storage temp: -40°C to 85°C
- ♦ Relative humidity: operating: 5%~95%, non-condensing
- ♦ RoHS compliant
- ♦ Vibration
 - Random: 2Grms @ 5~500 Hz, IEC60068-2-64
 - Sinusoidal: 2Grms @ 5~500 Hz, IEC60068-2-6
- ♦ Shock: 50G, half sine, 11ms, IEC60068-27

Ordering Information

- ♦ **NIO 51 (P/N: 10T00005100X0)**
Industrial Mesh Wi-Fi Serial/Ethernet device server