



- PROGRAMMABLE ISOLATED TRANSMITTERS
- MEASURING RATE - UP TO 7 500 MEASUR./S
- TEACH-IN
- OUTPUT: 4...20 mA/0...10 V
- POWER SUPPLY 18...30 VDC
- Option
  - Excitation • Data output • Power supply 10...30 V AC/DC

## OMX 380

**OMLINK**

The OMX 380 model range are very fast digital transmitters to DIN rail with and Teach-in function.

Modifications available are PM, DU and T.

The instrument is based on a single chip microcontroller, 24-bit A/D and 16-bit D/A converter, which ensures good accuracy, stability and easy operation of the instrument.

**OMX 380PM**  
PROCESS MONITOR

**OMX 380DU**  
TRANSMITTER FOR LINEAR POTENTIOMETERS

**OMX 380T**  
TRANSMITTER FOR STRAIN GAUGE

### OPERATION

The instrument is controlled by two push buttons on the front panel. The mode of the output signal and the access to the teach-in mode is realised by a switch at the rear. Standard equipment is the OM Link interface, which together with operating program allows modification and filing of all instrument's settings as well as performing firmware updates (with OML cable).

All settings are stored in the EEPROM memory (they are retained even after the instrument is switched off).

### OPTIONS

**EXCITATION** is suitable for powering sensors and transmitters. It is not galvanically isolated. The set values are either 24 V.

**DATA OUTPUTS** are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an RS485 with the ASCII/MODBUS protocol.

### STANDARD FUNCTIONS

#### PROGRAMMABLE INPUT

**Selection of:** measuring range

**Setting:** Teach-in, allows easy setting of both min. and max. of the measuring range

#### ANALOG OUTPUT

**Type:** programmable with resolution 16 bit, rate < 0,2 ms

**Range:** 0...10 V, 4...20 mA

#### EXCITATION

**Fixed:** 13,8 V (by supply 18...30 V) or 15 V (by supply 10...30 V)

## TECHNICAL DATA

### INSTRUMENT ACCURACY

TC: 10 ppm/°C  
 Accuracy: ±0,01% of range  
 Rate: 1 000...7 500 meas./s  
 Overload capacity: 10x [t < 30 ms]; 2x  
 Watch-dog: reset after 20 ms  
 Functions: Teach-in  
 OM Link: Company communication interface for operation, setting and update of instruments  
 Calibration: at 25°C and 40% r.h.

### DATA OUTPUT

Type: RS 485  
 Protocol: ASCII, MODBUS - RTU  
 Data format: 8 bit + no parity + 1 stop bit  
 Rate: 600...115 200 Baud  
 Addressing: ASCII - max. 31 instruments  
 MODBUS - max. 246 instruments

### ANALOG OUTPUT

Type: programmable with resolution of 16 bit, type and range are selectable  
 Non-linearity: 0,01% of range  
 TC: 10 ppm/°C  
 Rate: response to change of value < 0,2 ms  
 Ranges: 0...10 V, 4...20 mA (comp. < 500 Ω)  
 Ripple: 5 mV residual ripple at output voltage of 10 V

### EXCITATION

Fixed (PM): 13,8 VDC/max. 20 mA [by supply 18...30 V]  
 15 VDC/max. 40 mA [by supply 10...30 V]  
 24 VDC/max. 40 mA [by supply 10...30 V]  
 Fixed (DU): 10 V (±0,2 %)  
 Fixed (T): 10 V, max. load 150 Ω

### POWER SUPPLY

18...30 VDC, ±10 %, max. 2,5 W, I<sub>STP</sub> < 40 A/1 ms  
 10...30 VDC, ±10 %, max. 2,5 W, PF ≥ 0,4, I<sub>STP</sub> < 40 A/1 ms, isolated

### MECHANIC PROPERTIES

Material: PA 66, incombustible UL 94 V-0, blue  
 Dimensions: 90,5 x 79 x 25 mm  
 Installation: to DIN rail 35 mm wide

### OPERATING CONDITIONS

Connection: connector terminal board, section < 1,5/2,5 mm²  
 Stabilization period: within 15 minutes after switch-on  
 Working temperature: -20°...60°C  
 Storage temperature: -20°...85°C  
 Cover: IP20  
 El. safety: EN 61010-1, A2  
 Dielectric strength: 2,5 kVAC after 1 min between supply/input/outputs  
 Insulation resistance: for pollution degree II, measuring cat. III, power supply > 550 V (PI), 255 V (DI)  
 EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

## MEASURING RANGES

OMX 380 is available in these modifications and measuring ranges

PM: 0...20 mA/4...20 mA/0...10 V  
 DU: Linear potentiometer (min. 500 Ω)  
 T: 1...4 mV, 2...8 mV, 4...16 mV/V


### CONNECTING INDIVIDUAL INPUTS

	INPUT „I“	INPUT „U“
PM	0...20 mA, 4...20 mA	0...10 V

### ORDER CODE SPECIFICATION

	T
A	1...4 mV/V
B	1...8 mV/V
C	4...16 mV/V
Z	on request

## CONNECTION

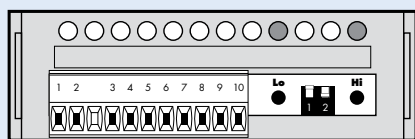

## ORDER CODE

### OMX 380

□ □ - □ □ □ □ - □ □

Type	P	M	D	U	T*
Order code shall not include blank spaces!	•	•	•	•	•
Power supply	18...30 VDC	10...30 VDC, isolated	0	1	
Measuring range, see table „Order code specification“				?	
Output	Analogue	Data - RS 485, ASCII*	1	2	3
Excitation	13,8/15 VDC	24 VDC		0	1
Other	customer version, do not fill in				00

Default execution is shown in bold

\* Launch for sale has not been set