

## NEW lightweight portable mini pump unit Type MPS up to 2500 bar



Resato MPS mini pump unit

Resato's new lightweight mini pump unit is available in four pressure ranges up to 1800 bar at 7 bar air drive pressure and 2500 bar at 10 bar air drive pressure.

### Key Features

- Ready-to-use weight of less than 17 kg!
- Lightweight, easy to carry
- Low noise level
- Suitable for pressurizing oil, water or other fluids
- Several pressure ranges available
- All parts made of non-corrosive materials
- All operating features panel mounted
- Completely closed frame.

### Functioning

The Resato mini pump unit type MPS can be used for bolt tensioning and pressure testing. It can also be used for operation of hydraulic cylinders or jacks.

The weight of the unit is below 17 kg with a filled tank, which makes it easy to carry even on stairs. All components, including the required connecting materials and tubing are mounted in a solid plastic closed frame. The Resato mini pump unit type MPS is manufactured according to European regulations and will be delivered including:

- Operating manual, Maintenance manual and spare parts manual
- Test certificate
- Calibration certificates for gauges.

### Standard equipped with:

- Resato mini pump P80
- Bleed valve
- Outlet gauge, stainless steel 100 mm
- Air gauge, stainless steel 63 mm
- Start stop valve
- Air regulator
- 4 liter reservoir.

### Option

- Hand lever.

### Flow curves

For flow curves, refer to the back of this leaf let.

## RESATO INTERNATIONAL BV

1e Energieweg 13  
P.O. Box 30

NL-9301 LK  
NL-9300 AA

Roden – Holland  
Roden - Holland

Phone: +31 (0) 50 501 6877  
Fax: +31 (0) 50 501 2402





E-mail: [hpsales@resato.com](mailto:hpsales@resato.com)  
Internet: [www.resato.com](http://www.resato.com)

Please note that general data and specifications given in this brochure are subject to change without notice.

Feel free to contact our sales department if you need more definite information.

080814

## Flow curves Resato MPS series

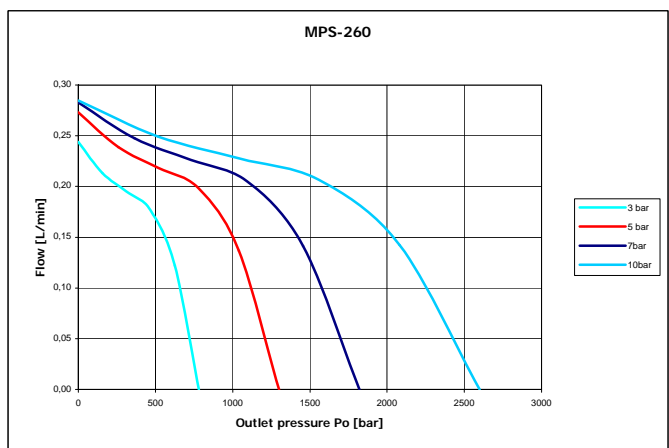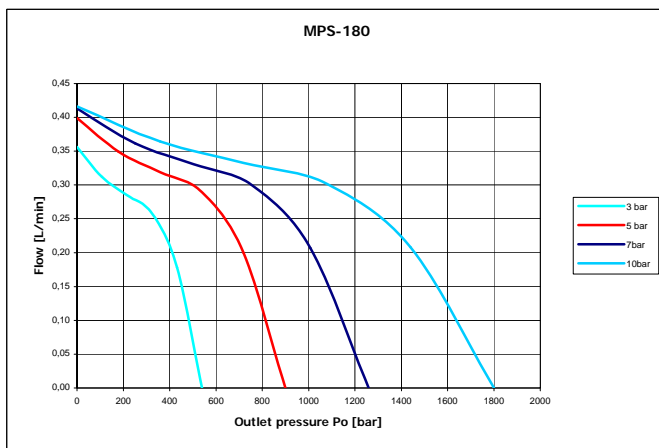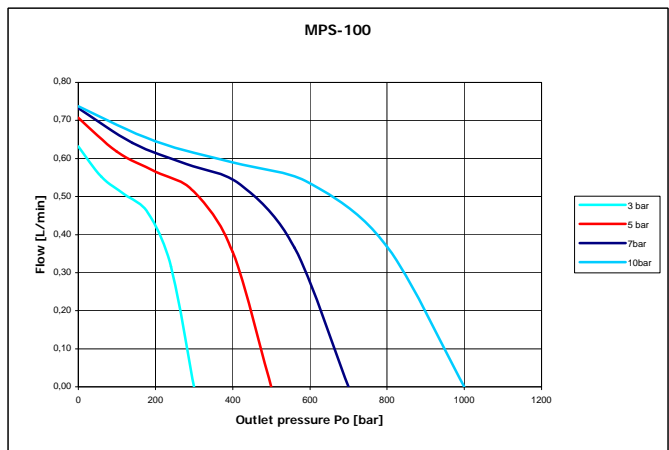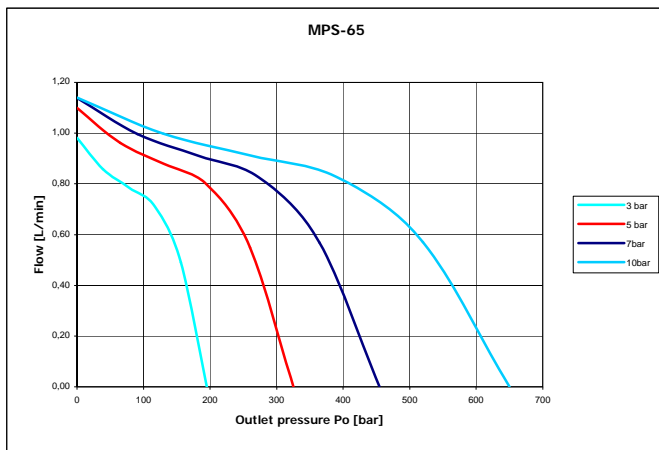

## RESATO INTERNATIONAL BV

1e Energieweg 13  
P.O. Box 30

NL-9301 LK  
NL-9300 AA

Roden - Holland  
Roden - Holland

Phone: +31 (0) 50 501 6877  
Fax: +31 (0) 50 501 2402

E-mail: [hpsales@resato.com](mailto:hpsales@resato.com)  
Internet: [www.resato.com](http://www.resato.com)

Please note that general data and specifications given in this brochure are subject to change without notice.

Feel free to contact our sales department if you need more definite information.

080814