



3SB66 DPN Circuit Breaker




Application

3SB66 miniature circuit breaker applies to locations such as industrial, commercial, high rise and civil residence with AC 230V and below for terminal distribution protection (overload and short circuit protection), can also be used to infrequent making and breaking operations. This breaker complies with standards of IEC 60898.

Specifications

Rated voltage:	AC 230V
Rated frequency:	50Hz/60Hz
Rated current:	6, 10, 16, 20, 25, 32, 40A
Number of poles:	1P+N
Tripping characteristic:	С
Rated ultimate short circuit breaking capacity (Icu):	6000A
Rated service short circuit breaking capacity (Ics):	6000A
Mechanical life:	20000 times

Dimensions

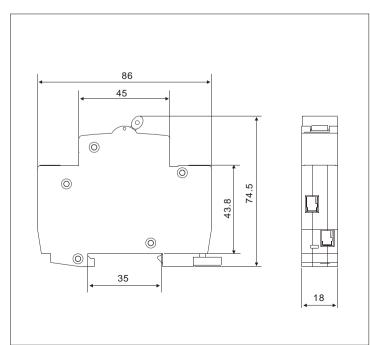

4t(s) 10000 5000 1H 2000 1000 500 200 100 50 20 10 5 2 1 0.5 0.2 0.1 0.05 0.02 0.01 0.005 0.00∠ 0.001 0.5 0.002 20 30 50 70 100 200 1/ln 3 45 7 10 2

Characteristic Curve