

MPM281 High Stable Piezoresistive OEM Pressure Sensor

Features

- Pressure range 0 ~ 7kPa...100MPa
- Gauge, absolute, sealed gauge
- Constant current / Constant Voltage power supply
- Isolated construction, enable to measure various media
- Φ 19mm standard OEM pressure sensor
- Full stainless steel 316L
- Wide temperature compensation -10°C ~ 80°C
- Long-term stability \pm 0.1%FS/year



Application

- Industrial process control
- Level measurement
- Gas, liquid pressure measurement
- Pressure checking meter
- Pressure calibrator
- Liquid pressure system and switch
- Cooling equipment and air conditioning system
- Aviation and navigation inspection

Introduction

MPM281 high stable OEM sensor is the piezoresistive pressure sensor with isolated construction and precise compensation. It uses high stable silicon die, stainless steel 316L housing with diameter Φ 19mm. Wider temperature compensation and zero correction are calibrated by laser trimming technics. The measured pressure is transmitted onto silicon die through 316L diaphragm and inner media, to transform the pressure to electric signal.

MPM281 pressure sensor is inspected and screened on automatic production line, testing and checking time after time strictly. It is widely used for various pressure measurement fields.

Electric Performance

Power supply: \leq 2.0mA DC; \leq 10V DC

Electric connection: ϕ 0.5mm Kovar pin or 100mm silicon rubber flexible wires

Common mode voltage output: 50% input (typ.)

Input impedance: 3k Ω ~ 8k Ω

Output impedance: 3.5k Ω ~ 6k Ω

Response (10% ~ 90%): <1ms

Insulation resistor: 100M Ω , 100VDC

Overpressure: 1.5 times FS

Construction Performance

Diaphragm: stainless steel 316L

Housing: stainless steel 316L

Pressure leading tube : stainless steel 316L

Pin: Kovar

O-ring: Viton

Net weight: ~ 16g

<http://www.microsensor.cn>

Add: No.18, Yingda Road Baoji, P.R.China, 721006

Tel: +86 917 3600739/3600832 Fax: 3609977

MICRO SENSOR CO.,LTD.

Environment Condition

Shock: no change at 10gRMS, (20 ~ 2000) Hz

Impact: 100g, 11ms

Media compatibility: the gas or liquid which is compatible with stainless steel and Viton

Basic Condition

Media temperature: (35±1)°C

Environment temperature: (35±1)°C

Shock: 0.1g(1m/s²)Max

Humidity: (50%±10%)RH

Local air pressure: (86 ~ 106)kPa


Power supply: (1.5±0.0015)mADC

Basic Specification

Item*	Min.	Typ.	Max.	Units
Linearity		±0.15	±0.20	%FS,BFSL
Repeatability		±0.05	±0.075	%FS
Hysteresis		±0.05	±0.075	%FS
Zero output			±2	mV DC
FS output **	70			mV DC
Zero thermal error***		±0.75	±1.0	%FS,@35°C
Span thermal error		±0.75	±1.0	%FS,@35°C
Compensated temp. range		-10 ~ 80 0 ~ 70 (7kPa,20 kPa,35 kPa)		°C
Working temp. range		-40 ~ 125		°C
Storage temp. range		-40 ~ 125		°C
Stability error		±0.1	±0.2	%FS/year

*testing at basic condition
 ** for range code 0C, FS output ≥45mV
 ***for rang code 0C, Zero thermal error ≤1.5%FS

Outline Construction (Unit: mm)

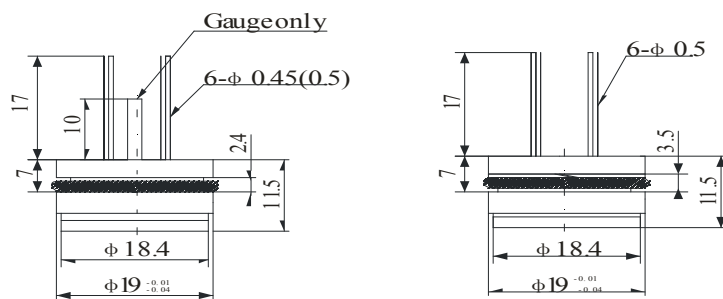

The suggested installation dimension is $\Phi 19^{+0.05}_{+0.02}$ mm

<http://www.microsensor.cn>


Add: No.18,Yingda Road Baoji,P.R.China, 721006

Tel: +86 917 3600739/3600832 Fax: 3609977

MICRO SENSOR CO.,LTD.



Electric Connection

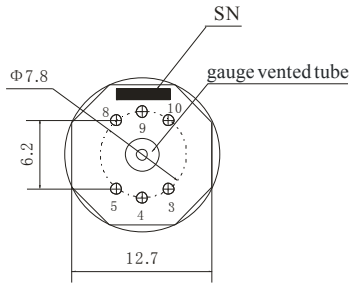

Pin	Electric connection	Wire color
4	-OUT	Blue
5	-IN	Yellow
8	+IN	Black
9	+OUT	Red
For range 02/03		

Pin	Electric connection	Wire color
4	+OUT	Red
5	-IN	Yellow
8	+IN	Black
9	-OUT	Blue
For other range		

Note: The actual electric connection method, please check the parameter label enclosed with products.

Order Guide

MPM281	High Stable Piezoresistive OEM Pressure Sensor					
	Range code	Pressure range	Ref.	Range code	Pressure range	Ref.
	0C	0kPa ~ 7kPa	G	12	0MPa ~ 2MPa	G.A
	0B	0kPa ~ 20kPa	G	13	0MPa ~ 3.5MPa	G.A.S
	0A	0kPa ~ 35kPa	G.A	14	0MPa ~ 7MPa	S.A
	02	0kPa ~ 70kPa	G.A	15	0MPa ~ 10MPa	S.A
	03	0kPa ~ 100kPa	G.A	17	0MPa ~ 20MPa	S.A
	07	0kPa ~ 200kPa	G.A	18	0MPa ~ 35MPa	S.A
	08	0kPa ~ 350kPa	G.A	19	0MPa ~ 70MPa	S.A
	09	0kPa ~ 700kPa	G.A	20	0MPa ~ 100MPa	S.A
	10	0kPa ~ 1000kPa	G.A			

Code	Pressure type
G	Gauge
A	Absolute
S	Sealed gauge

Code	Pressure connection
0	O-ring

Code	Compensation
L	Laser trimming
M	Outer compensated resistor (providing resistor value)

Code	Electric connection
1	Kovar pin(default)
2*	100mm silicon rubber flexible wires

Code	Special measurement
Y	Gauge sensor to measure vacuum

MPM281	07	G	0	L	1	Y	the whole spec
--------	----	---	---	---	---	---	----------------

<http://www.microsensor.cn>

Add: No.18, Yingda Road Baoji, P.R.China, 721006

Tel: +86 917 3600739/3600832 Fax: 3609977

MICRO SENSOR CO.,LTD.



Notes

- 1.It is recommended that the sensor should be installed as Suspended Mode to avoid face type seal and avoid affecting sensor stability.
- 2.Please pay attention to protect the diaphragm and the compensated board to prevent any damage or bad performance.
- 3.Temperature resistant range of standard Viton O-ring of sensor is $-20^{\circ}\text{C} \sim 250^{\circ}\text{C}$. When working temperature is lower than -20°C , or sensor is applied in critical environment, please contact us.