

COMPRESSION LOCK

040





IP 65


LH

RH

RoHS

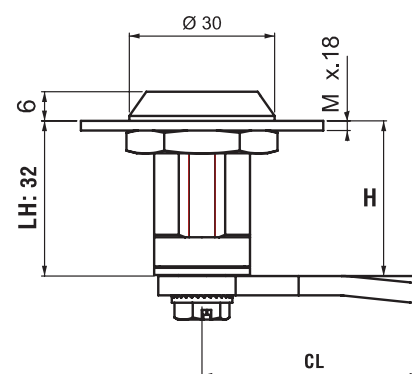


1



Standard
Cut Out




:3




Attention

Special
Cut Out

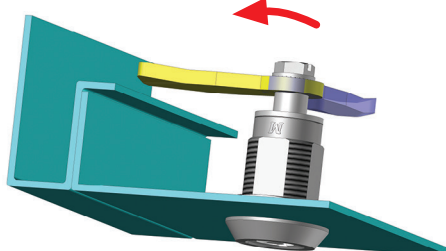

Unlock position

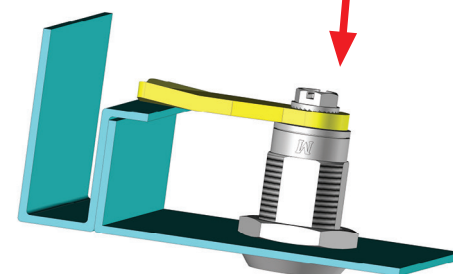




The first 90° of key rotation turns the cam to locking position






Lock position

Further key rotation 180° applies compression

DRIVERS

3 mm Double bit		5 mm Double bit		Railway		8 mm Square		2X4 mm Slot	
DD		DD		DD		DD		DD	
13		15		88		28		42	

7 mm Triangular		8 mm Triangular	
DD		DD	
37		38	

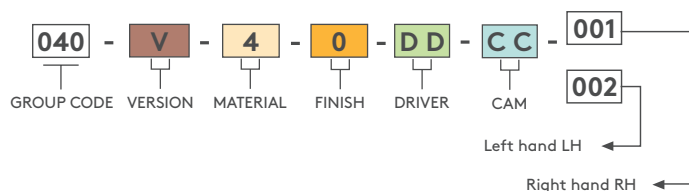PRODUCT CODE

For cams please check page: 148

For keys please check pages: 162 - 163