



**MUNSCH**  
*Plastic Pumps for Aggressive Media*



## Chemical pumps with mechanical seal

Munsch Standardized Pump CS  
Munsch Close-Coupled Pump CS-B  
Available in PP / PVDF / PFA

# NON-METALLIC PUMPS FOR THE CHEMICAL INDUSTRY – FROM THE SPECIALIST



**MUNISCH** is the specialist for non-metallic pumps. First and reliable solutions – planned through to the minute detail – make us a much sought-after partner to the process and chemical industries.

**Design**  
Our engineers develop and optimise pumps for your specific needs. Chief among our objective is to develop high-efficiency pumps providing maximum operating reliability. With their numerically optimized hydraulic design, MUNISCH pumps make a contribution to energy efficiency and plant productivity.

**Manufacture**  
We manufacture all plastic components in-house. Bought-in cast iron and ceramic components are standardised and invented in large volumes. Thanks to our high level of vertical integration we are independent of external manufacture and can respond fast and flexibly to customer needs.

## Assembly

Our quality testing and documentation procedures ensure product traceability through all stages of production. Our assembly team assembles the pumps using the I-C test methods and performs the tests/quality inspections at defined hold points on the basis of a rigorous test/inspection schedule.

## Testing

No pump leaves our production plant without having undergone a thorough test on our test bench.



## MUNSCH STANDARDIZED PUMP CS MUNSCH CLOSE-COUPLED PUMP CS-B

**A new pump generation for demanding applications in the chemical industry.**

With its CS and CS-B series, MUNSCH places a new energy-efficient generation of non-metallic centrifugal pumps onto the market. Manufactured from high-performance engineered plastics, the pumps are equipped with the latest generation of metal-free mechanical seals.

The robust design of MUNSCH mechanical seals is a guarantee for long service lives even in high-temperature-service or when pumping fluids with high solids loads. Together with the magnetically coupled pumps of the CM / CM-B series, MUNSCH offers you now a complete pump range for virtually all your pumping needs..

### Applications

The CS Series chemical centrifugal pumps with shaft seal are the solution of choice for corrosive and abrasive service conditions and whenever it comes to pumping fluids posing a health and environmental hazard. This CS pump series has been specifically developed for applications in which the use of magnetically coupled pumps is not advisable or undesirable because of the tough service environment.



**Use in explosion hazard zones**  
The CS and CS-B Series pumps meet the requirements of EU Directive 2014/34/EU for use in explosion hazard zones.

**Use in explosion hazard zones**  
The CS and CS-B Series pumps meet the requirements of EU Directive 2014/34/EU for use in explosion hazard zones.

## FLEXIBLE ALL-ROUND TALENT



### Types of construction

The CS Series standardized pumps are designed with fitting dimensions to EN 22858, ISO 2858 and ISO 5199. For the CS-B Series close-coupled pumps, this applies only to the flange connections.

### Ease of assembly

All components can be assembled without the need for special tools, adjustment or alignment of the mechanical seal is not required.

### Safety – in any direction

The impeller is positively locked to the pump shaft. MUNSC pumps are unaffected by reverse rotation (e.g. during the rotation direction test).

### High-performance shaft seals

The CS/CS-B series can be supplied with either single-acting or double-acting metal-free mechanical seals. Ceramic components and a variety of flushing options make the pumps suitable for applications involving high solids loads.

### Materials

All liquid-contacted pump components are fabricated from thick-walled PP and PVDF or universally chemical-resistant PFA plastics. The ceramic components of the mechanical seal combined with the secondary static seals manufactured from fluoroplastics make the pump quasi-universally resistant.

### Operational flexibility

Drain connections can be retrofitted at any time; the drain bore is already in place.  
**Casing with high wear reserve**  
Volume casing with wall thicknesses of >10 mm

### Tolerant to solids


A solids deflector effectively keeps solids away from the shaft passage.

### Exact operating points

Steep pump characteristics allow exact adjustment of the desired operating point.

### Thick-walled volute casing

The pump casing must accommodate pump pressures of up to 16 bar. The one-piece, thick-walled and self-supporting volute design together with the positive-fit metal casing armour offer maximum stability and reserves for high pressures and temperatures of up to 180 °C. The thick-walled volute also means added safety when the pump operates under temporary vacuum conditions.

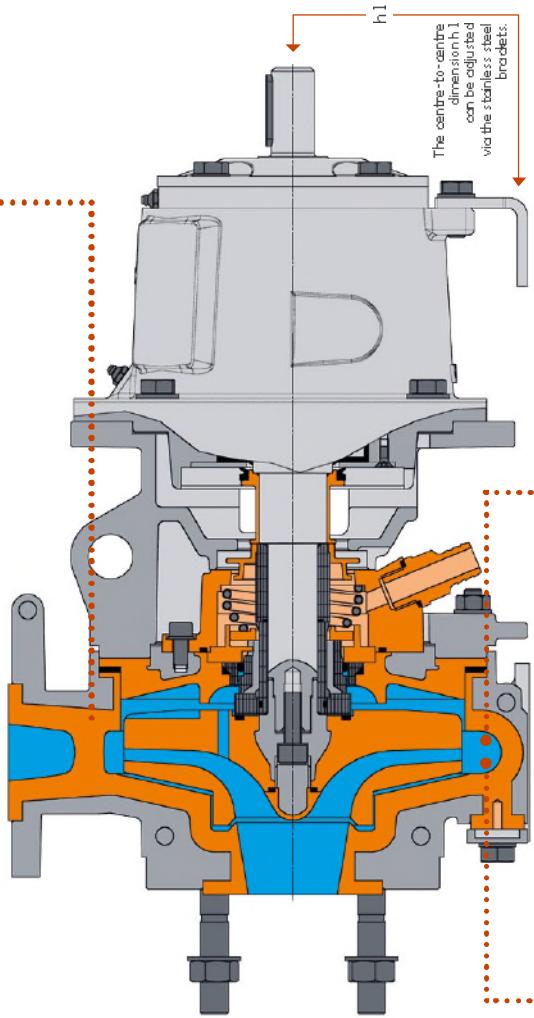

### Temperature measurement – directly in the product path

A temperature sensor (PT 100) installed in the drain bore provides direct measurement of the product temperature.



### Casing drain – retrofits possible

Residual liquid collecting at the low point of the casing can be drained via a casing drain. Retrofitting the pump with a casing drain is possible at all times.



### Performance data:

Pump capacity [lQ]:	up to 200 m³/h
Total differential head [H]:	up to 90 m
Operating temperature:	-20 up to 180 °C
Solids content:	up to 5 Vol-%
Particle size:	up to 5 mm
Discharge nozzle:	DN 125 up to DN 35
Motor rating:	CS up to 30 kW CS-B up to 18.5 kW

If your MUNSC pump has to keep pace with your capacity extension, switching to the next larger motor is no problem. The pump is mounted to the base plate via rigid stainless steel brackets.

Packing pieces between the pump and base plate are not required.



Energy-saving and gentle  
to pump materials

Impellers with high efficiencies and low  
NPSH requirements help save energy and  
minimise pump wear, even in challenging  
service environments.

## THE IMPELLER – OPTIMIZED FOR YOUR PUMPING NEEDS

### Numerically optimized hydraulics

The fluid dynamics of MUNSCH pumps are calculated, visualized and optimized using the latest numerical techniques (Computational Fluid Dynamics). The result is a hydraulic design with a virtually ideal flow profile. This means:

- Higher pump capacity at unchanged differential head
- Lower energy costs
- Improved suction behaviour through low NPSH requirements
- Minimized wear in abrasive service environments
- Reduced running noise

### Reduced lifecycle costs

The numerically optimized hydraulic design is a key factor in minimising the lifecycle costs of MUNSCH pumps. Capital and maintenance costs are reduced through the selection of the best suited hydraulic design and optimum motor sizes. Smaller cable cross-sections and lower-rated motor breakers keep down installation costs. The high pump efficiencies directly translate into energy savings.

### Impeller types

MUNSCH has the right impeller design for your specific pumping application. Wear, suction behaviour and efficiency are key factors determining the choice of the impeller. The right combination of impeller (hydraulics), material and shaft seal is all-decisive for a successful pump design and long service lives. MUNSCH pumps are available with closed, semi-open and vortex impellers.

### Solids-laden fluids


A solids deflector in the pump casing redirect solids away from the mechanical seal and back to the flow path of the process fluid.

### Impeller and pump shaft – reverse rotation-safety

The impeller is positively locked to the pump shaft for reverse rotation protection (e.g. during the rotation direction test).

### Pump characteristic

MUNSCH chemical pumps feature a steep performance characteristic. This means that the pumps can be exactly adjusted to the operating point.

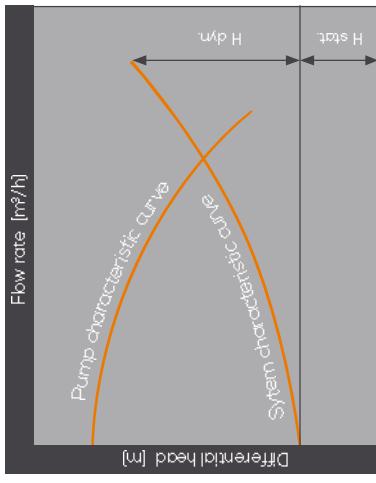

Visualised pressure distribution  
in the impeller and the volute casing

## THE MECHANICAL SEAL

The pump is equipped with the latest generation of mechanical seals.



- One mechanical seal size fits all pump sizes

- Many interchangeable components
- Ease of mounting without the need for adjustment or alignment
- Ease of conversion from a single to a double mechanical seal
- Optimum circulation of the buffer / barrier fluid
- Sense-of-rotation independent

### Corrosion resistance

MUNSCH mechanical seals do not have any metal components. The rotating and stationary seal rings as well as the shaft sleeve are fabricated from SiC ceramics, the secondary seals from fluoroplastics. The spring comes with a fluoroplastics coating. All in all, a material selection that leaves no chance for corrosion!

### Maintenance & handling

In the design of the pump components, special emphasis has been placed on positive identification, availability and ease of assembly. Adjustment or alignment of the mechanical seal is not needed.

## DOUBLE MECHANICAL SEAL – THE SAFE SOLUTION

Double mechanical seals consist of two tandem-mounted single mechanical seals. They are supplied with buffer/barrier fluid from an external source via two connections in the seal casing.

### A convenient kit

The product-side mechanical seal is identical in design with the REA-FS single mechanical seal. To seal the pump interior against the atmosphere, a second mechanical seal is provided at the atmosphere side (tandem arrangement).



### Application

The double mechanical seal is employed whenever there is a risk of solids deposition or product crystallization, in service conditions, posing a health or environmental hazard, when the process fluid is pumped near its boiling point or dry running would jeopardize proper lubrication of a single mechanical seal. The MUNSCH REA-FS/D double mechanical seal can be operated with barrier fluid in the once-through mode, with a closed-loop pressurized barrier fluid system or a quench system.


### Flexibility

Conversion from a single to a double mechanical seal or retrofitting a flushing arrangement requires only a few components and a few simple steps.


### Robust and long-lived

Crucial components of MUNSCH mechanical seals such as the shaft sleeve and the rotating seal ring are constructed from silicon carbide and positively locked to the shaft. Optimum material selection coupled with a perfect design guarantee long seal service lives.

## Configuration of the MUNSCH-REA-FS single mechanical seal

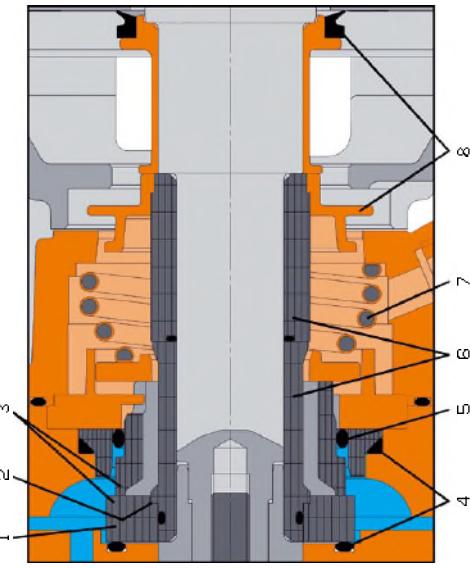

## MUNSCH-REA-FS/D double mechanical seal

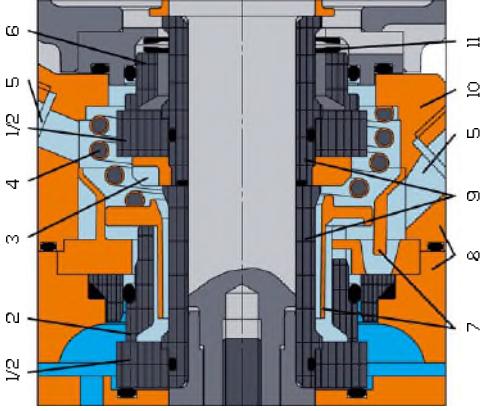


1. Product- and atmosphere-side rotating seal rings are of identical design and interchangeable.
2. Rotating and stationary seal rings are fabricated from high-performance silicon carbide.
3. A pounding ring circulates buffer/barrier fluid between the seal faces and an external seal support system.
4. The product-side spring is protected by a fluoroplastics coating and located outside the path of the fluid pumped. The atmosphere-side spring is located outside the path of the barrier fluid.
5. The locations of the flushing connections are fixed.
6. The atmosphere-side stationary seal ring is made from carbon.
7. A baffle system provides optimum distribution of the barrier fluid.
8. Seal housing and seal cover.
9. The silicon carbide shaft sleeves are insensitive to solids, crystals and slurries.
10. Stationless steel seal covers are available as an option.
11. The atmosphere-side spring is made of stainless steel.

# CHOOSING THE RIGHT FLUSHING OPTION – YOUR PUMP'S LIFE INSURANCE

One mechanical seal is not just like another. Whoever wants to maximise service lives and maintenance intervals is well advised to study the details of the sealing concept. Mechanical seal flushing – whether for cleaning and maintenance purposes or for ensuring reliable liquid supply to the seal – is rarely costly, but always worth a thought. Often the service life of the mechanical seal can be significantly extended at little cost.


When it comes to mechanical seal variants, MUNSCH offers maximum flexibility ex works. A universal seal cover fitting all single and double mechanical seals allows the pump to be adapted to change service conditions at any time – with only a small number of additional components and a minimum of time expenditure. Our service technicians will be pleased to advise you for your specific application.

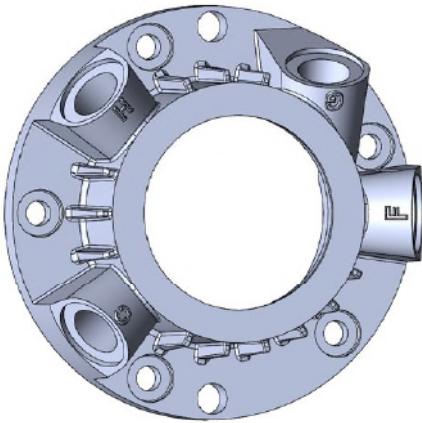

## Continuous flushing

It is general knowledge that extreme solids loads of the pumped fluid or fluids having a sticking tendency are the main causes of mechanical seal failure. Nevertheless, reliable operation of a single mechanical seal is possible under such conditions. Using a clean flushing fluid supplied from an external source, solids and slurry are continuously redirected away from the sensitive areas of the seal faces. Flushing can be continued after pump shutdown to keep the seal area clean and fit for the next start.


- Long service lives even in extreme service environments  
(very high solids loads, sticky fluids)
- Dilution of process leakage
- Clean flushing fluid from an external source required  
(approx. 0.8 l/min)

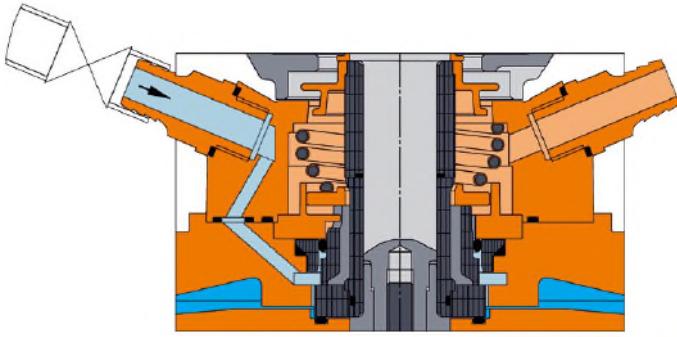

## Shutdown flushing

Residual product remaining in the pump and seal chamber after pump shutdown can foul or block the mechanical seal, resulting in accelerated wear or seal damage on the next startup. Shutdown flushing is a simple method to counteract such undesirable effects. For efficient cleaning of the mechanical seal after pump shutdown, the hydraulic section of the pump is flushed with a clean fluid for several minutes via a hose or flanged connection.

- Efficient cleaning – for a longer life of the mechanical seal
- Easy to implement
- No continuous flush needed

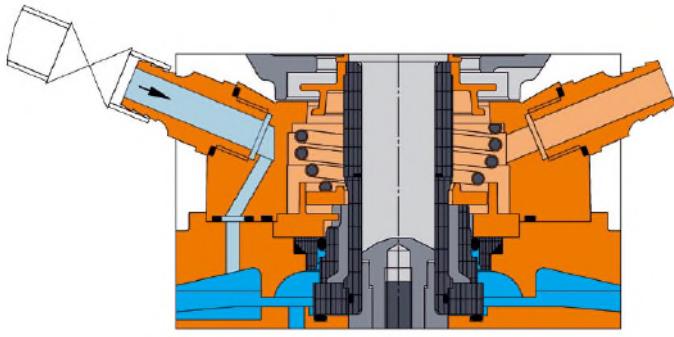

# DOUBLE MECHANICAL SEAL WITH QUENCH TANK

## Unpressurised double mechanical seal operating mode with quench fluid

# DOUBLE MECHANICAL SEAL WITH A CLOSED-LOOP PRESSURIZED BARRIER FLUID SYSTEM

## Pressurized double mechanical seal operating mode with a closed-loop barrier fluid system

### Operation in the quench mode

Operation with a quench fluid is a simple and cost-effective sealing solution for many applications. The following criteria should be taken into account in the design and operation of the quench system:

- The temperature of the return flow from the seal chamber to the quench tank should not exceed 60°C.
- The supply/return temperature difference should not exceed 25K.
- During pump operation, the liquid level in the quench tank should be checked at regular intervals. If the liquid level in the quench tank changes abruptly, the mechanical seal must be checked.
- The quench fluid should be periodically checked for impurities introduced through the pumped fluid and be replaced in the case of excessive impurity concentrations.

### Operating principle

The temperature differential between the quench tank inlet and outlet induces a natural flow of the quench fluid according to the thermosyphon principle. The unpressurized quench fluid circulates continuously between the quench tank and the shaft seal chamber, cooling and lubricating the mechanical seals in the process.

### Requirements for the quench fluid

Criteria to be taken into account in the selection of the quench fluid include:

- Boiling point: High-boiling fluids should be preferred as they have to carry off the heat generated in the mechanical seal.
- Lubricating properties: The quench fluid should have good lubricity to reduce friction between the stationary and rotating seal rings.
- Viscosity: The kinematic viscosity of the quench fluid must not exceed 5 mm<sup>2</sup>/s (cSt).

### Application

This pressurized double mechanical seal support system is employed when:

- process fluids posing a health or environmental hazard have to be reliably contained to preclude process leakage to the atmosphere.
- dry running of the pump cannot be ruled out and reliable barrier fluid supply to the mechanical seal must be ensured at all times, or
- the process fluid is pumped near its boiling point, or high solids loads of the pumped fluid would jeopardize proper lubrication of a single mechanical seal
- continuous flushing with clean water is not feasible

### Operating principle



The temperature differential between the feed and return lines induces a natural circulation of the barrier fluid according to the thermosyphon principle. As a result, the barrier fluid circulates continuously between the thermosyphon vessel and the pump seal chamber where it lubricates and cools both the product-side and the atmosphere-side mechanical seal. A pumping ring and baffle system inside the mechanical seal support barrier fluid circulation, thus ensuring proper heat dissipation. The barrier fluid pressure is maintained by pressurising the thermosyphon vessel. Cooling of the barrier fluid is provided by a cooling coil installed in the thermosyphon vessel.

### Monitoring

For the efficient and reliable operation of double mechanical seals with a pressurized closed-loop barrier fluid system, the following criteria must be satisfied at all times:

- a sufficient barrier fluid supply,
- a sufficient pressure in the barrier fluid system, and
- the barrier fluid must not exceed the allowable temperature.

Monitoring of these parameters – whether automated or manual – is the responsibility of the plant operator.

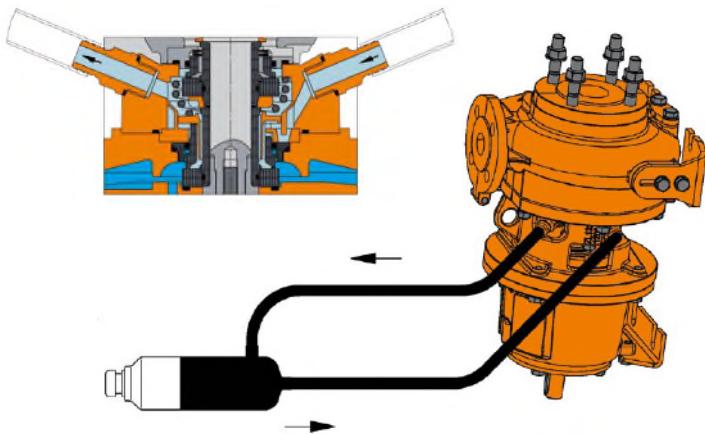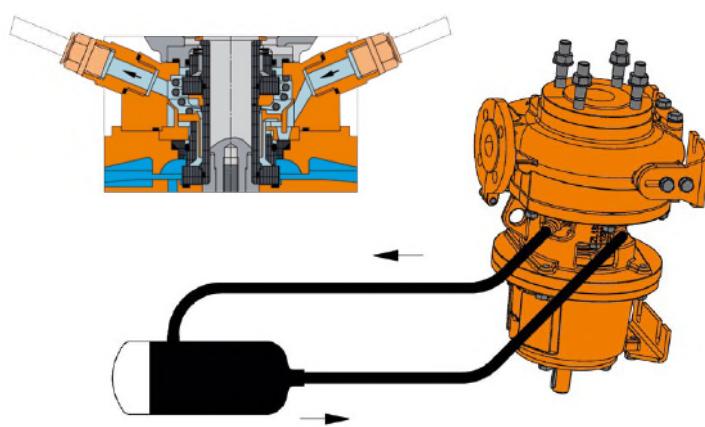

Pump with quench tank

Pump with thermosyphon vessel

# DOUBLE MECHANICAL SEAL WITH ONCE-THROUGH PRESSURIZED BARRIER FLUID SYSTEM

## TECHNICAL DATA

### Double mechanical seal operated with pressurised freshwater

#### Application

Double mechanical seals operated with a once-through barrier fluid system are employed when:

- dry running of the pump cannot be ruled out and reliable barrier fluid supply to the mechanical seal must be ensured at all times, or
- the process fluid is pumped near its boiling point, or
- high solids loads of the pumped fluid would jeopardize proper lubrication of a single mechanical seal.

#### Operating principle


Depending on the temperature of the pumped fluid, the double mechanical seal is supplied with clean barrier fluid at a rate of 0.25 to 1.0 l/min via a connection in the seal cover. The barrier fluid is maintained at a higher pressure than the seal chamber pressure, thus precluding process leakage to the atmosphere. A baffle system provided inside the seal optimises flow distribution to ensure efficient heat removal before the barrier fluid discharges at the other end of the seal cover.

#### Monitoring

For efficient and reliable performance of double mechanical seals operated with barrier fluid in the once-through mode, the following criteria must be satisfied at all times:

- sufficient supply of barrier fluid,
- sufficiently high pressure of the barrier fluid, and
- the barrier fluid must not exceed the allowable temperature.

Monitoring of these crucial operating parameters – whether automated or manually – is the responsibility of the plant operator.





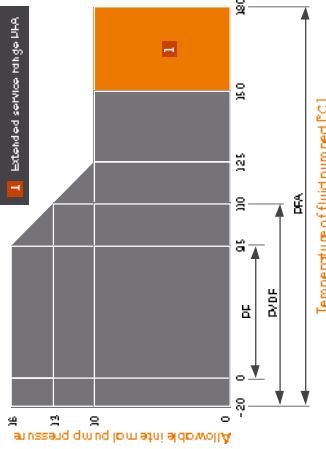


**Maximum allowable service pressures and temperatures**

- Viscosity: The kinematic viscosity should not exceed 5 mm<sup>2</sup>/s.
- Temperature: The temperature of the pumped fluid should not exceed 125 °C.

- Temperature: The temperature of the pumped fluid should not exceed 125 °C.

**Performance range chart 60 Hz, 1750 l/min**

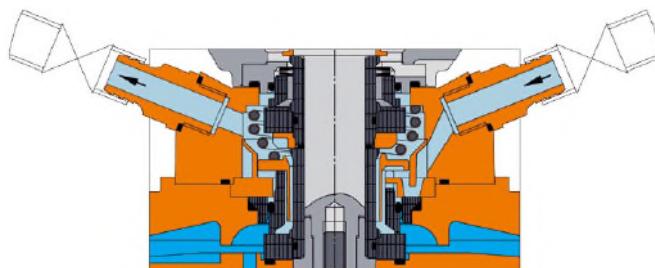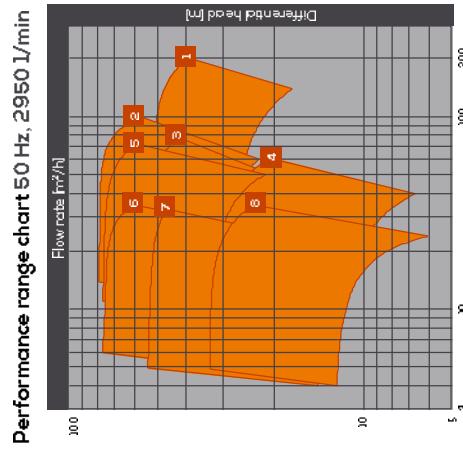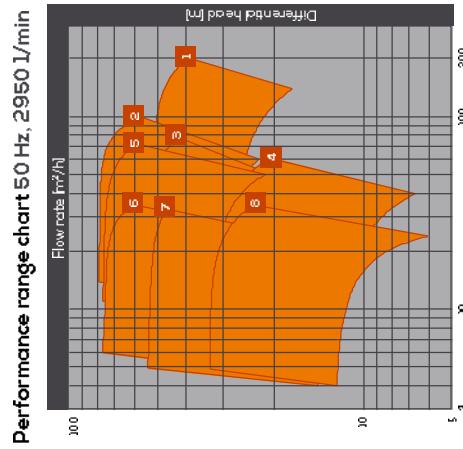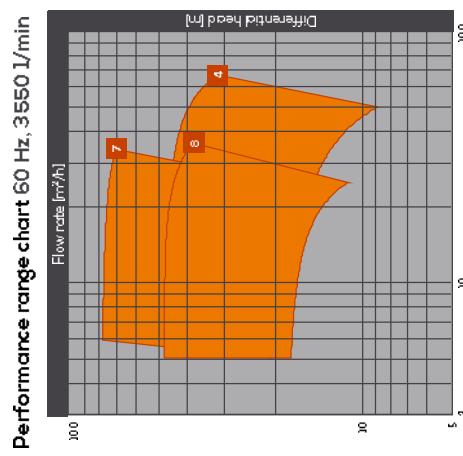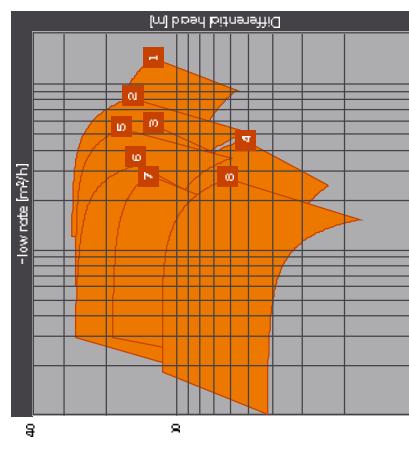

Operation with barrier fluid in the once-through mode


1 80-65-160-A 2 80-50-200-A 3 65-50-160-A 4 65-50-125-A 5 65-40-200-A 6 50-32-160-A 7 50-32-125-A

## SECTIONS AND INTERCHANGEABILITY

## LIST OF INTERCHANGEABLE COMPONENTS FOR CS/CS-B


Components with the same numeric code or colour are identical.

Pump size CS	40-25-125	50-32-125	65-50-125	40-25-160	50-32-160	65-50-160	50-32-200	65-40-200	80-50-200	80-65-260
Casing cover with armour plating	1	2	3	4	5	6	7	8	9	10
Intermediate bearing	11			12			13		12	
Casing cover	21			22			23		22	
Impeller	31	32	33	34	35	36	37	38	39	40
Bearing bracket unit	LIS-A-CSIn the standard with grease lubrication (without option) optional permanent grease or oil lubrication									
Single mechanical seal	MUNSCH-REA-FS									
Double mechanical seal	MUNSCH-REA-FS/D									

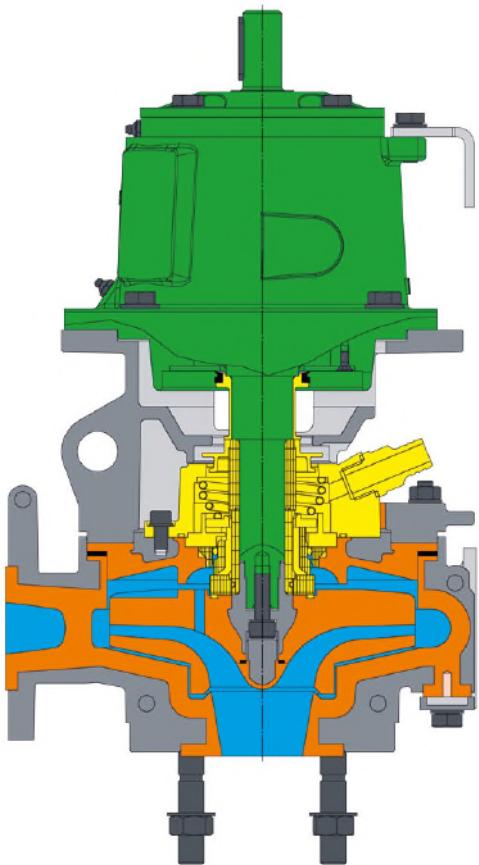

Single mechanical seal FS


Double mechanical seal FS/D

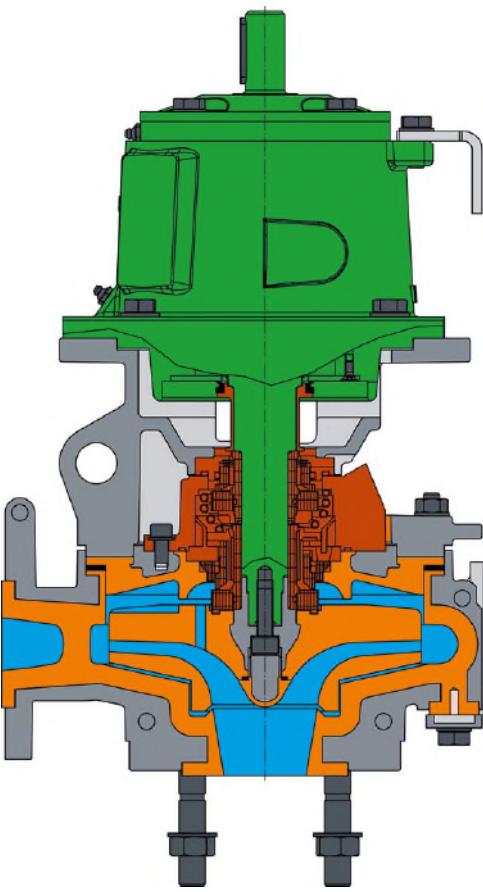


Interchangeable mechanical seal components  
MUNSCH-REA-FS/D

Components for mechanical seal conversion

- Article for MUNSCH-REA-FS only
- Article for MUNSCH-REA-FS/D only
- Interchangeable components MUNSCH-REA-FS and FS/D
- Interchangeable O-rings within the mechanical seals

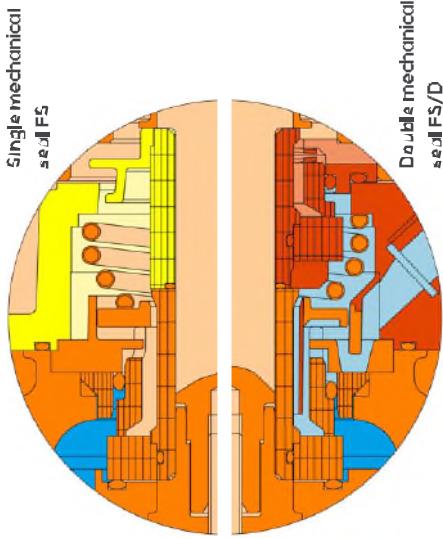

Single mechanical seal FS


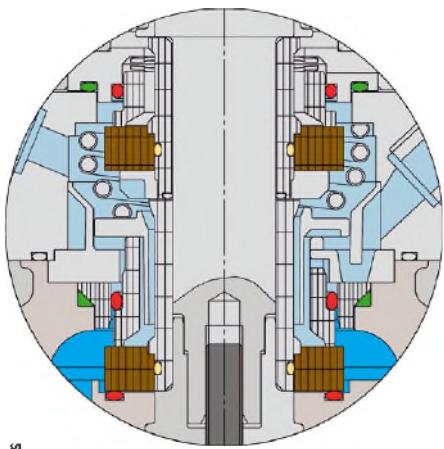


Double mechanical seal FS/D

- O-rings: 4122 / 41245 / 41274
- O-rings: 4123 / 4129
- O-rings: 41252 / 41261
- Rotating sealings: 472 / 4722

Interchangeable mechanical seal components  
MUNSCH-REA-FS/D

# ARRANGEMENT DRAWING FOR CS EQUIPPED WITH IEC MOTORS, FRAME SIZE B3

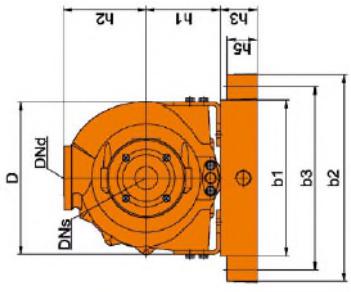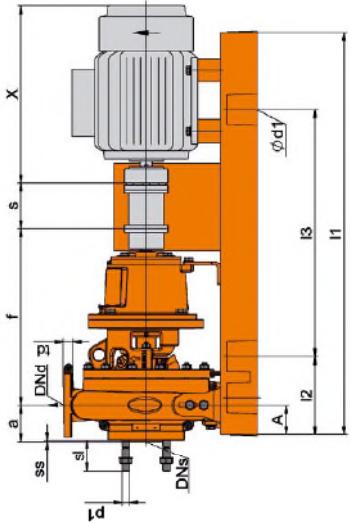

## Main pump dimensions

	a	f	h1*	h2	D	m1	m2	n1	n2	n3	w	s	S1	S2	b4	t4	ss	sl	sd	l	dl	sd	A
Pump size																							
40-25-125	80	385	112	140	280	100	70	240	190	100	285	100	14	15	50	16	3	70	24	50	60	2	60
40-25-160	80	385	132	160	315	100	70	240	190	100	285	100	14	15	50	16	3	70	24	50	60	2	60
50-32-125	80	385	112	140	280	100	70	240	190	100	285	100	14	15	50	18	3	70	24	50	60	2	60
50-32-160	80	385	132	160	315	100	70	240	190	100	285	100	14	15	50	18	3	70	24	50	60	2	60
50-32-200	80	385	160	180	335	100	70	240	190	100	285	100	14	15	50	20	3	70	24	50	60	3	60
65-50-125	80	385	112	140	280	100	70	240	190	100	285	100	14	15	50	20	3	70	24	50	60	3	60
65-50-160	80	385	132	160	315	100	70	240	190	100	285	100	14	15	50	20	3	70	24	50	60	3	60
65-50-200	100	385	160	180	335	100	70	240	190	100	285	100	14	15	50	20	3	70	24	50	60	3	60
80-65-160	100	385	160	200	370	100	70	265	220	110	285	100	14	15	50	20	3	70	24	50	70	3	60
80-65-200	100	385	160	200	355	100	70	265	212	110	285	100	14	15	50	20	3	70	24	50	70	3	60
80-80-200	100	385	160	200	355	100	70	265	212	110	285	100	14	15	50	20	3	70	24	50	70	3	60

Available sizes of cast iron and steel base plates to DIN 23 661 for CS

Motor size	90S	90L	100L	112L	112M	122S	122M	132M	140L	160L	180M	180L	200L	200L	225S	225M
40-25-125	90	90	100	112	112	132	132	132	160	160	180	180	200	200	225	225
40-25-160	2	3	3	4	4	5	5	5	5	5	5	5	6	6	7	7
50-32-125	2	3	3	3	4	4	4	4	5	5	5	5	6	6	7	7
50-32-160	2	3	3	3	4	4	4	4	5	5	5	5	6	6	7	7
50-32-200	2	3	3	3	4	4	4	4	5	5	5	5	6	6	7	7
65-50-125	2	3	3	3	4	4	4	4	5	5	5	5	6	6	7	7
65-50-160	2	3	3	3	4	4	4	4	5	5	5	5	6	6	7	7
65-50-200	3	3	3	3	4	4	4	4	5	5	5	5	6	6	7	7
80-65-160	3	3	3	3	4	4	4	4	5	5	5	5	6	6	7	7
80-65-200	3	3	3	3	4	4	4	4	5	5	5	5	6	6	7	7

hl dimensions of pump and motor combinations marked in red are identical

## Flange dimensions

### SUCTION FLANGE

	L1N	k1	z1	p1	k2	z2	p2	kd	z1	p1	Dnd	k1	z1	p1	L1N	J1S		
Pump size	DNs	ks	z1	p1	ks	z2	p2	kd	z1	p1	Dnd	ks	z1	p1	kd	p2	kd	
40-25-125	40	110	4	M16	93/6	4	M12	1/2"	105	4	M16	25	4	M12	1/2"	90	4	M16
40-25-160	40	110	4	M16	93/6	4	M12	1/2"	105	4	M16	25	4	M12	1/2"	100	4	M16
50-32-125	50	125	4	M16	120/7	4	M16	5/8"	120	4	M16	32	100	4	118	83/9	4	V12
50-32-160	50	125	4	M16	120/7	4	M16	5/8"	120	4	M16	32	100	4	118	83/9	4	V12
50-32-200	50	125	4	M16	120/7	4	M16	5/8"	120	4	V16	32	100	4	118	83/9	4	V12
65-50-125	65	145	4	M16	139/7	4	M16	5/8"	140	4	V16	50	125	4	118	120/7	4	V16
65-50-160	65	145	4	M16	139/7	4	M16	5/8"	140	4	V16	50	125	4	118	120/7	4	V16
65-50-200	65	145	4	M16	139/7	4	M16	5/8"	140	4	V16	40	110	4	118	93/7	4	V16
80-65-160	80	160	8	M16	152/4	4	M16	5/8"	150	8	V16	65	145	4	118	139/7	4	V16
80-65-200	80	160	8	M16	152/4	4	M16	5/8"	150	8	V16	65	145	4	118	139/7	4	V16

For motor dimensions for CS, see page 24

# MOTOR: EU PROPRIETARY MAKE MAIN DIMENSIONS

## Main pump dimensions

Pump size	a	b1'	b2	c	d	e	f	g	h1'	i	j	k	m1	m2	n1	n2	o1	o2	p1	q	r	s1	t1	ss	sl	A
40-25-125	80	112	140	280	100	70	240	190	14	16	3	70	60													
40-25-160	80	132	160	315	100	70	240	190	14	16	3	70	60													
50-32-125	80	112	140	280	100	70	240	190	14	18	3	70	60													
50-32-160	80	132	160	315	100	70	240	190	14	18	3	70	60													
50-32-200	80	160	180	335	100	70	240	190	14	18	3	70	60													
65-50-125	80	112	140	280	100	70	240	190	14	20	3	70	60													
65-50-160	80	132	160	315	100	70	240	190	14	20	3	70	60													
65-50-200	100	160	180	355	100	70	285	212	14	18	3	70	60													
80-65-160	100	160	200	370	100	70	285	212	14	20	3	70	60													
80-50-200	100	160	200	355	100	70	285	212	14	20	3	70	60													

## h1 dimension of the unit

With some pumps, a larger h1 dimension is needed as the radius of the motor flange is larger than the h1 dimension of the pump.



Pump size	h1-measure pump		h1-measure aggregate		Motor size
	100	112	132	160	
40-25-125	112	132	132	160	160
50-32-125	112	132	132	160	160
65-50-125	112	132	132	160	160
40-25-160	132	132	132	160	160
50-32-160	132	132	132	160	160
50-32-200	160	160	160	160	160
65-40-200	160	160	160	160	160
80-65-160	160	160	160	160	160
80-50-200	160	160	160	160	160

## Available base plate sizes for CS-B

Motor size	71	80	90S	90L	100L	112M	132S	132M	160M	160L
	Pump size	2	2	2	2	2	2	2	2	2
40-25-125	2	2	2	2	2	2	2	2	2	3
40-25-160	2	2	2	2	2	2	2	2	2	3
50-32-125	2	2	2	2	2	2	2	2	2	3
50-32-160	2	2	2	2	2	2	2	2	2	3
50-32-200	2	2	2	2	2	2	2	2	2	3
65-50-125	2	2	2	2	2	2	2	2	2	3
65-50-160	2	2	2	2	2	2	2	2	2	3
65-50-200	3	3	3	3	3	3	3	3	3	3
80-50-200	3	3	3	3	3	3	3	3	3	3


## Base plate dimensions as per EN 23661

3-size plate size	b1	b2	b3	c1	c2	c3	c4	c5	c6	c7
	2	270	360	320	800	130	540	65	55	19/N16
3	300	390	350	900	150	600	65	55	19/N16	

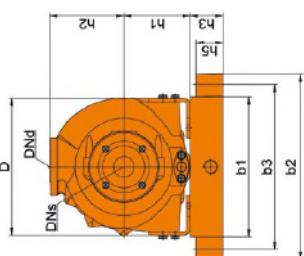

## Motor dimensions

Motor size	Engine design IMB 35			Pump		
	v1	v2	v3	v4	v5	v6
100L	63	140	160	50	186	90
112M	70	140	190	50	186	90
132S	84	140	216	50	246	108
132M	88	173	216	50	246	108
160M	108	210	254	50	275	108
160L	108	254	254	50	275	108

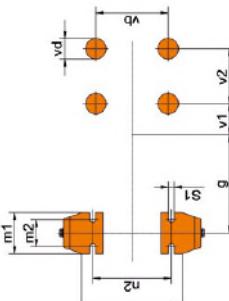

## Flange dimensions

DN	SUCTION FLANGE				PRESSURE FLANGE				ANSI
	DNs	k1	z1	p1	DN	k1	z1	p2	
40-25-125	40	110	4	M16	48.6	4	M16	1/2"	
40-25-160	40	110	4	M16	93.6	4	M16	1/2"	
50-32-125	50	125	4	M16	120.7	4	M16	5/8"	
50-32-160	50	125	4	M16	120.7	4	M16	5/8"	
50-32-200	50	125	4	M16	120.7	4	M16	5/8"	
65-50-125	65	145	4	M16	139.7	4	M16	5/8"	
65-50-160	65	145	4	M16	139.7	4	M16	5/8"	
65-50-200	65	145	4	M16	152.4	4	M16	5/8"	
80-50-200	80	160	8	M16	152.4	4	M16	5/8"	

For motor dimensions for CS-B see page 25

# MOTOR: EU PROPRIETARY MAKE MAIN DIMENSIONS FOR CS

# MOTOR: EU PROPRIETARY MAKE MAIN DIMENSIONS FOR CS-B

**Motor frame size IM B3, type of protection IP55**

Rotational speed 450 l/min						
Motor size	Power [kW]	ØD [mm]	E [mm]	X [mm]	Power [kW]	ØD [mm]
100L	22	28	60	389	100L	3
100L	3	28	60	389	102M	4
112M	4	28	60	382	128S	5,5
128S	5,5	38	80	382	128S	7,5
128M	7,5	38	80	457	160M	11
160M	11	42	110	457	160M	15
160L	15	42	110	594	160L	18,5
180M	18,5	48	110	688	180M	22
180L	22	48	110	698	200L	30
200L	30	58	110	746		

**Motor frame size IM B35, type of protection IP55**

Rotational speed 450 l/min						
Motor size	Power [kW]	ØD [mm]	E [mm]	X [mm]	Power [kW]	ØD [mm]
100L	2,2	100L	3	28	60	389
100L	3	100L	4	28	60	389
112M	4	100L	4	28	60	382
128S	5,5	128S	5,5	38	80	382
128M	7,5	160M	7,5	42	110	457
160M	11	160M	11	42	110	594
160L	15	160L	18,5	42	110	594
180M	18,5	180M	22	48	110	688
180L	22	180L	30	58	110	746
200L	30	200L	46	110		

**Motor frame size IM B3, type of protection EEx d II T3**

Rotational speed 2950 l/min						
Motor size	Power [kW]	ØD [mm]	E [mm]	X [mm]	Power [kW]	ØD [mm]
100L	2	28	60	372	100L	2,5
100L	2,5	28	60	372	112M	3,6
112M	3,6	100L	2,5	28	128S	5
128S	5	112M	3,3	28	128M	6,8
128M	6,8	160M	4,5	38	160M	10
128S	5	128S	4,5	38	160L	13,5
128M	6,8	160M	7,5	42	160L	13,5
160M	10	42	110	588	160M	10
160L	13,5	160L	12,5	42	160L	15
180M	15	48	110	715	180M	15
180L	17,5	48	110	715	200L	20
200L	24	58	110	772	200L	24
225S	30	60	140	834	225M	28



**Motor frame size IM B35, type of protection EEx d II T3**

Rotational speed 450 l/min						
Motor size	Power [kW]	ØD [mm]	E [mm]	X [mm]	Power [kW]	ØD [mm]
100L	2,2	100L	3	250	100L	3
100L	3	28	60	482	112M	4
112M	4	28	60	485	128S	5,5
128S	5,5	38	80	574	128M	7,5
128M	7,5	38	80	574	160M	11
160M	11	42	110	736	160M	15
160L	15	42	110	736	160L	18,5
180M	18,5	48	110	822	180M	22
180L	22	48	110	822	200L	30
200L	30	58	110	884		

**Motor frame size IM B35, type of protection EEx de T4**

Rotational speed 2950 l/min						
Motor size	Power [kW]	ØD [mm]	E [mm]	X [mm]	Power [kW]	ØD [mm]
100L	2,2	100L	3	250	100L	3
100L	3	28	60	482	112M	4
112M	4	28	60	485	128S	5,5
128S	5,5	38	80	574	128M	7,5
128M	7,5	38	80	574	160M	11
160M	11	42	110	736	160M	15
160L	15	42	110	736	160L	18,5
180M	18,5	48	110	822	180M	22
180L	22	48	110	822	200L	30
200L	30	58	110	884		

## MUNSCH PRODUCT RANGE

	Standardized chemical pump <b>NPC Mammut</b> with metal armour	
	Standardized chemical pump <b>NP</b> with solid plastic casing	
	Close-coupled chemical pump <b>NP-B</b> with solid plastic casing	
	Vertical chemical pump <b>TNP-B</b> with plain bearing	
	Vertical cantilever pump <b>TPC-M</b> with plain bearing	
	Vertical chemical pump <b>TNP</b> with plain bearing	
	Vertical cantilever pump <b>TPC</b> with plain bearing	




**MUNSCH**  
Plastic Welding Technology

Did you know?

Munsch offers you a broad range of hand-held plastic extrusion welders with a full suite of accessories for container engineering, hydraulic engineering and landfill construction applications.

[munsch-kunststoff-schweißtechnik.de](http://munsch-kunststoff-schweißtechnik.de)

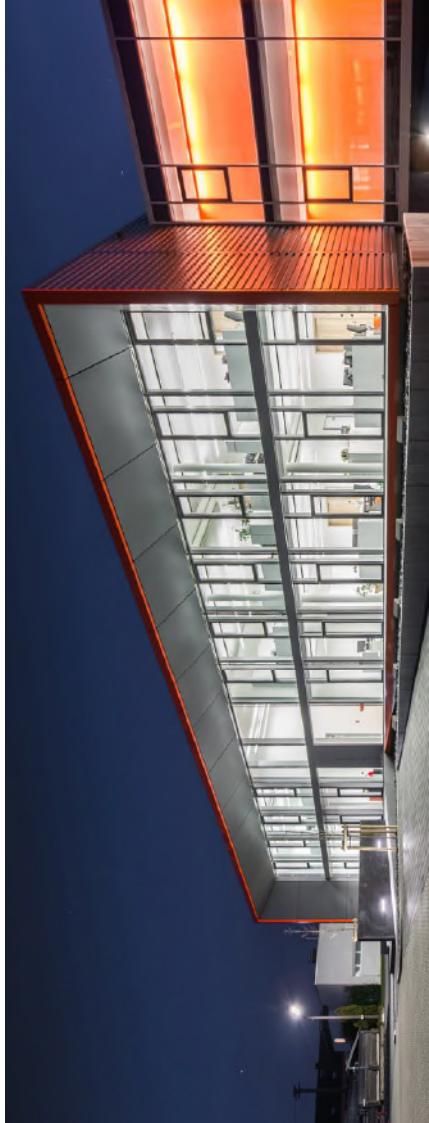



**MUNSCH Chemie Pumpen GmbH**

Im Staudchen · D-56235 Ransbach-Baumbach  
P.O. Box 142 · D-56221 Ransbach-Baumbach  
Germany

Phone: +49 (0) 2623-8 98-90  
Telefax: +49 (0) 2623-8 98-95  
Internet: [www.munsch.de](http://www.munsch.de)  
Email: [munsch@munsch.de](mailto:munsch@munsch.de)