



Engineering In Sealing World

Oil Seals

MATERIAL:
NBR, EPDM, NEOPRENE, SILICONE, PA, HNBR and FLUOROELASTOMER and etc. All compounds meet ASTM D2000 standard and special request is available.




Gaskets

* For Hydraulic and pneumatic pump material, any gasket function.
* **MATERIAL:** available for NBR, EPDM and NEOPRENE and etc.




O-Rings

International Standard: AS 568A, DIN3771, BS1806, ISO3601 FRENCH-R JAPANESE-JIS B2401-P.G.S.Vand all Metric size available.
Size Range: MIN C.S. 0.4MM and MAX O.D 1000MM.

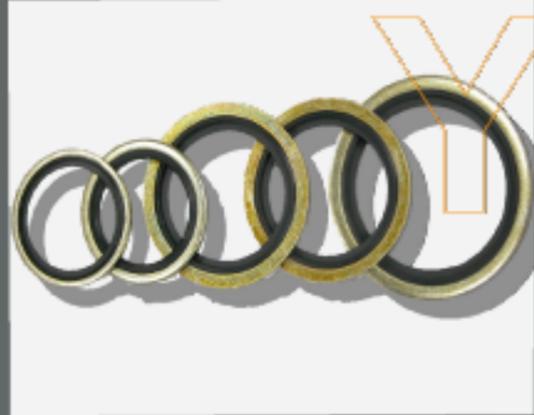

Bonded Seals

MATERIAL:
NBR and FLUOROCARBON with STAINLESS or CARBON STEEL with ZINC PLATED.

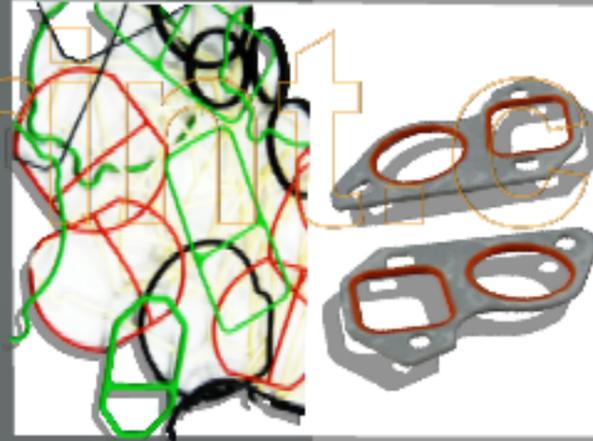

Grommet And Isolator

* Available for parts slit material. It is provides good vibration isolation for disturbing frequencies.
* **MATERIAL:** available for NBR, EPDM and NEOPRENE and etc.



Bearing Seals

MATERIAL:
NBR, PA, SILICONE and FLUOROCARBON with STAINLESS STEEL or CARBON STEEL.



Cylinder Head Gaskets

Major/minor engine overhaul packs, CAM bed gaskets, and all types of gaskets using metal and non-metal materials.



Material for fuel/ diesel resistance

Various fuel/diesel and color compound including:
NB6005FR, NB6009DFR
NB6502FR, NB6503FR (GREEN)
NB6504FR (RED), NB7001
NB7016FR, NB7017DFR

