


轴承 型号	外形尺寸				Mass重量			
	d	D	B	r(min)	(Kg) (参考) (refer)			
					ZrO2	Si3N4	PLASTIC	440c
683	7	2	0.1	0.00024	0.00013	0.00005	0.00032	
693	8	3	0.15	0.0005	0.00025	0.0001	0.00061	
603	9	3	0.15	0.0007	0.0004	0.0002	0.00087	
623	10	4	0.15	0.0013	0.0007	0.0003	0.00165	
633	13	5	0.15	0.0025	0.0014	0.0006	0.0034	
684	9	2.5	0.1	0.0005	0.0003	0.0001	0.0006	
694	11	4	0.15	0.0013	0.0007	0.0003	0.0017	
604	12	4	0.2	0.0017	0.0009	0.0004	0.0023	
624	13	5	0.2	0.0023	0.0013	0.0006	0.0030	
634	16	5	0.3	0.0040	0.0022	0.0010	0.0052	
685	11	3	0.15	0.0009	0.0005	0.0002	0.0012	
695	13	4	0.2	0.0019	0.0010	0.0005	0.0025	
605	14	5	0.2	0.0027	0.0015	0.0007	0.0035	
625	16	5	0.3	0.0038	0.0021	0.0010	0.0050	
635	19	6	0.3	0.0066	0.0036	0.0016	0.0086	
686	13	3.5	0.15	0.0015	0.0008	0.0004	0.0019	
696	15	5	0.2	0.0030	0.0016	0.0007	0.0039	
606	17	6	0.3	0.0046	0.0025	0.0011	0.0060	
626	19	6	0.3	0.0063	0.0034	0.0016	0.0086	
636	22	7	0.3	0.0108	0.0058	0.0027	0.0140	
687	14	3.5	0.15	0.0017	0.0009	0.0004	0.0022	
697	17	5	0.3	0.0040	0.0022	0.0010	0.0053	
607	19	6	0.3	0.0059	0.0032	0.0015	0.0077	
627	22	7	0.3	0.0098	0.0053	0.0024	0.0127	
637	26	9	0.3	0.0185	0.0100	0.0046	0.0240	
688	16	4	0.2	0.0025	0.0014	0.0006	0.0027	
698	19	6	0.3	0.0056	0.0030	0.0014	0.0072	
608	22	7	0.3	0.0093	0.0050	0.0023	0.012	
628	24	8	0.3	0.013	0.0072	0.0033	0.017	
638	28	9	0.3	0.022	0.012	0.0054	0.028	

轴承 型号	外形尺寸				Mass重量			
	d	D	B	r(min)	(Kg) (参考) (refer)			
					ZrO2	Si3N4	PLASTIC	440c
6200	30	9	0.6	0.025	0.013	0.006	0.032	
6300	35	11	0.6	0.040	0.022	0.010	0.052	
6801	21	5	0.3	0.005	0.0025	0.0012	0.006	
6901	24	6	0.3	0.008	0.0042	0.0019	0.01	
16001	28	7	0.3	0.015	0.0079	0.004	0.019	
6001	28	8	0.3	0.017	0.0092	0.004	0.019	
6201	32	10	0.6	0.028	0.015	0.007	0.037	
6301	37	12	1	0.046	0.025	0.004	0.022	
6802	24	5	0.3	0.005	0.0029	0.0013	0.007	
6902	28	7	0.3	0.012	0.0063	0.003	0.005	
16002	32	8	0.3	0.021	0.011	0.005	0.027	
6002	32	9	0.3	0.024	0.013	0.006	0.031	
6202	35	11	0.6	0.035	0.019	0.009	0.045	
6302	42	13	1	0.064	0.035	0.016	0.083	
6803	26	5	0.3	0.005	0.0029	0.0013	0.007	
6903	30	7	0.3	0.013	0.0071	0.0033	0.017	
16003	35	8	0.3	0.025	0.014	0.006	0.033	
6003	35	10	0.3	0.032	0.017	0.008	0.041	
6203	40	12	0.6	0.052	0.028	0.013	0.067	
6303	47	14	1	0.087	0.047	0.022	0.11	
6403	62	17	1.1	0.21	0.11	0.052	0.27	
6804	32	7	0.3	0.013	0.007	0.003	0.017	
6904	37	9	0.3	0.028	0.015	0.007	0.037	
16004	42	8	0.3	0.037	0.02	0.009	0.048	
6004	42	12	0.6	0.052	0.028	0.013	0.068	
6204	47	14	1	0.082	0.045	0.021	0.11	
6304	52	15	1.1	0.11	0.06	0.028	0.15	
6404	72	19	1.1	0.31	0.17	0.08	0.4	
6805	37	7	0.3	0.016	0.009	0.00	0.021	
6905	42	9	0.3	0.032	0.018	0.01	0.042	

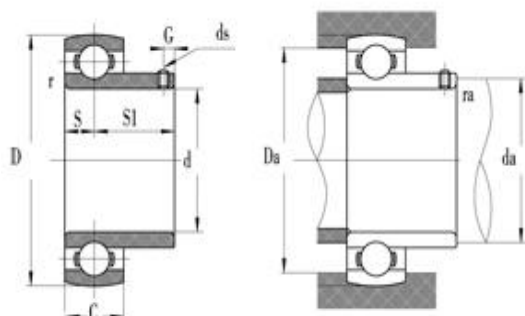

轴承代号	孔径(d)		外形尺寸(mm)							Mass重量 (Kg) (参考) (refer)			
	in	mm	D	B	C	S	S1	G	ds	ZrO2	Si3N4	PLASTIC	440c
SSUC201-8	1/2		47	31	17	12.7	18.3	5	1/4-28 M6P0.75	0.15	0.08	0.04	0.20
SSUC201		12								0.16	0.09	0.04	0.21
SSUC202-9	9/16												
SSUC202-10	5/8									0.15	0.08	0.03	0.19
SSUC202		15								0.15	0.08	0.03	0.19
SSUC203-11	11/16									0.14	0.07	0.03	0.18
SSUC203		17	47	31	17	12.7	18.3	5	1/4-28 M6P0.75	0.14	0.07	0.03	0.18
SSUC204-14	3/4									0.12	0.07	0.03	0.16
SSUC204		20								0.12	0.07	0.03	0.16
SSUC205-13										0.17	0.09	0.04	0.22
SSUC205-14	7/8									0.15	0.08	0.04	0.22
SSUC205-15	15/16									0.15	0.08	0.04	0.20
SSUC205-16	1		52	34.1	17	14.3	19.8	5	1/4-28 M6P0.75	0.15	0.08	0.03	0.19
SSUC205		25								0.15	0.08	0.03	0.19
SSUC206-17	1 1/16									0.25	0.14	0.06	0.33
SSUC206-18	1 1/8									0.24	0.13	0.06	0.31
SSUC206-19	1 3/16									0.25	0.13	0.06	0.32
SSUC206-20	1 1/4									0.24	0.13	0.06	0.31
SSUC206		30	62	38.1	19	15.9	22.2	5	1/4-28 M6P0.75	0.24	0.13	0.06	0.31
SSUC207-20	1 1/4									0.41	0.22	0.10	0.53
SSUC207-21	1 5/16									0.38	0.21	0.09	0.50
SSUC207-22	1 3/8									0.36	0.19	0.08	0.47
SSUC207-23	1 7/16									0.34	0.18	0.08	0.44
SSUC207		35								0.36	0.19	0.08	0.47
SSUC208-24	1 1/2		80	49.2	22	19	30.2	8	5/16-24 M8P1.0	0.51	0.27	0.12	0.66
SSUC208-25	1 9/16									0.48	0.26	0.11	0.63
SSUC208		40								0.47	0.25	0.11	0.61
SSUC209-26	1 5/8									0.60	0.32	0.14	0.78
SSUC209-27	1 11/16									0.57	0.30	0.13	0.74
SSUC209-28	1 3/4									0.54	0.29	0.13	0.70
SSUC209		45								0.52	0.28	0.12	0.68