


Hydrogen is now.

H-TEC SYSTEMS

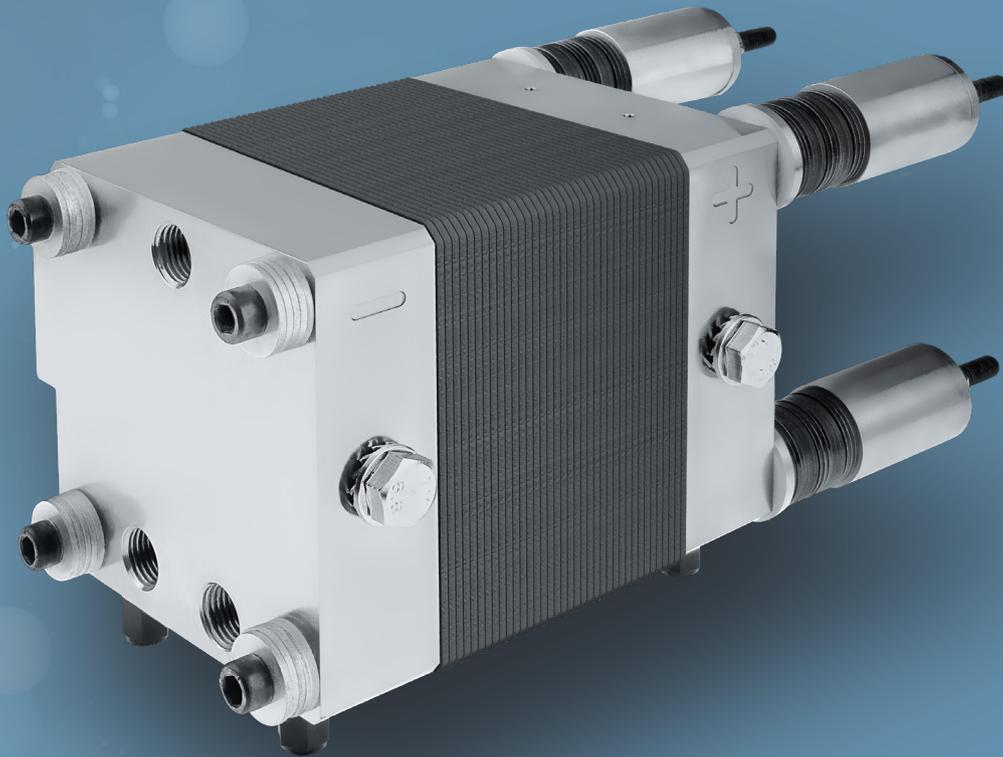

H-TEC Series-S: S 30/30

THE CORE OF ELECTROLYSIS

PEM electrolyser stacks - Designed for ideal integration in systems.



MADE IN GERMANY 

A GP JOULE COMPANY

EFFICIENT STACKS FOR YOUR SYSTEM.

Hydrogen is becoming economical.

From the Series-S 30 of PEM electrolyser stacks particularly OEM customers can find just the right products in the power range up to 10 kW to integrate into their hydrogen application. These stacks impress through their quality, low conversion costs and easy integration into overall solutions.

The usage of the differential pressure electrolysis permits an efficient supply of gas at the storage pressure level of the pressure tank. Their modular structure enables their technical specifications to be adjusted for a wide range of applications.

Parameter	H-TEC Series-S		
	S 30/10	S 30/30	S 30/50
Nominal load	1.00 kW	3.00 kW	5.00 kW
Load range	0.26–1.88 kW	0.77–5.63 kW	1.28–9.38 kW
Load change	Partial load – nominal load = 5 s Nominal load – peak load = 5 s		
Voltage max.	25 VDC	75 VDC	125 VDC
Power	15–75 A		
Nominal efficiency	75 %		
H ₂ nominal production	0.22 Nm ³ h ⁻¹	0.66 Nm ³ h ⁻¹	1.10 Nm ³ h ⁻¹
H ₂ production range	0.06–0.31 Nm ³ h ⁻¹	0.19–0.94 Nm ³ h ⁻¹	0.31–1.57 Nm ³ h ⁻¹
H ₂ purity	Degree 5.0 or 99.999 % with downstream drying		
Operating pressure H ₂	unpressurised – 20 bar		
Operating pressure O ₂	unpressurised		
Water consumption	0.05–0.27 kg h ⁻¹	0.16–0.80 kg h ⁻¹	0.27–1.33 kg h ⁻¹
Cooling water flow rate	3–66 kg h ⁻¹	9–199 kg h ⁻¹	14–330 kg h ⁻¹
Operating temperature	30–70 °C		
H ₂ O purity	DIN ISO 3696 type 1		
MTTF	35 000 h		
Connection power +/-	M8		
H ₂ O connection	G 1/4"		
H ₂ connection	G 1/4"		
Dimensions L x W x H	174 x 107 x 110 mm	224 x 107 x 110 mm	279 x 107 x 110 mm
Weight	3.8 kg	4.7 kg	5.6 kg
Installation position	horizontal		
Ambient temperature	+5 to +45 °C		
Rel. air humidity during operation	5% to 90% not condensing		

ABOUT US

H-TEC SYSTEMS was founded in 1997 and has more than 20 years of experience in the research and development of hydrogen technology. At sites in Schleswig-Holstein and Bavaria in Germany, PEM stacks and electrolysers are produced in the megawatt class for use in industry where hydrogen is required or the quality of an electrical supply has to be refined.

Since 2010, H-TEC SYSTEMS has been a member of the GP JOULE group, which integrates hydrogen-based energy storage equipment into intelligent operating and usage concepts for renewable energies. By using H-TEC electrolysers it is already today possible to couple the electrical power, heating and mobility sectors.

Find out more at H-TEC.COM