
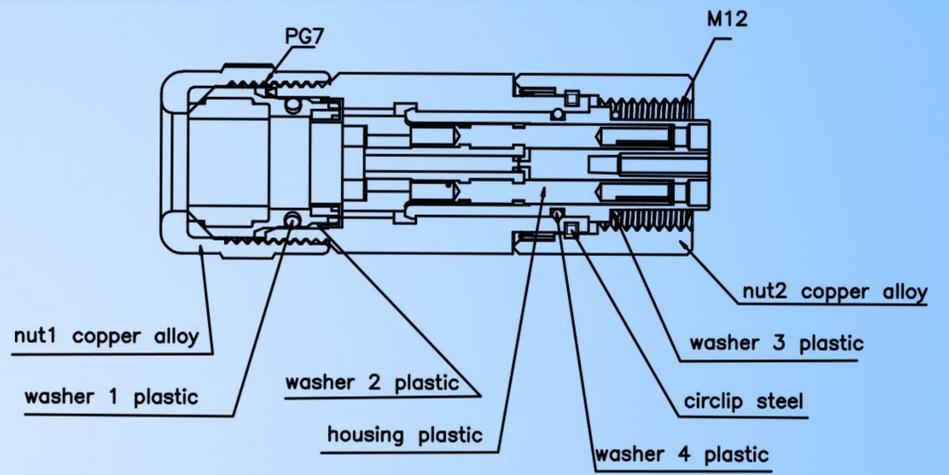



# M12 T-coding Crimp Contacts Connector

## 1. Field Installable

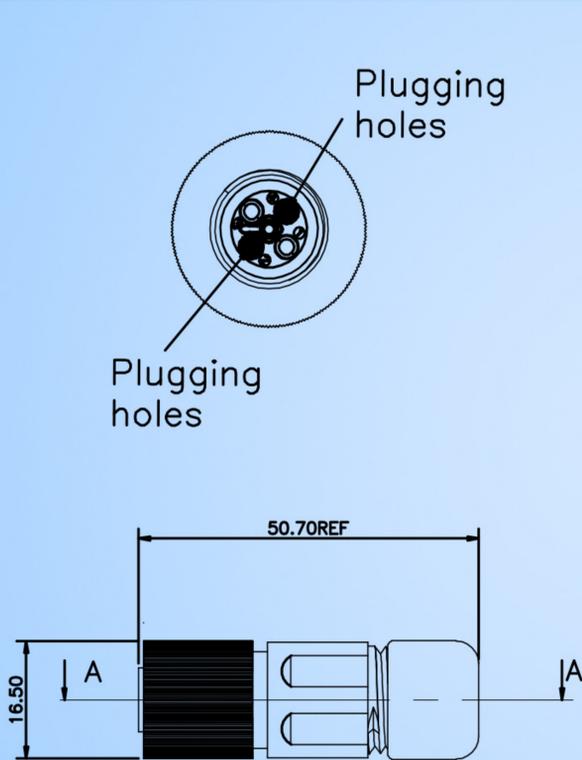


- M12 T-coding 4pin
- Anti-vibration function
- Max 16AWG/1.5mm<sup>2</sup> wire gauge
- -40°C-85°C temperature range
- 12A rated current
- 1500V rated impulse voltage
- IP67 degree of protection
- In accordance with DIN EN 61076-2-111
- Cable assembly & Panel mount type are available


## Assemble Instruction For Crimp Contacts

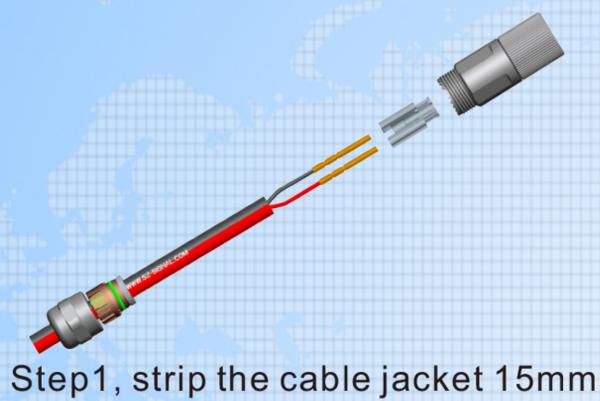


Step1, strip the cable jacket 15mm

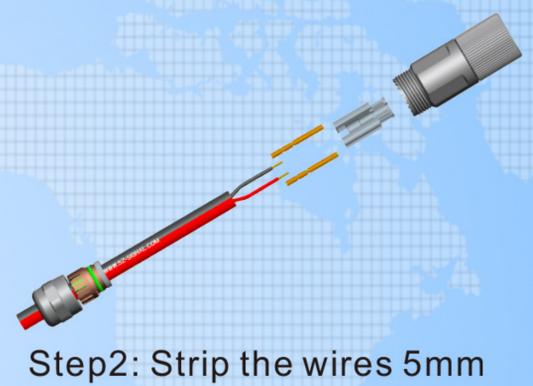

Step2: Strip the wires 5mm

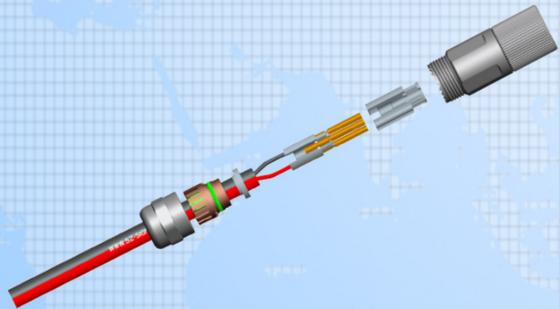

Step3: Assemble as the picture shows.  
Remark: Pay attention to the Pin Number.

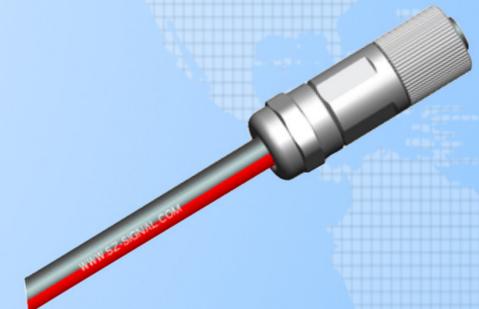

Step4: Screw the nut down. Finish

## 2. Molding Type & Panel Mount

