

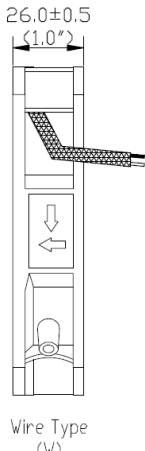
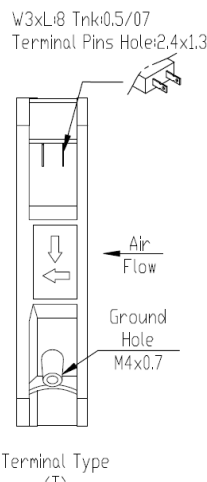


AC FAN SK125AP 120 X 120 X 25mm(4.5")70~48 CFM

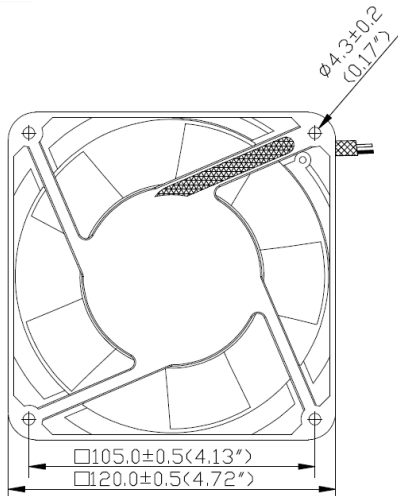


- 馬達 Motor: Shaded pole, impedance protected
- 外殼 Housing / Frame: Die-cast aluminum, Painted black (AP) or Plated (AN)
- 風葉 Impeller: Glass reinforced thermoplastic, UL 94V-0
- 軸承 Bearing Type: Two-ball or sleeve available
- 接電方式 Connecting: T-Terminal push-on type or W-Lead wire type
- 耐壓 Dielectric Strength: 1 min. at 1,500VAC, 50/60Hz
- 溫度範圍 Operating Temp: Ball bearing -20°C~+70°C, Sleeve bearing -10°C~+55°C
- 壽命 Life Expectancy: Ball bearing 60,000 hours at 60°C, Sleeve bearing 20,000 hours at 45°C
- 淨重 Net Weight: 390gm (0.86 pound)
- 檢定 Safety Approvals: UL, CUL, TUV, CE, RoHS

SK125 P-Q Curves

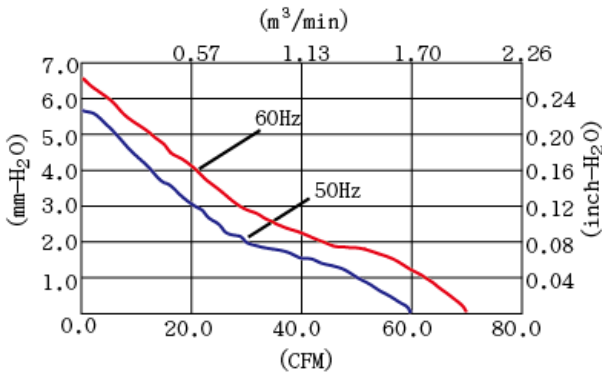


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK125AP-11-1	115 (100V~120V)	50/60	0.25/0.20	17/15	2550/3000	1.7/2.0 60/70	5.7/6.6 0.22/0.26	43/48
SK125AP-11-2	115 (100V~120V)	50/60	0.09/0.08	12/10	2400/2600	1.6/1.8 57/62	4.6/3.8 0.18/0.15	42/39
SK125AP-11-3	115 (100V~120V)	50/60	0.06/0.05	8/6	2100/1900	1.4/1.4 50/48	2.8/1.8 0.11/0.07	39/35
SK125AP-22-1	230 (200V~230V)	50/60	0.09/0.07	17/15	2550/3000	1.7/2.0 60/70	5.7/6.6 0.22/0.26	44/48
SK125AP-22-2	230 (200V~230V)	50/60	0.06/0.05	12/10	2400/2600	1.6/1.8 57/62	4.6/3.8 0.18/0.15	42/45
SK125AP-22-3	230 (200V~230V)	50/60	0.05/0.04	8/6	2000/1750	1.4/1.4 50/48	2.8/1.8 0.11/0.07	36/31

AC FAN SK109AP 120 X 120 X 38mm(4.5")113~80 CFM

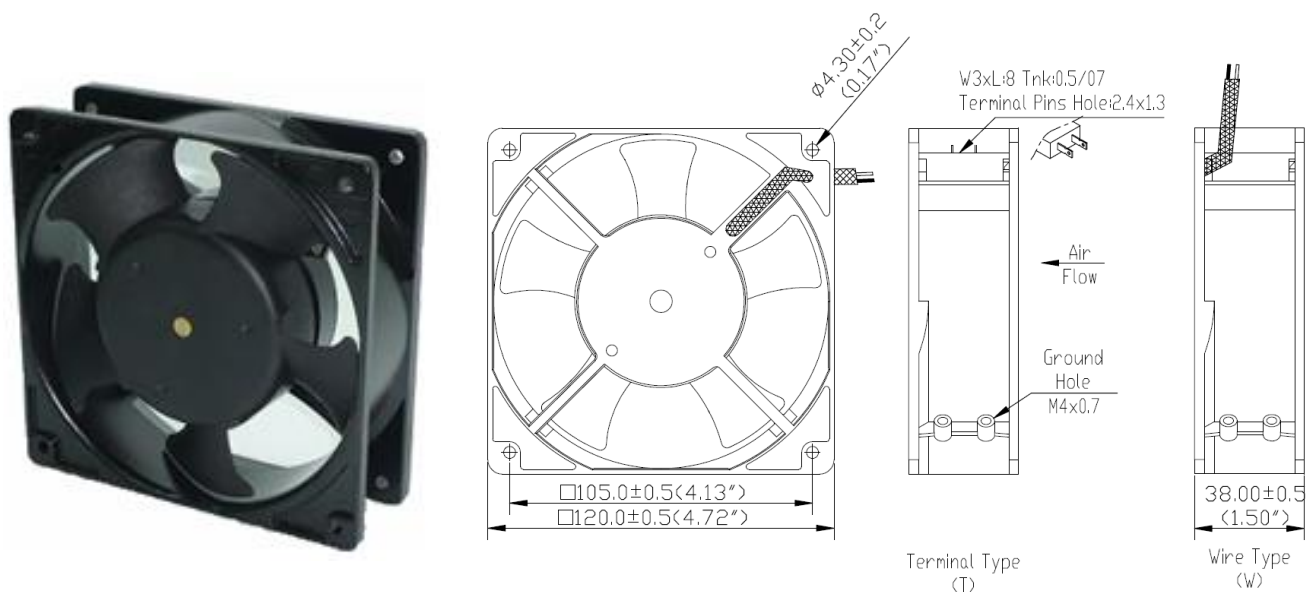


馬達 Motor	Shaded pole, impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	Two-ball or sleeve available
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命 Life Expectancy	Ball bearing 60,000 hours at 60°C Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	550gm (1.2 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK109 P-Q Curves

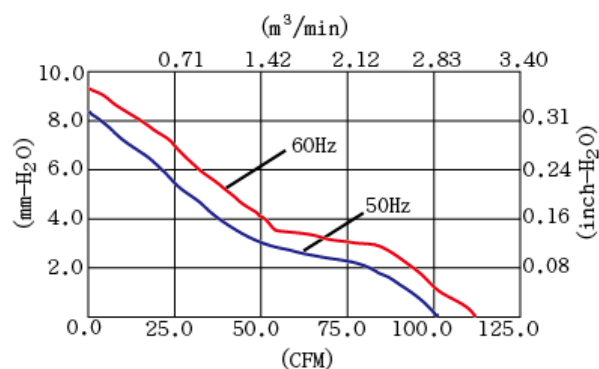


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK109AP-11-1	115 (100V~120V)	50/60	0.25/0.21	17/15	2650/3000	2.9/3.2 101/113	8.3/9.3 0.33/0.37	45/49
SK109AP-11-2	115 (100V~120V)	50/60	0.14/0.13	12/11	2500/2400	2.7/2.6 95/93	6.6/4.0 0.26/0.16	43/45
SK109AP-11-3	115 (100V~120V)	50/60	0.10/0.10	9/8	2300/1800	2.5/2.0 87/69	4.4/2.1 0.17/0.08	41/32
SK109AP-22-1	230 (200V~230V)	50/60	0.12/0.10	17/15	2650/3000	2.9/3.2 101/113	8.3/9.3 0.33/0.37	45/49
SK109AP-22-2	230 (200V~230V)	50/60	0.07/0.06	12/11	2500/2400	2.7/2.6 95/93	6.6/4.0 0.26/0.16	43/41
SK109AP-22-3	230 (200V~230V)	50	0.06	9	2050	2.3 80	3.1 0.12	36/25

AC FAN SK160AP 160 X 160 X 62mm(6.3")315~365 CFM

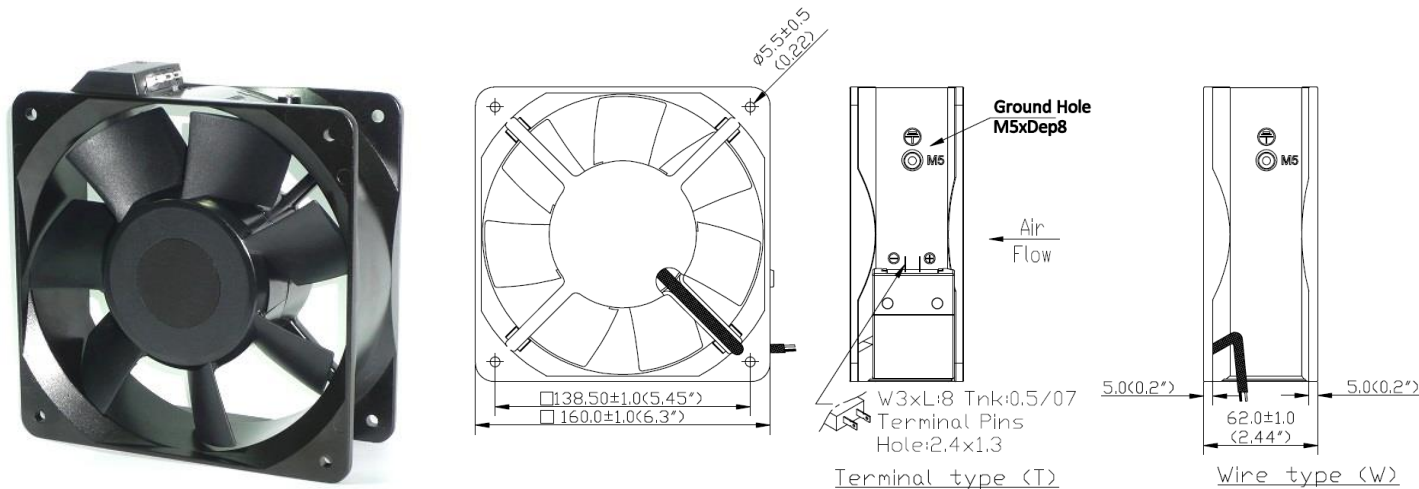


馬達 Motor	Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Recommended ambient range -20°C~+70°C
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	1.4 kg (3.09 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK160 P-Q Curves

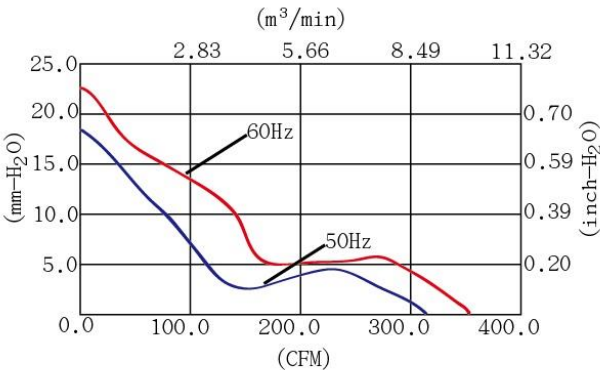


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK160AP-11-1	115 (100V~120V)	50/60	0.49/0.49	48/55	2800/3100	8.9/10 315/356	18.4/22.5 0.72/0.89	60/64
SK160AP-22-1	230 (200V~240V)	50/60	0.25/0.25	48/55	2800/3100	8.9/10 315/356	18.4/22.5 0.72/0.89	60/64

AC FAN SK165AP Ø 172 X 150 X 55mm(6") 166~180 CFM

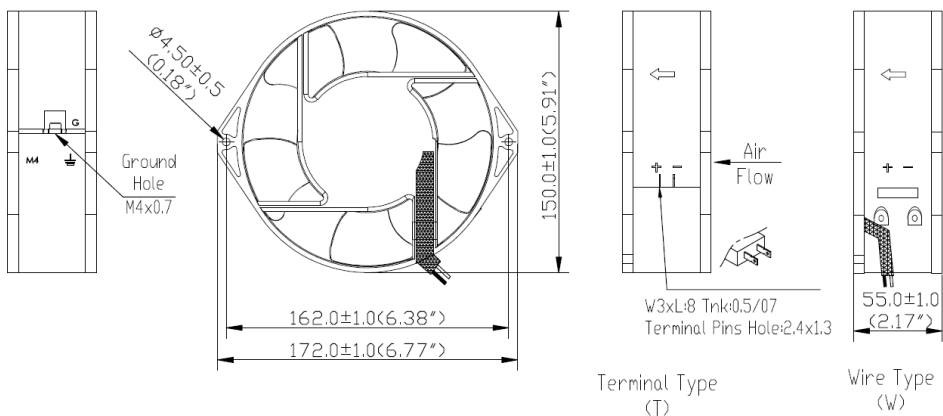


馬達 Motor	Shaded pole, impedance protected or thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ambient -20°C~+55°C
壽命 Life Expectancy	50,000 hours at 25°C 30,000 hours at 65°C
淨重 Net Weight	904gm(1.99 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK165 P-Q Curves

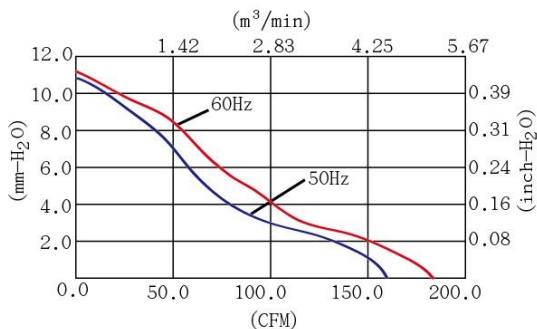


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m ³ /min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK165AP-11-1	115 (100V~120V)	50/60	0.55/0.47	48.3/39.0	2600/2850	4.7/5.1 166/180	10.8/11 0.42/0.43	50/53
SK165AP-22-1	230 (200V~230V)	50/60	0.28/0.23	50.2/40.8	2600/2850	4.7/5.1 166/180	10.8/11 0.42/0.43	50/55

AC FAN SK172AP $\varnothing 172 \times 150 \times 51 \text{mm} (6") 235 \sim 96 \text{ CFM}$

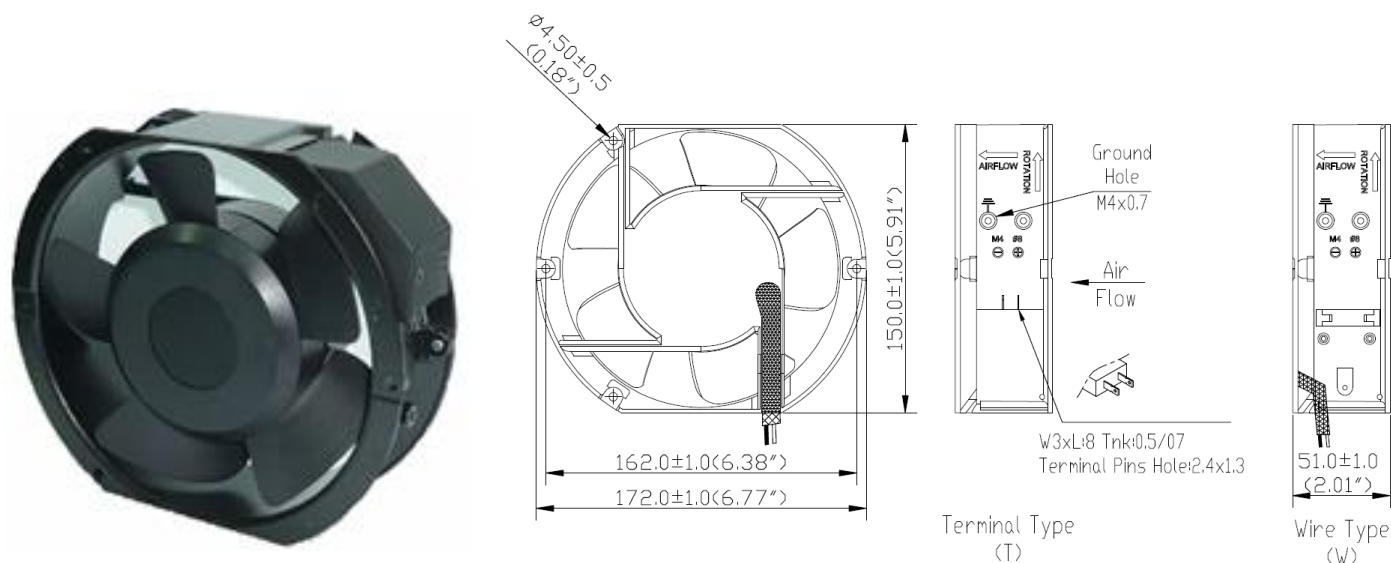

馬達 Motor	Single phase induction capacitor motor, thermally protected or impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ambient -20°C ~ +80°C
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	1,050gm (2.31 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS



SK172 P-Q Curves

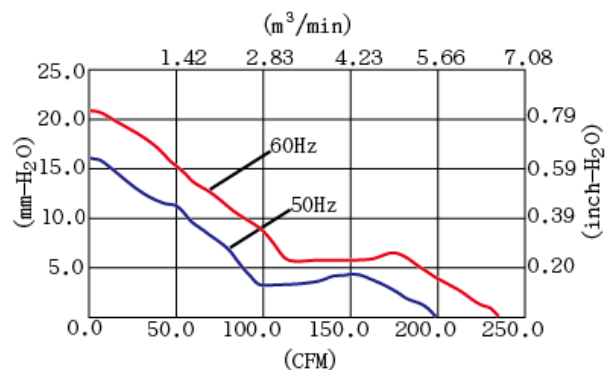

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m ³ /min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK172AP-11-1	115 (100V~120V)	50/60	0.24/0.25	24/28	2800/3200	5.6/6.7 199/235	16/21 0.63/0.83	57/61
SK172AP-11-2	115 (100V~120V)	50/60	0.17/0.21	20/23	2550/2400	4.9/4.7 172/165	11/8.8 0.43/0.35	53/51
SK172AP-11-3	115 (100V~120V)	50/60	0.16/0.20	16/18	1450/1750	2.7/3.2 96/114	3.8/5.6 0.15/0.22	36/41
SK172AP-22-1	230 (200V~240V)	50/60	0.12/0.16	24/28	2800/3200	5.6/6.7 199/ 235	16/21 0.63/0.83	56/60
SK172AP-22-2	230 (200V~240V)	50/60	0.10/0.12	20/23	2550/2300	4.9/4.7 172/165	11/8.8 0.43/0.35	53/50
SK172AP-22-3	230 (200V~240V)	50/60	0.09/0.016	16/18	1450/1750	2.7/3.2 96/114	3.8/5.6 0.15/0.22	36/42

AC FAN SK170AP

Ø172 X 150 X 51mm(6") 310~275 CFM

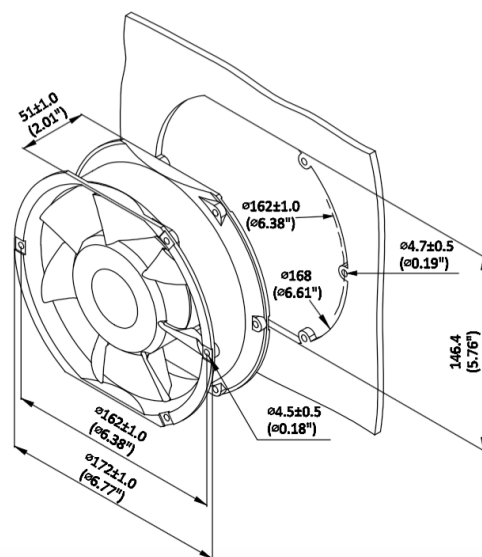

馬達 Motor

Single phase induction capacitor motor,
thermally protected or impedance protected
Die-cast aluminum, Painted black (AP) or
Plated (AN)

外殼 Housing / Frame

風葉 Impeller

Glass reinforced thermoplastic, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connecting

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Ambient -20°C~+70°C


壽命 Life Expectancy

60,000 hours at 25°C
40,000 hours at 65°C

檢定 Safety Approvals


UL, CUL, TUV, CE, ISO9001

SK170 P-Q Curves

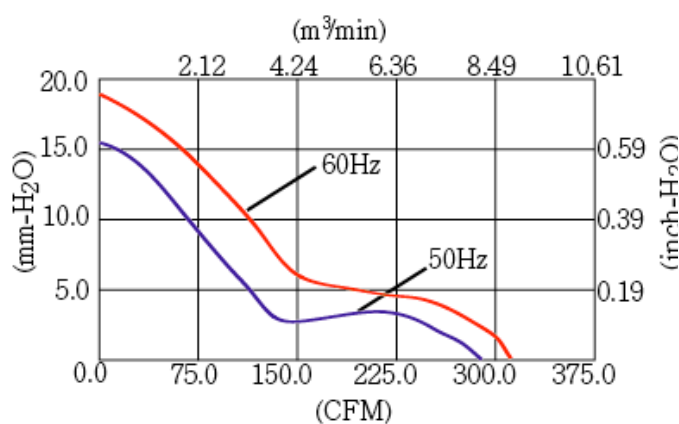


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK170AP-11-1	115 (110V~120V)	50/60	0.52/0.52	59/56	2675/3046	7.7/8.7 275/310	15/19.1 0.59/0.75	56/59
SK170AP-22-1	230V (220V~240V)	50/60	0.26/0.26	59/56	2609/2960	7.7/8.7 275/310	15/19.1 0.59/0.75	56/59

AC FAN SK176AP 176 X 176 X 89mm(7")420~370CFM

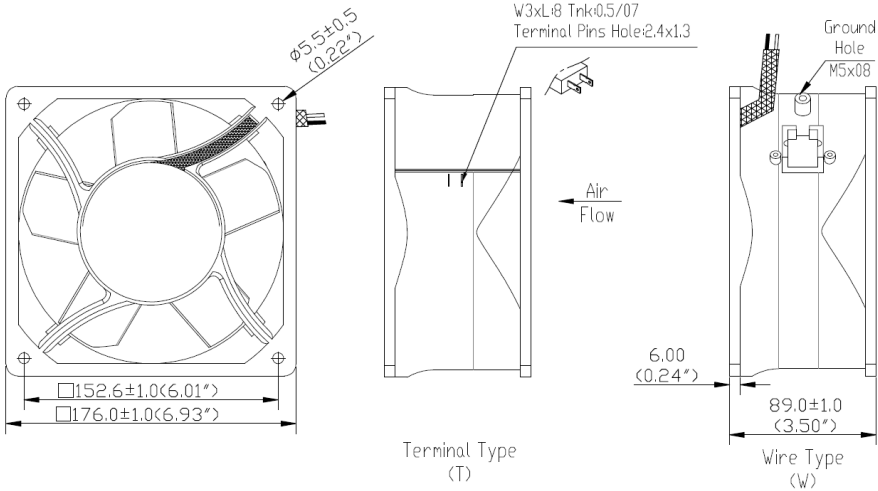


- 馬達 Motor: Single phase induction capacitor motor, thermally protected
- 外殼 Housing / Frame: Die-cast aluminum, Painted black (AP) or Plated (AN)
- 風葉 Impeller: Glass reinforced thermoplastic, UL 94V-0
- 軸承 Bearing Type: Two-ball bearing
- 接電方式 Connecting: T-Terminal push-on type or W-Lead wire type
- 耐壓 Dielectric Strength: 1 min. at 1,500VAC, 50/60Hz
- 溫度範圍 Operating Temp: Recommended ambient range -20°C~+70°C
- 壽命 Life Expectancy: 60,000 hours at 25°C
40,000 hours at 65°C
- 淨重 Net Weight: 2 kg (4.4 pounds)
- 檢定 Safety Approvals: UL, CUL, TUV, CE, RoHS

SK176 P-Q Curves

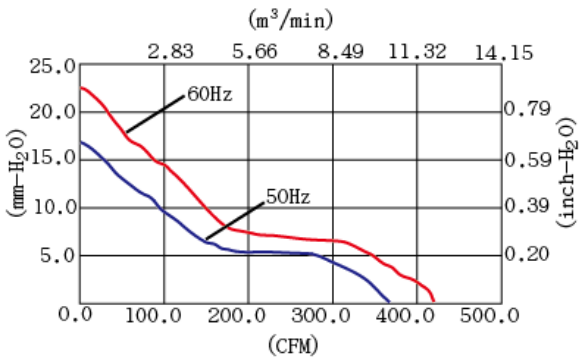


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM		最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O		噪音 Noise Level (dB)
SK176AP-11-1	115 (100V~120V)	50/60	0.57/0.48	50/52	2800/3250	10.5/11.9	370/420	16.9/22.4	0.67/0.88	61/64
SK176AP-22-1	230 (200V~240V)	50/60	0.21/0.23	43/52	2800/3250	10.5/11.9	370/420	16.9/22.4	0.67/0.88	61/64

AC FAN SK180AP 180 X 180 X 65mm(7")420~370 CFM

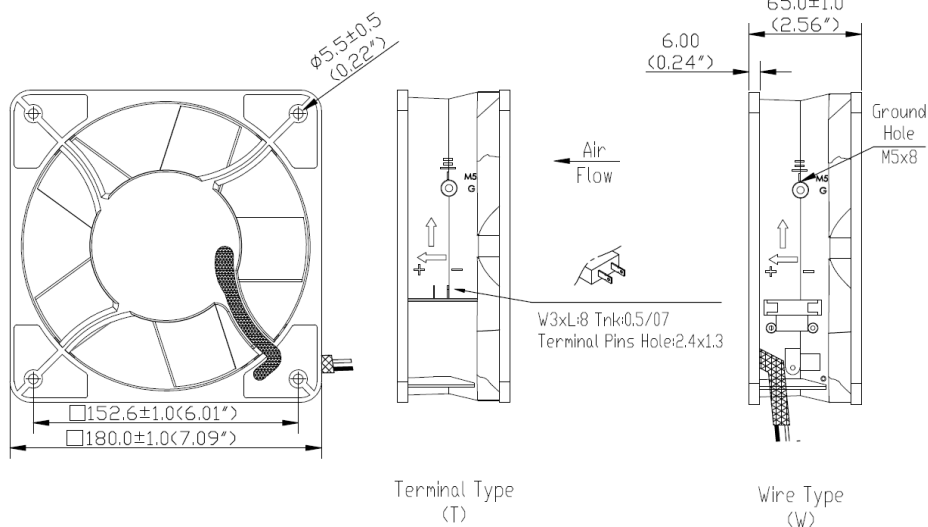



馬達 Motor	Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Recommended ambient range -20°C~+70°C
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	1.8 kg (3.97 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK180 P-Q Curves

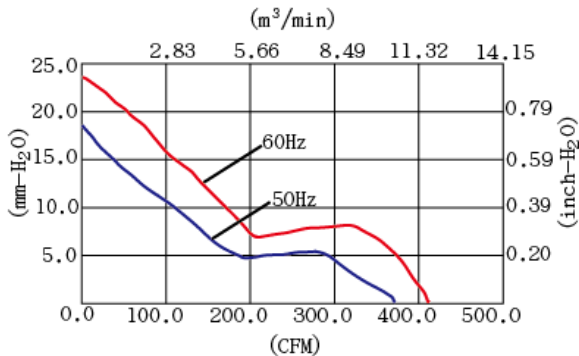


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m ³ /min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK180AP-11-1	115 (100V~120V)	50/60	0.54/0.50	50/52	2800/3250	10.5/11.9 370/420	18.3/23.6 0.72/0.93	60/63
SK180AP-22-1	230 (200V~240V)	50/60	0.23/0.24	43/52	2800/3250	10.5/11.9 370/420	18.3/23.6 0.72/0.93	59/63

AC FAN SK205AP 205 X 205 X 72mm(8")710~620 CFM

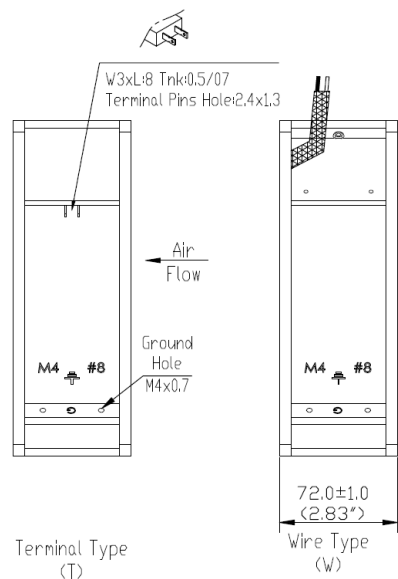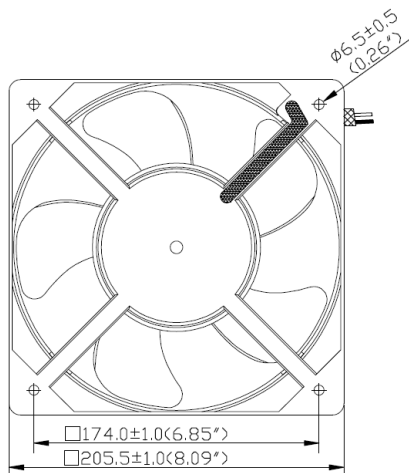

馬達 Motor	Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Recommended ambient range -20°C~+70°C
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	2.1 kg (4.6 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS



SK205 P-Q Curves

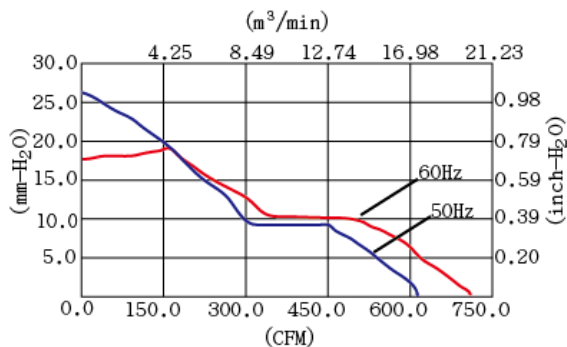

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m³/min	CFM	mm-H₂O	inch-H₂O	
SK205AP-11-1	115 (100V~120V)	50/60	0.60/1.00	65/102	2850/3250	17.5/20.1	620/710	26.4/17.4	1.04/0.69	67/71
SK205AP-22-1	230 (200V~240V)	50/60	0.30/0.49	65/102	2850/3250	17.5/20.1	620/710	26.4/17.4	1.04/0.69	68/71

AC FAN SK225AP

225 X 225 X 80mm(9")750~630 CFM

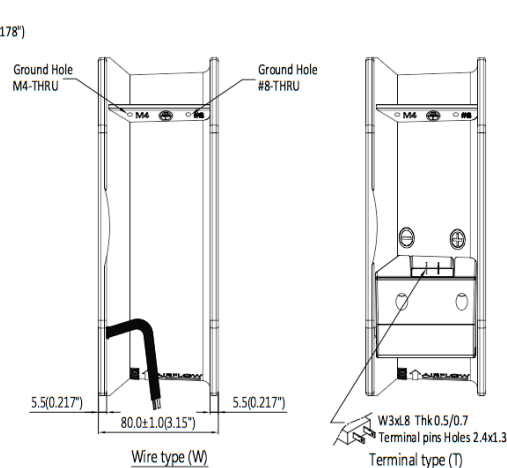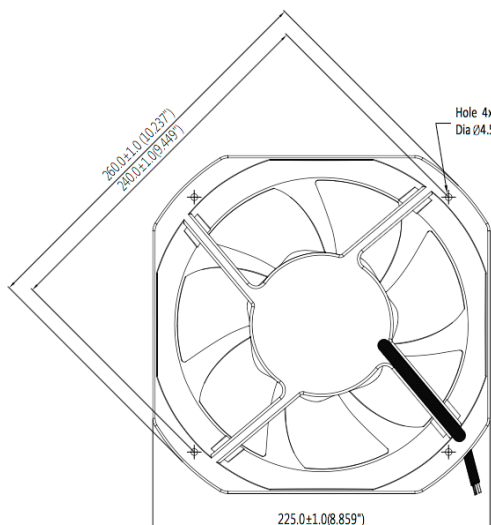

馬達 Motor

Single phase induction capacitor motor, thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

Glass reinforced thermoplastic, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connecting

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Recommended ambient range -20°C~+70°C

壽命 Life Expectancy

60,000 hours at 25°C
40,000 hours at 65°C


淨重 Net Weight

2.88 kg

檢定 Safety Approvals



UL, CUL, TUV, CE, RoHS

SK225 P-Q Curves

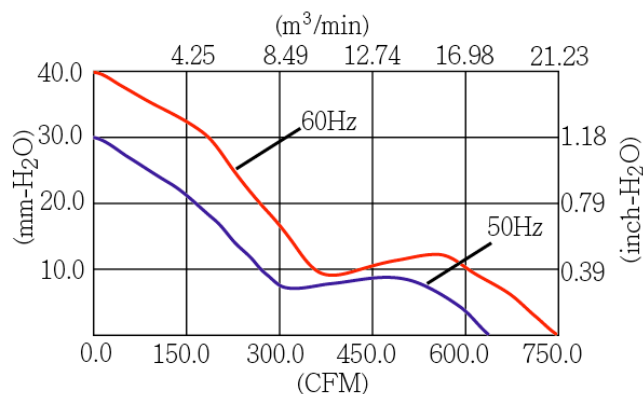


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m ³ /min CFM		最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O		噪音 Noise Level (dB)
SK225AP-11-1	120 (110V~120V)	50/60	0.98/0.90	76/98	2920/3450	17.8/21.2	630/750	30/40	1.18/1.57	63/67
SK225AP-22-1	240 (220V~240V)	50/60	0.45/0.45	88/105	2920/3450	17.8/21.2	630/750	30/40	1.18/1.57	63/67

AC FAN SK254AP 254 X 89mm (10") 730~460 CFM

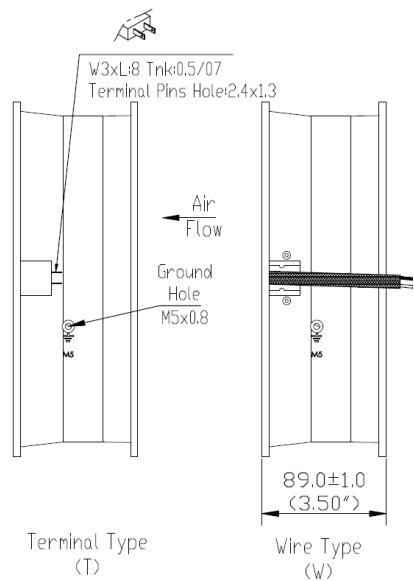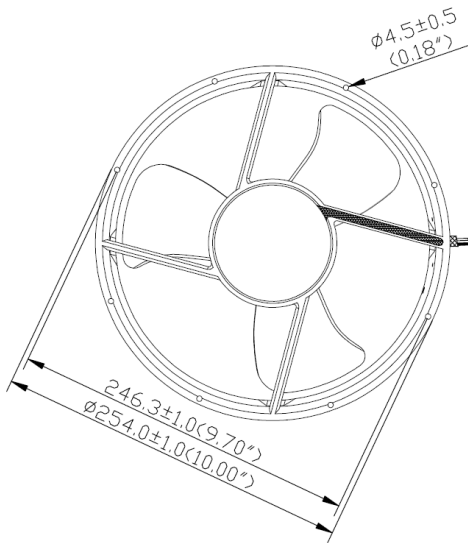


馬達 Motor	Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	Two-ball
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Recommended ambient range -20°C~+70°C
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	2 kg (4.4 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK254 P-Q Curves

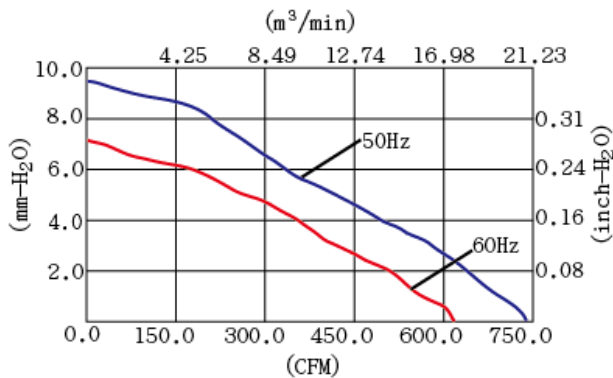


型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H₂O inch-H₂O	噪音 Noise Level (dB)
SK254AP-11-1	115 (100V~120V)	50/60	0.55/0.62	60/67	2100/1800	20.7/18.1 730/640	9.4/7.2 0.37/0.28	61/57
SK254AP-11-2	115 (100V~120V)	50/60	0.22/0.24	34/37	1400/1600	13.0/15.3 460/540	6.6/7.9 0.27/0.31	52/59
SK254AP-22-1	230 (200V~240V)	50/60	0.26/0.30	60/67	2100/1800	20.7/18.1 730/640	9.4/7.2 0.37/0.28	61/58
SK254AP-22-2	230 (200V~240V)	50/60	0.16/0.14	34/37	1400/1600	13.0/15.3 460/540	6.6/7.9 0.27/0.31	49/53

AC FAN SK280AP 280 X 89mm (11") 1480~680 CFM

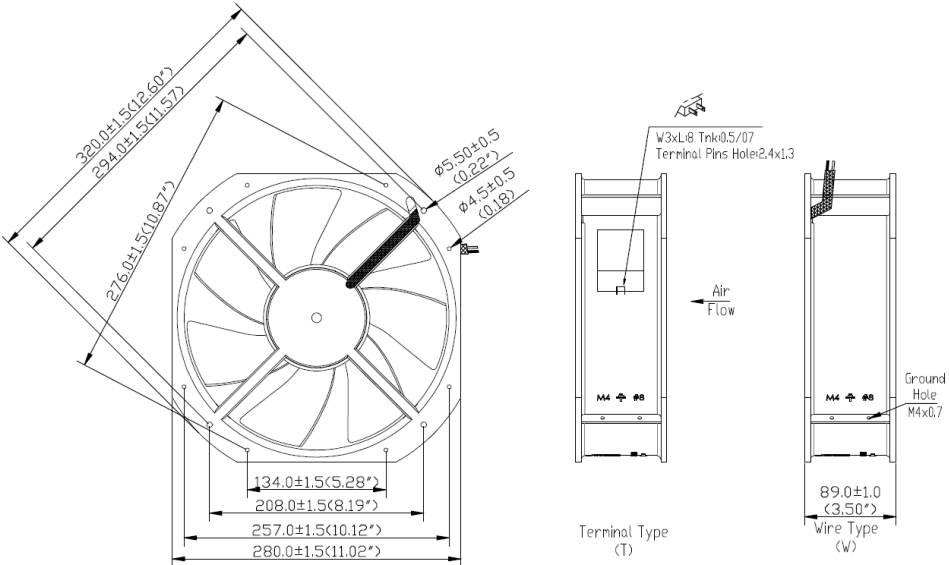

馬達 Motor	Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	Two-ball Bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Recommended ambient range $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	4.24 kg
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK280 P-Q Curves

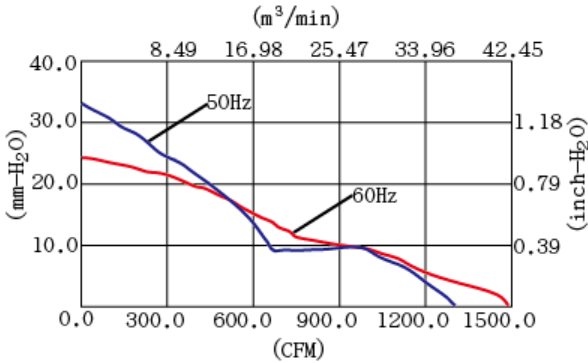

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m ³ /min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK280AP-11-1	115 (100V~120V)	50/60	1.70/2.84	185/300	2800/3200	39.1/41.9 1380/1480	33.0/24.0 1.30/0.94	67/69
SK280AP-11-2	115 (100V~120V)	50/60	0.82/0.67	61/60	1500/1700	19.2/22.9 680/810	9.8/12.8 0.39/0.50	56/59
SK280AP-22-1	230 (200V~240V)	50/60	0.80/1.29	185/290	2800/3200	39.1/41.9 1380/1480	33.0/24.0 1.30/0.94	73/75
SK280AP-22-2	230 (200V~240V)	50/60	0.42/0.35	62/65	1500/1700	19.2/22.9 680/810	9.8/12.8 0.39/0.50	56/59