

## Laboratory Refrigerators and Freezers

- ▶ Refrigerators and Upright Freezers
- ▶ Bloodbank Refrigerators and Freezers
- ▶ Chest Freezers
- ▶ Temperature Monitoring and Recording Systems
- ▶ Recirculating Chillers

**2019**

**[www.NationalLab.com](http://www.NationalLab.com)**

**National Lab GmbH** • Grambeker Weg 157 • D-23879 Moelln  
Tel: +49 45 42/84 91-70 • Fax: +49 45 42/84 91-71 • E-mail: [LabSales@NationalLab.com](mailto:LabSales@NationalLab.com)

## Laboratory Upright Freezer ProfiLine Pegasus PLPE

- Static cooling and manual defrost
- Most reliable and less complicated compressor technology from Danfoss
- Electronic control with digital display
  - Visual/audible alarm device
  - Power failure alarm
- No-volt remote alarm contact for connection to an alarm system on the premises
- Rechargeable battery for full retention of all controller features
- Lockable door, door hinges on right
- Interior made of stainless steel CNS (hygienic and easy to clean)
- Duct to storage compartment



ProfiLine Pegasus PLPE 0486  
(With accessories Inventory Systems.  
See sep. brochure.)

### Model ProfiLine Pegasus PLPE 0486

Temperature range	°C:	-60/-80
Content litres	litres (gross):	35
Ext. dimensions (WxDxH)	mm:	490x650x670
Int. dimensions (WxDxH)	mm:	330x355x300
Depth with door opened	mm:	1070
Weight	kgs:	60
Mains connection	:	1/N/PE ~ 230 V 50-60 Hz
Shipping dimensions (WxDxH)	mm:	800x600x875
Shipping weight	kgs:	80
Refrigerant CFC- and HCFC-free	:	EP88

**Alternative units:** ProfiMaster PMU0452.

### ProfiLine Pegasus + Accessories:

	Cat. No.
ProfiLine Pegasus PLPE 0486	GSPLPE0486
ProfiTec Temperature Monitoring and Recording System (see sep. brochure).	GPTEC4A
ProfiCaller telephone dialler (see sep. brochure).	on request
Temperature recorder, 7 days, circular chart.	on request
Pt-100 temperature sensor, add. installed for ext. temperature recording.	ZXX2-020-2L
CO <sub>2</sub> back-up system, free-standing.	ZXX2-093
Facilities for customer connection of CO <sub>2</sub> back-up system.	ZPLPE2-094
Storage set (see below).	on request
Stainless steel insert with drawers (see below).	see table
MIN/MAX digital thermometer. Hand-held unit with digital display as well as data-hold and relative measuring function. Measuring range -200/+1370 °C.	ZXX2-019-011
An add. temperature sensor is required, eg. Cat.-No. ZXX2-022-100.	ZXX2-022-100
Temperature sensor for MIN/MAX thermometer ZXX2-019-011.	
Measuring range -100/+1000 °C. Length 2 m. Other ranges on request.	


### ProfiTec Intelligent Temperature Monitoring and Recording System




- For up to 4 refrigerators and/or freezers
- Readings are stored over a period up to 781 days
- Warning for excess and insufficient temperature
- Includes No-volt remote alarm contact
- The measuring protocol can be fed to PC via RS 232 port

### Storage System alternatives

#### Storage Set (modifiable)



#### Stainless Steel Insert with 3 Drawers (modifiable)



Drawers	Height (mm)	Cat. No.
2	140	ZPLPE3-002
3	91	ZPLPE3-003
4	67	ZPLPE3-004
5	52	ZPLPE3-005
6	43	ZPLPE3-006
7	36	ZPLPE3-007
8	31	ZPLPE3-008
9	27	ZPLPE3-009
10	24	ZPLPE3-010

Height= Effective internal height of each drawer

Recommendations for additional storage sets can be found in our separate catalogue.

Please ask for a personal fitting option.



### Laboratory Upright Freezer ProfiLine Pegasus PLPE

- Static cooling and manual defrost
- Micro-processor driven temperature controller with digital display and password protection
  - Visual/audible alarm device, mains-independent
  - Alarm warning for excess and insufficient temperature
  - Power failure alarm
  - Probe failure alarm
  - Door alarm
  - Integrated data logger with USB port
- No-volt remote alarm contact for connection to an alarm system on the premises
- RS 485 port
- Prepared for GSM alarm
- External housing made of white, galvanized steel plate
- Lockable door, door hinges on right
- Insulated inner doors to minimize cold air loss
- Interior made of stainless steel CNS
- Duct to storage compartment
- front feet of cabinet allow for height adjustment, two castors at rear



ProfiLine Pegasus PLPE 06xxEWN

### Model ProfiLine Pegasus PLPE0640 PLPE0686 PLPE1240 PLPE1286

Temperature range	°C:	-20/-40	-40/-86	-20/-40	-40/-86
Content litres	litres (gross):	55		115	
Ext. dimensions (WxDxH)	mm:	600x700x815		950x725x810	
Int. dimensions (WxDxH)	mm:	360x505x310		360x493x530	
Compartments/inner doors	:	1/1		2/2 (2x260 mm in height)	
Depth with door opened	mm:	1200		1225	
Weight	kgs:	80		100	
Mains connection	:	1/N/PE ~ 230 V 50-60 Hz		1/N/PE ~ 230 V 50-60 Hz	
Shipping dimensions (WxDxH)	mm:	660x800x1000*		1010x800x1000*	
Shipping weight	kgs:	100*		130*	
Refrigerant CFC- and HCFC-free	:	R404A	EP88	R404A	EP88

\* Shipping in a wooden crate.



ProfiLine Pegasus PLPE 12xxEWN

Model	Outside/Inside	Cat. No.
PLPE0640...	EWN: white/CNS	GSPLPE0640EWN
PLPE0686...	EWN: white/CNS	GSPLPE0686EWN
PLPE1240...	EWN: white/CNS	GSPLPE1240EWN
PLPE1286...	EWN: white/CNS	GSPLPE1286EWN

ProfiTec Temperature Monitoring and Recording System (see sep. brochure). GPTEC4A  
 ProfiCaller telephone dialler (see sep. brochure). on request  
 Pt-100 temperature sensor, add. installed for ext. temperature recording. ZXX2-020-2L  
 CO<sub>2</sub> back-up system, free-standing. ZXX2-093  
 Facilities for customer connection of CO<sub>2</sub> back-up system. ZPLPE2-094  
 MIN/MAX digital thermometer. Hand-held unit with digital display as well as ZXX2-019-011  
 data-hold and relative measuring function. Measuring range -200/+1370 °C.  
 An add. temperature sensor is required, eg. Cat.-No. ZXX2-022-100.  
 Temperature sensor for MIN/MAX thermometer ZXX2-019-011. ZXX2-022-100  
 Measuring range -100/+1000 °C. Length 2 m. Other ranges on request.


### ProfiTec Intelligent Temperature Monitoring and Recording System




- For up to 4 refrigerators and/or freezers
- Readings are stored over a period up to 781 days
- Warning for excess and insufficient temperature
- Includes No-volt remote alarm contact
- The measuring protocol can be fed

to PC via RS 232 port


### Storage System Alternatives

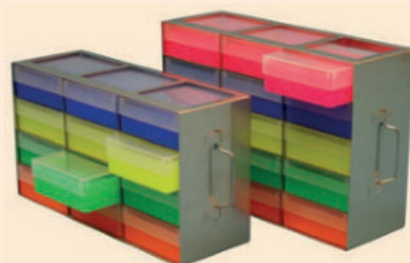


Stainless steel horizontal racks

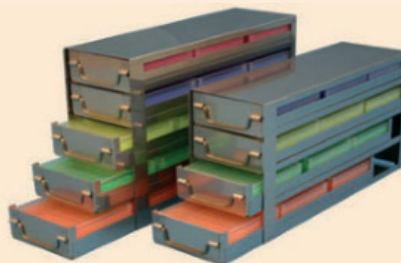

Stainless steel drawer racks

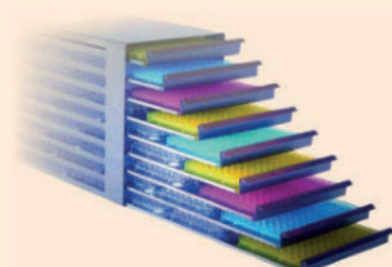

Microtiter stainless steel drawer racks




Stainless steel insert with drawers



Please ask for a personal fitting option.

Recommendations for additional storage sets can be found in our separate catalogue.





## Laboratory Upright Freezer ProfiLine Pegasus PLPE

- Static cooling and manual defrost
- 2 separate, redundant operating cooling circuits for a maximum safety (PLPE7286EWN only)
- Micro-processor driven temperature controller with digital display and password protection
  - Visual/audible alarm device, mains-independent
  - Alarm warning for excess and insufficient temperature
  - Power failure alarm
  - Probe failure alarm
  - Door alarm
  - Integrated data logger with USB port
- No-volt remote alarm contact for connection to an alarm system on the premises
- RS 485 port
- Prepared for GSM alarm
- Lockable door, door hinges on right, can only be changed in factory
- External housing made of white, galvanized steel plate
- Interior made of stainless steel CNS
- 5 compartments with additional inner doors
- Duct to storage compartment for external sensor
- 4 castors, 2 lockable



ProfiLine Pegasus  
PLPE4286EWN

Model ProfiLine Pegasus	PLPE4240	PLPE4286	PLPE6240	PLPE6286	PLPE7240	PLPE7286
Temperature range °C:	-20/-40	-40/-86	-20/-40	-40/-86	-20/-40	-40/-86
Content litres (gross):	393	393	556	556	642	642
Number of compressors :	1	1	1	1	1	2
Ext.dimensions (WxDxH) mm:	720x885x1990		920x885x1990		1030x885x1990	
Dim. compartment (WxDxH) mm:	440x595x255		640x595x255		750x595x260	
Depth with door opened mm:	1475	1475	1675	1675	1790	1790
Weight kg:	175	175	203	203	242	242
Mains connection :	1/N/PE ~ 230 V 50-60 Hz		1/N/PE ~ 230 V 50-60 Hz		1/N/PE ~ 230 V 50-60 Hz	
Shipping dim. (WxDxH)* mm:	840x1040x2310*		1040x1070x2310*		1150x1070x2310*	
Shipping weight* kg:	244*	244*	333*	333*	388*	388*
Refrigerant CFC- and HCFC-free :	R404A	EP88	R404A	EP88	R404A	EP88

\* Shipping in a wooden box.

### ProfiLine Pegasus + Accessories: Outside / Inside

		Cat. No.
ProfiLine Pegasus PLPE4240EWN	white / CNS	GSPLPE4240EWN
ProfiLine Pegasus PLPE4286EWN	white / CNS	GSPLPE4286EWN
ProfiLine Pegasus PLPE6240EWN	white / CNS	GSPLPE6240EWN
ProfiLine Pegasus PLPE6286EWN	white / CNS	GSPLPE6286EWN
ProfiLine Pegasus PLPE7240EWN	white / CNS	GSPLPE7240EWN
ProfiLine Pegasus PLPE7286EWN	white / CNS	GSPLPE7286EWN

ProfiTec Temperature Monitoring and Recording System (see separate data sheet). GPTEC4A

ProfiCaller telephone dialler.

on request

Pt-100 temperature sensor, add. installed for ext. temperature recording.

ZXX2-020-2L

Circular chart recorder for 7 days.

on request

6" 7-day circular charts. Pck. of 100 pieces.

on request

CO<sub>2</sub> back-up system, free-standing.

ZXX2-093

Facilities for customer connection of CO<sub>2</sub> back-up system.

ZPLPE2-094

MIN/MAX digital thermometer. Hand-held unit with digital display as well as data-hold and relative measuring function. Measuring range -200/+1370 °C.

ZXX2-019-011

An add. temperature sensor is required, eg. Cat.-No. ZXX2-022-100.

Temperature sensor for MIN/MAX thermometer ZXX2-019-011.

ZXX2-022-100

Measuring range -100/+1000 °C. Length 2 m. Other ranges on request.




### ProfiTec Intelligent Temperature Monitoring and Recording System



- For up to 4 refrigerators and/or freezers
- Readings are stored over a period up to 781 days
- Warning for excess and insufficient temperature
- Includes No-volt remote alarm contact
- The measuring protocol can be fed to PC via RS 232 port

### Storage System (modifiable) for PLPE 42..

**5 compartments** each with 3 stainless steel racks to hold 16 boxes (height 50 mm) each.  
15 x 16 = 240 boxes

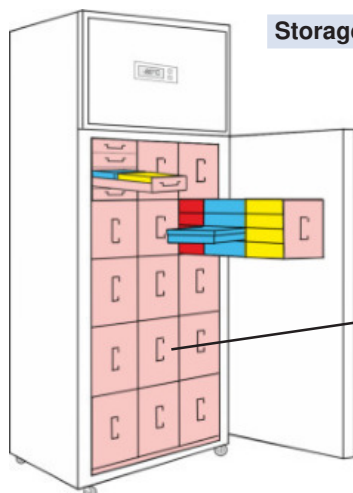

Please ask for a personal fitting option.

Recommendations for additional storage sets can be found in our separate catalogue.



## Laboratory Chest Freezer ProfiLine Taurus PLTA

- Static cooling and manual defrost
- Most reliable and less complicated compressor technology, low-noise
- Micro-processor driven temperature controller with digital display
- Visual/audible alarm device
  - Alarm warning for excess and insufficient temperature
  - No-volt remote alarm contact
- External housing made of white, galvanized steel plate
- Interior made of white plastic
- Lockable lid and spring-loaded hinges to allow opening at any angle
- With castors, supplied separately (except for PLTA 0962 and PLTA 5562, see accessories)
- Storage baskets optional (see below)




Model ProfiLine Taurus	PLTA 0962	PLTA1462	PLTA 3362	PLTA 4362	PLTA 5562
Temperature range	°C: -30/-60	-30/-60	-30/-60	-30/-60	-30/-60
Content litres (gross):	74	133	296	383	532
Ext. dimensions (WxDxH) mm:	555x635x885	720x695x890	1260x695x890	1560x695x890	1705x655x865
Int. dimensions 1 (WxDxH) mm:	387x387x470	350x435x650	880x435x650	1190x435x650	1340x490x700
Int. dimensions 2 (WxDxH) mm:	—	200x435x400	200x435x400	200x435x400	200x490x450
Height at open top mm:	1480	1500	1500	1500	1540
Baskets optional (max. quantity)	4 (type A)	4 (type B)	13 (type B)	16 (type B)	19 (type C)
Weight kgs:	53	55	76	88	107
Mains connection	< 1/N/PE ~ 230 V 50-60 Hz >				
Shipping dimensions (WxDxH) mm:	750x700x1140	800x730x1040	1320x800x1040	1620x800x1040	1720x800x1200
Shipping weight kg:	63	66	91	103	131
Refrigerant	Mix	Mix	Mix	Mix	Mix

## Accessories

## Cat. No.

ProfiTec Temperature Monitoring and Recording System (see separate brochure).	GPTEC4A
ProfiCaller telephone dialler.	on request
Pt-100 temperature sensor, additionally installed for external temperature recording.	ZXX2-020-2L
CO <sub>2</sub> back-up system, free-standing.	ZXX2-093
Facilities for customer connection of CO <sub>2</sub> back-up system.	ZPLTA2-094
Ex-Version „Interior free of ignition sources.“	ZPLTA1-070
Transport carriage with 4 swivel castors (for PLTA 0962).	ZPLTA5-21-09xx
4 castors, 2 lockable (for PLTA 5562).	on request
Storage basket (type A), 192x384x190 mm (WxDxH).	ZXX4-084
Storage basket (type B), 220x430x200 mm (WxDxH).	ZXX4-085
Storage basket (type C), 220x480x215 mm (WxDxH).	ZXX4-093

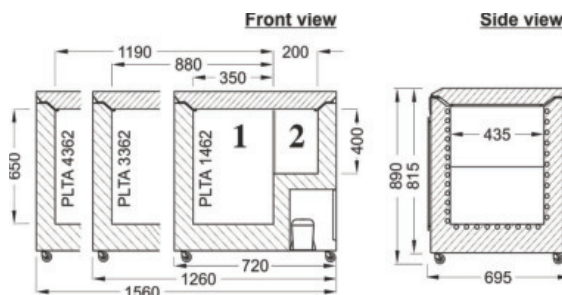

## ProfiTec

## Intelligent Temperature Monitoring and Recording System


- For up to 4 refrigerators and/or freezers
- Readings are stored over a period up to 781 days
- Warning for excess and insufficient temperature
- Includes No-volt remote alarm contact
- Can be fed to PC via RS 232 port



## Storage sets with matching vertical racks made of stainless steel




## Number of racks when fully equipped




Type of box  
**ALPHA Box**  
**BRAVO Box**  
**EPPI® Box**



Type of box  
**ALPHA Box**  
**BRAVO Box**  
**EPPI® Box**



Type of box  
**ALPHA Box**  
**BRAVO Box**  
**EPPI® Box**




4 or 5

Cat. No.  
TA50-08AN  
TE50-08AN  
TE50-08AN

Cat. No.  
TA75-05AN  
TB75-05AN  
TE80-05AN

Cat. No.  
TA100-04AN  
TE102-04AN  
TE102-04AN

PLTA 1462 on request



18

Cat. No.  
TA50-11AN  
TE50-11AN  
TE50-11AN

Cat. No.  
TA75-07AN  
TB75-07AN  
TE80-07AN


Cat. No.  
TA100-03AN  
TE102-03AN  
TE102-03AN

3

Cat. No.  
TA50-06AN  
TE50-06AN  
TE50-06AN

Cat. No.  
TA75-04AN  
TB75-04AN  
TE80-04AN

Cat. No.  
TA100-03AN  
TE102-03AN  
TE102-03AN

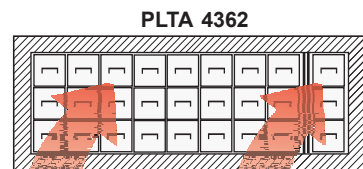

24

Cat. No.  
TA50-11AN  
TE50-11AN  
TE50-11AN

Cat. No.  
TA75-07AN  
TB75-07AN  
TE80-07AN

Cat. No.  
TA100-03AN  
TE102-03AN  
TE102-03AN

3

Cat. No.  
TA50-06AN  
TE50-06AN  
TE50-06AN

Cat. No.  
TA75-04AN  
TB75-04AN  
TE80-04AN

Cat. No.  
TA100-03AN  
TE102-03AN  
TE102-03AN

PLTA 5562 on request

## Laboratory Chest Freezer ProfiLine Taurus PLTA

- Static cooling and manual defrost
- Most reliable and less complicated compressor technology, low-noise
- Micro-processor driven temperature controller with digital display
- Visual/audible alarm device
  - Mains-independent
  - Alarm warning for excess and insufficient temperature
  - No-volt remote alarm contact
- RS 232 port
- Integrated data logger with USB port (models PLTA ..86 only)
- External housing made of white, galvanized steel plate
- Interior made of white plastic
- Inner lids
- Lockable lid and spring-loaded hinges to allow opening at any angle
- With castors, supplied separately (except for PLTA 09..., see accessories)
- Storage baskets optional (see below)



Model ProfiLine Taurus	PLTA 0986 <sup>1)</sup>	PLTA 2086 <sup>1)</sup>	PLTA 3386 <sup>1)</sup>	PLTA 4386 <sup>1)</sup>
	PLTA 0987 <sup>2)</sup>	PLTA 2087 <sup>2)</sup>	PLTA 3387 <sup>2)</sup>	PLTA 4387 <sup>2)</sup>
Temperature range	°C: -40/-86	-40/-86	-40/-86	-40/-86
	Temperature range -30 °C down to -60 °C see separate data sheet			
Content litres (gross):	74	189	296	383
Ext. dimensions (WxDxH) mm:	555x635x885	920x695x890	1260x695x890	1560x695x890
Int. dimensions 1 (WxDxH) mm:	385x385x470(450 <sup>3)</sup> )	545x435x650 (625 <sup>3)</sup> )	880x435x650 (625 <sup>3)</sup> )	1190x435x650 (625 <sup>3)</sup> )
Int. dimensions 2 (WxDxH) mm:	—	200x435x400 (375 <sup>3)</sup> )	200x435x400 (375 <sup>3)</sup> )	200x435x400 (375 <sup>3)</sup> )
Height at open top mm:	1480	1500	1500	1500
Baskets optional (max. quantity) :	4 (type A)	7 (type B)	13 (type B)	16 (type B)
Weight kgs:	53	64	88	98
Mains connection :	< 1/N/PE ~ 230 V 50-60 Hz >			
Shipping dimensions (WxDxH) mm:	680x640x1160	1016x756x1058	1355x755x1118	1655x755x1118
Shipping weight kg:	83	104	114	132
Refrigerant :	Mix	Mix	Mix	Mix

## Accessories

## Cat. No.

ProfiTec Temperature Monitoring and Recording System (see separate brochure).

GPTEC4A

ProfiCaller telephone dialler.

on request

Pt-100 temperature sensor, additionally installed for external temperature recording.

ZXX2-020-2L

CO<sub>2</sub> back-up system, free-standing.

ZXX2-093

Facilities for customer connection of CO<sub>2</sub> back-up system.

ZPLTA2-094

Ex-Version „Interior free of ignition sources.“

ZPLTA1-070

Transport carriage with 4 swivel castors (for PLTA 09...).


ZPLTA5-21-09xx

Storage basket (type A), 192x384x190 mm (WxDxH).

ZXX4-084

Storage basket (type B), 220x430x200 mm (WxDxH).

ZXX4-085

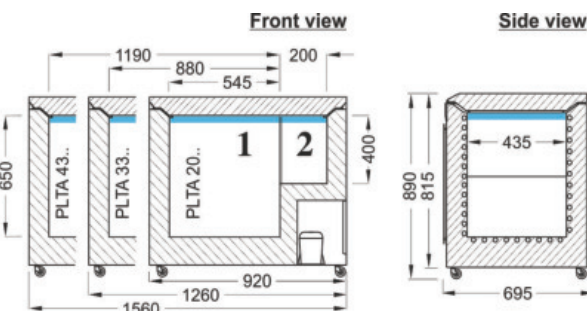


<sup>1)</sup> Models PLTA ..86 with integrated data logger.

<sup>2)</sup> Models PLTA ..87 without integrated data logger.

<sup>3)</sup> The heights in brackets apply when the supplied internal covers are used.

## Storage sets with matching vertical racks made of stainless steel



## Number of racks when fully equipped



Type of box  
**ALPHA Box**  
**BRAVO Box**  
**EPPI® Box**

50 mm



Type of box  
**ALPHA Box**  
**BRAVO Box**  
**EPPI® Box**

75 mm



Type of box  
**ALPHA Box**  
**BRAVO Box**  
**EPPI® Box**

100 mm



PLTA 09..


4 or 5



Cat. No.

TA50-08AN  
TE50-08AN  
TE50-08AN

on request



PLTA 33..

18



Cat. No.


TA50-11AN  
TE50-11AN  
TE50-11AN

3



Cat. No.

TA50-06AN  
TE50-06AN  
TE50-06AN

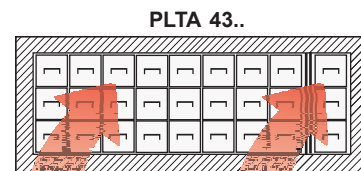

PLTA 43..

24



Cat. No.

TA50-11AN  
TE50-11AN  
TE50-11AN

3



Cat. No.

TA50-06AN  
TE50-06AN  
TE50-06AN

11

7

5

1

TA75-07AN  
TB75-07AN  
TE80-07AN

TA75-04AN  
TB75-04AN  
TE80-04AN

TA100-03AN  
TE102-03AN  
TE102-03AN

TA100-03AN  
TE102-03AN  
TE102-03AN

6

4

3

3

TA75-07AN  
TB75-07AN  
TE80-07AN

TA75-04AN  
TB75-04AN  
TE80-04AN

TA100-03AN  
TE102-03AN  
TE102-03AN

TA100-03AN  
TE102-03AN  
TE102-03AN

11

7

5

1

TA75-07AN  
TB75-07AN  
TE80-07AN

TA75-04AN  
TB75-04AN  
TE80-04AN

TA100-03AN  
TE102-03AN  
TE102-03AN

TA100-03AN  
TE102-03AN  
TE102-03AN

6

4

3

3

TA75-07AN  
TB75-07AN  
TE80-07AN

TA75-04AN  
TB75-04AN  
TE80-04AN



TA100-03AN  
TE102-03AN  
TE102-03AN

TA100-03AN  
TE102-03AN  
TE102-03AN



# Inventory Systems for Freezers and Refrigerators

2019 / 2020

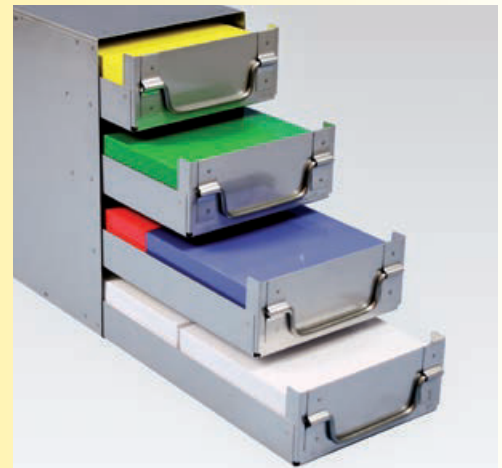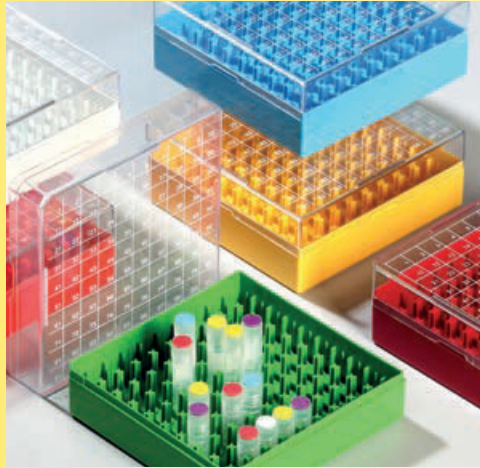

Online Information  
[www.Kryobox.de](http://www.Kryobox.de)  
[www.EPPibox.com](http://www.EPPibox.com)



## EPi® 45 / 9x9 • height 45-53 mm variable

9x9 divider holds for 81 tubes up to 12.5 mm Ø. With alphanumeric ID code on all 4 sides. (See also page 12: KEB45.. with ID code in contrasting colour).

Cat. No.	Colour	Cat. No.	Colour
KEL45-V81NA	natural	KEL45-V81YE	yellow
KEL45-V81NY	neon-yellow	KEL45-V81BU	blue
KEL45-V81NB	neon-blue	KEL45-V81GR	green
KEL45-V81NG	neon-green	KEL45-V81RE	red
KEL45-V81NP	neon-red/pink	KEL45-V81VT	violet
KEL45-V81NO	neon-orange	KEL45-V81BL	black
KEL45-V81WH	white	KEL45-V81BB	black/black*

\*black/black: Lower half and lid black for light-sensitive samples

Matching Racks

Vertical Racks  
page 39

Horizontal Racks  
page 40-41

Drawer Racks  
page 42-43

Upright Bins  
page 47



## EPi® 50 / 9x9 • height 53 mm fix

9x9 divider holds for 81 tubes up to 12.5 mm Ø. With alphanumeric ID code on all 4 sides. (See also page 14: KEB50.. with ID code in contrasting colour).

Cat. No.	Colour	Cat. No.	Colour
KEL50-C81NA	natural	KEL50-C81YE	yellow
KEL50-C81NY	neon-yellow	KEL50-C81BU	blue
KEL50-C81NB	neon-blue	KEL50-C81GR	green
KEL50-C81NG	neon-green	KEL50-C81RE	red
KEL50-C81NP	neon-red/pink	KEL50-C81VT	violet
KEL50-C81NO	neon-orange	KEL50-C81BL	black
KEL50-C81WH	white	KEL50-C81BB	black/black*

\*black/black: Lower half and lid black for light-sensitive samples


Matching Racks

Vertical Racks  
page 39

Horizontal Racks  
page 40-41

Drawer Racks  
page 42-43

Upright Bins  
page 47

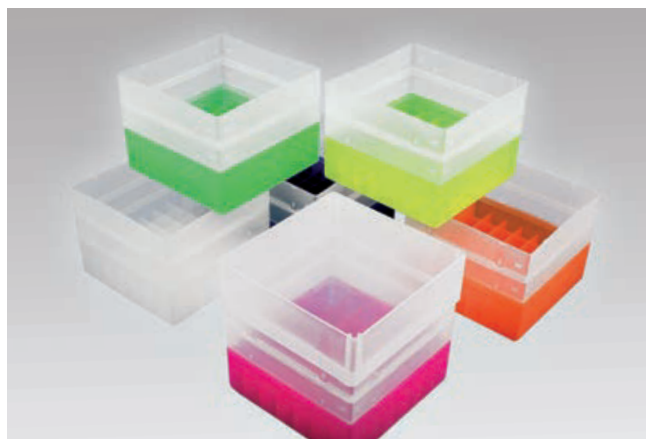

## EPi® 128 / 7x7 • height 128 mm fix

Inner height 125 mm. 7x7 divider holds for 49 tubes up to 17 mm Ø. Without ID code. (See also page 34: KEB128-CO49..).

Cat. No.	Colour	Cat. No.	Colour
KEA128-C49NA	natural	KEA128-C49YE	yellow
KEA128-C49NY	neon-yellow	KEA128-C49BU	blue
KEA128-C49NB	neon-blue	KEA128-C49GR	green
KEA128-C49NG	neon-green	KEA128-C49RE	red
KEA128-C49NP	neon-red/pink	KEA128-C49VT	violet
KEA128-C49NO	neon-orange	KEA128-C49BL	black
KEA128-C49WH	white	KEA128-C49BB	black/black*

\*black/black: Lower half and lid black for light-sensitive samples

Matching Racks

Vertical Racks  
page 39

Horizontal Racks  
page 40-41

Drawer Racks  
page 46

Upright Bins  
page 47




## Our Speciality:

### Drawer racks in German top quality.

Useful for EPi 45 + 50 and all boxes up to external dimensions 133x133x53mm (WxDxH). Base of drawers closed. With folding handle. Width 140 mm. With and without safety stop. See also page 43.

Cat. No.	Bays Depth x Height	Dimensions DxH (mm)	With/Without Safety Stop
SE50-44NBOV	4 x 4	567x231	without
SE50-44NBMV	4 x 4	567x245	with
SE50-45NBOV	4 x 5	567x288	without
SE50-45NBMV	4 x 5	567x306	with
SE50-46NBOV	4 x 6	567x346	without
SE50-46NBMV	4 x 6	567x367	with



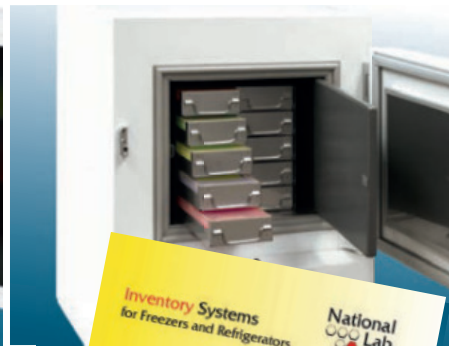

All rights and changes reserved - © 2015 Copyright by National Lab. Reg: LAB-KAT-EN-150615



**National Lab GmbH**  
**Refrigeration Technology**

Grambeker Weg 157  
D-23879 Moelln

Tel.: +49 45 42/84 91-70

Fax: +49 45 42/84 91-71

E-mail: [LabSales@NationalLab.com](mailto:LabSales@NationalLab.com)

[www.NationalLab.com](http://www.NationalLab.com)

