



Advanced
Cyclone
Systems

Particulate Matter
Emission Control
& Air Dedusting

Hurricane & ReCyclone[®] Systems

Advanced Cyclone Systems (ACS)

Towards total particle capture with optimized cyclone systems

ACS is a company exclusively dedicated to the development and supply of the most efficient cyclone systems worldwide.

ACS Focus

We focus on **particulate matter (PM) emission control (EC)** in boilers, furnaces and dryers.

We also work on enhancing **powder recovery (PR)** in pharmaceutical, food and chemical processes.

ACS Mission


Achieving particle capture **exclusively with cyclones** by continuously researching and innovating, freeing the client from the costs and problems of **Electrostatic Precipitators (ESPs) and Bag filters (BF)**.

ACS Approach

We work in close cooperation with our clients, designing customized cyclones that solve their filtration problems. Unlike most cyclone providers, we give **strict guarantees of emissions and efficiency**. That's why ACS has been the chosen company for over **170 projects in 34 countries** all over the world.

ACS Cyclones

ACS cyclone systems contradict the general thinking that cyclones are inefficient powder collectors. **Hurricane** cyclone geometries, with the possibility of recirculation (**ReCyclone Systems**) have proven to be an alternative to ESPs and BFs in numerous plants all over the world to comply with strict limits, reaching emissions as low as $30\text{mg}/\text{Nm}^3$.

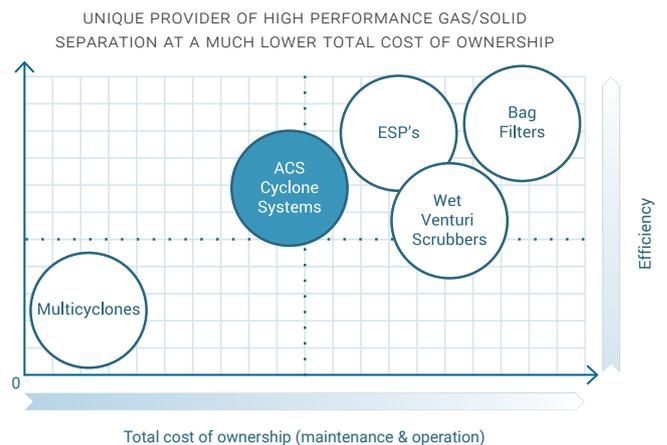

Why are our cyclones better?

We are a **specialized scientific knowledge** in particle agglomeration modeling (PACyc) and numerical optimization in partnership with the Engineering Faculty of Porto (FEUP) where we run a pilot system for R&D.

The revolutionary concept of **particle agglomeration** is essential to explain how cyclones really work and, consequently, to optimise them. The outcome of our research is not an universal solution, but a set of very different cyclone families and systems serving particular client needs and customizable for each given application.

Particulate Matter Emission Control & Air Dedusting

A problem common to many industries


Application Fields

| |
|---|
| Biomass and Coal Combustion |
| Biomass Dryers |
| Pyrolysis, Incineration and Gasification |
| Fuel Oil Combustion |
| Clinker Cooler and Pre Heater Dedusting |
| Steel and Ferroalloys |
| Calcination Processes |
| Air Caption & Dedusting |
| Glass & Ceramic Furnaces |
| High Temperature Separation Processes for Energy Recovery |

Particulate matter (PM) emission control is a common problem in industries that operate **boilers** or **incinerators** for **energy production**, or **furnaces, kilns** and **dryers** for the **manufacturing of products**, such as **ceramics, cement** or **pellets**.

Complying with stack emission limits, avoiding the carry through of particles to downstream processes or **purifying ambient air**, are the main motivations for clients to **reduce PM emissions**.

Main dedusters and drawbacks



Multicyclones | Problem: Low Efficiency

Industrial cyclones, such as multicyclones, are, in terms of their robust construction, absence of moving parts and general application, the preferred technology for particle collection in industrial boilers and furnaces.

Nevertheless, cyclones are no more an option to comply with emission limits in most countries, due to its relatively low efficiency, particularly for small particles (volume-based particule size <10µm).



Bag & Ceramic Filters | Problem: O&M costs

Bag Filters (BFs) are financially affordable and very efficient (> 99.9 %), but can be very maintenance demanding in the presence of high temperature due to frequent changing and cleaning of filter elements. Apart from these operational costs, filters are frequently attacked by glowing particles released from harsh combustion processes, such as in biomass boilers, which heavily increase emissions. The ceramic filter solution is more expensive and costly to operate. In drying applications, filter clogging is a frequent problem due to high moisture.



ESPs and WESPs | Problem: High Investment

ESPs are robust equipments and very effective for a given range of dust resistivity. However, efficiency frequently drops outside that range as a consequence of temperature changes. In applications with risk of explosion, such as drying of biomass, WESPs or Venturi Scrubbers are an alternative solution, though at the cost of secondary wet pollution. As with BFs, ESPs require to be operated by trained and specialized personel. Ultimately, ESPs' and WESPs present and future high investment costs are out of reach for many companies.

ACS Solution: Very high efficiency cyclones complying with strict emission guarantees

About Hurricane Cyclones

ACS numerically optimized cyclones

hurricane

How can cyclones be improved?

Since the early 1900's, cyclones have been mostly designed and improved by empirical means, due to the difficulty of building a good prediction method that handles with the modeling complexity related with multiphase and highly turbulent flows. Computerized Flow Dynamics (CFD) can be used for partial cyclone optimization but it is still incomplete for full cyclone optimization, due to the very large computational burden associated with highly vortical, assymetrical and multiphase flows with polydispersity. Sub-optimization of cyclones, and notably low collection efficiency result from the fact that **particle agglomeration in cyclones** has been disregarded until present days.

What is ACS solution?


Near 200 projects implemented in the past 7 years, helped ACS develop a complete line of very different **hurricane cyclone** families for each different need, considering how inter-particle agglomeration / clustering affects collection efficiency. From coarse particle pre-separation proportioned by compact and low pressure drop cyclones, such as the **SD and DX lines**, to fine particulate capture with high-end geometries such as the **EX and MK**, ACS provides solutions for a wide range of industrial cases, being able to reach emissions comparable to ESPs (down to less than 30mg/Nm³).

Particle Agglomeration and Numerical Optimization

ACS research team has been investigating this phenomenon since its foundation. Several related technical and scientific articles were published, among which the **"Impact of particle agglomeration in cyclones" (Chemical Engineering Journal 162 (2010) 861–876)**". This knowledge has helped ACS build very accurate models of efficiency prediction, capable of explaining why sub-micrometer particles are often captured with much higher efficiency than expected. Indeed, particles tend to form bigger agglomerates (clusters) much easier to collect than the original particles. Agglomeration increases in the **presence of wide particle size distributions, long residence times in the cyclone and high inlet particle concentrations**. This knowledge has been incorporated in ACS numerical simulation tool, combining a sophisticated stochastic algorithm with a classical numerical model to predict cyclone performance: **the PACyc (Particle Agglomeration in Cyclones) model**.

Creating multiple cyclones for multiple needs

Thanks to the PACyc Model, and considering several economic and operation constraints (such as size and pressure loss), it is possible to **simulate millions of virtual prototypes** with numerical optimization within an affordable period. Considering this approach as the best path to obtain truly optimized cyclones, sound theories of cyclone collection and pressure loss were chosen for each process application. These numerical optimization problems have resulted in several families of cyclones, some of those patented. Indeed, different industrial cases have **different needs** for which the optimization functions to incorporate in the PACyc model may be as complex as **minimizing cost or space, subject to a minimum efficiency result**. The following cyclone families, always subject to further customization, are the result of very different client demands ACS has come across until now.

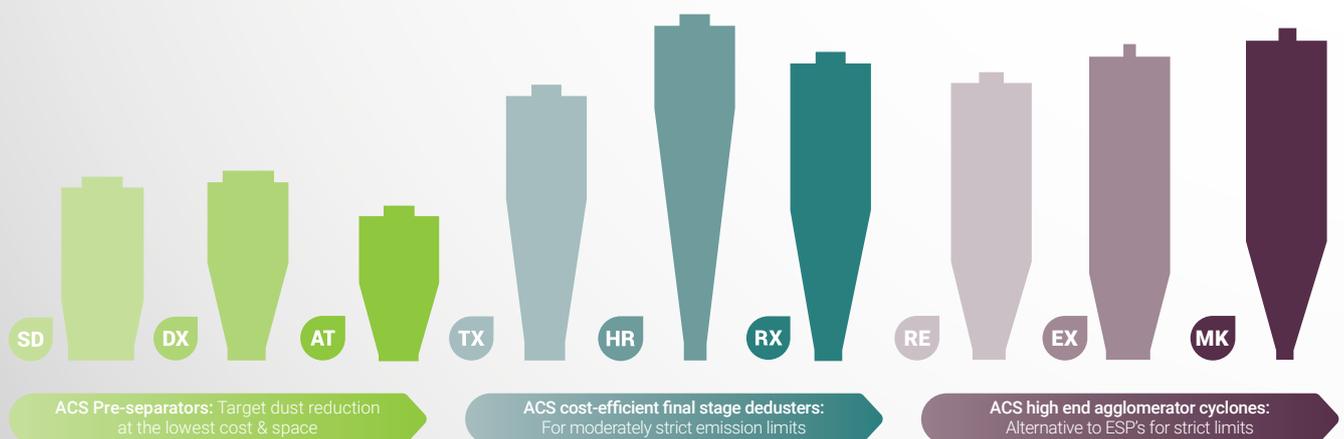

Alternative Cyclone Solutions – A Real Case Analysis: Biomass Boiler Dedusting

Designing a cyclone solution for PM reduction:


Depending on the requirements of the client ACS may design solutions that go from a compact pre-separator for sparks and silica reduction (protection of downstream equipment) to a final stage dust collector. The more efficient the solution is, the larger the number of cyclones needed to increase residence time and promote particle agglomeration with impact of space and cost. ACS will always search for the most cost efficient solution which can be upgraded with recirculation in the future. Please compare the performance of several products below.

Operating Conditions:


4MW_{th} wood chips moving grate boiler

| | |
|-----------------------------------|-------------------------|
| FUEL | Wood Chips |
| MEDIAN VOLUME BASED PARTICLE SIZE | 11µm |
| INLET CONCENTRATION | 750mg/Nm ³ |
| GAS TEMPERATURE | 180°C |
| FLOW RATE | 18 000m ³ /h |
| MOISTURE CONTENT IN FLUE GASES | 8%(v/v) |

Global Efficiency (%):

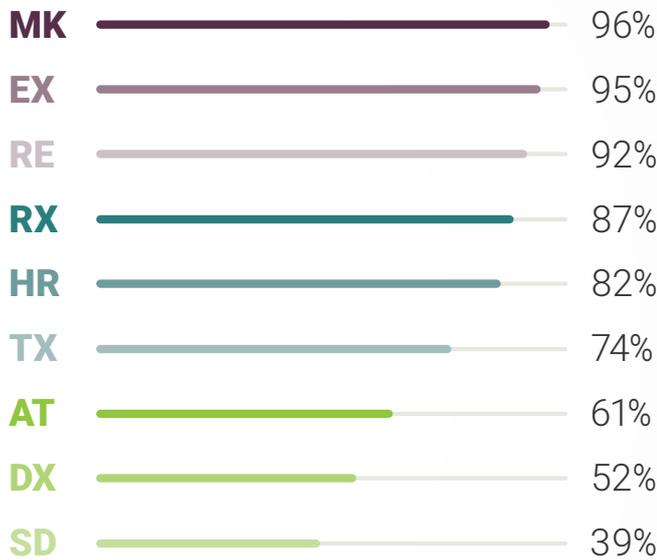


Emissions (mg/Nm³):

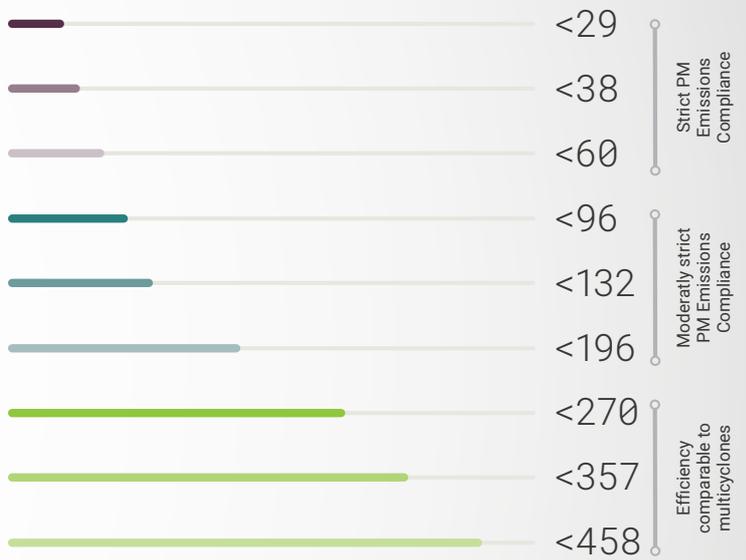

Cyclones needed (ø1000mm):

System size:

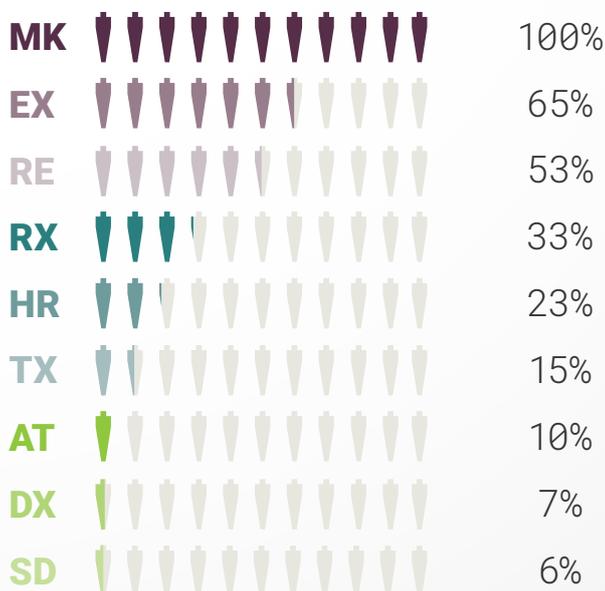

Objectives / Applications:

- The agglomerator cyclone – Maximum agglomeration
Most efficient cyclones available on the market
- Ultra high efficiency with agglomeration to compete with ESPs
- Very high efficiency cyclone with agglomeration for strict emissions
- Final stage dedusting for stricter emission limits
- Compact high efficiency cyclones for multiple applications
Half the emissions of Multicyclones
- Final stage dedusting for moderate emission limits
Better performance than multicyclones
- Enhanced Pre-Separation
Sparks & silica reduction upstream of dryers
- Improved pre-Separation for coarse and medium particle size
Alternative to axial multicyclones
- Coarse particle separation
Abrasion reduction before other cyclones and FANS

Mechanical ReCyclone® (MH)

ACS holds a patent of a recirculation system to increase the efficiency of cyclones. A mechanical ReCyclone® (**ReCyclone® MH**) is made up of a high efficiency **Hurricane** and a particle separator, placed downstream, called the “mechanical recirculator” (please see figure). **In 2016, ACS introduced more compact recirculators that can be placed on top of cyclones, exempting the need of additional footprint.**

The main purpose of the recirculators is to reintroduce the uncaptured particles into the cyclones after they have been driven to the outer walls of the recirculators by centrifugal forces. While this gas is enriched in particles, the axial gas stream exhaust to the stack is clean of particles. Recirculation is achieved through an additional fan.


Since the recirculation system only serves the purpose of dust separation (and not collection), the particles are exclusively collected in the cyclones and the need of rapping mechanisms is avoided. Systems are arranged in groups of cyclones and recirculators.

Efficiency increase

Efficiency increases due to recirculation and agglomeration of very small particles with larger ones coming directly from the process. A **ReCyclone® MH** decreases emissions of Hurricane cyclones alone by 30 to 60%. Finally recirculation control has the benefit of **handling variable process** flow rates very well.

A ReCyclone® MH is the most efficient purely mechanical collector in the market, as it further enhances efficiency of any given cyclone geometry.

RECYCLONE® MH SCHEME
Patented

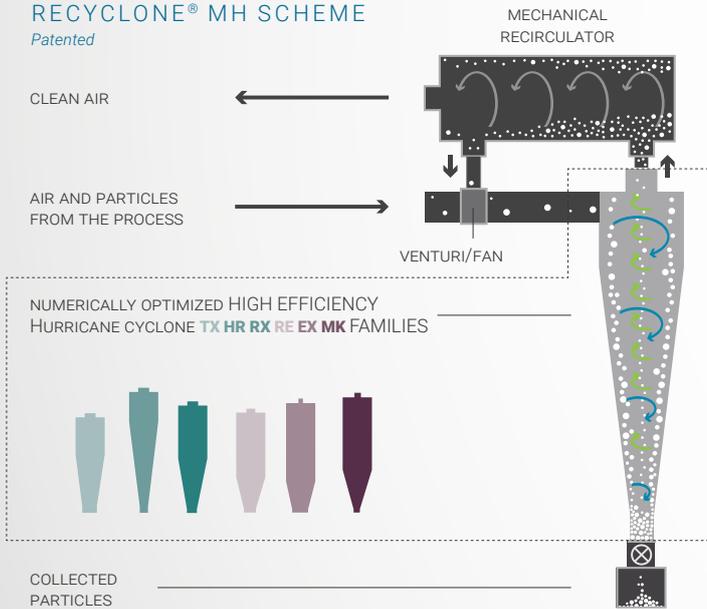

RECYCLONE® MH FEATURES

- Very high efficiencies: decreases emissions of any ACS Cyclones by [30-60%]
- Very low emissions: [15-45]mg/Nm³ is achievable for many combustion sources
- Pressure drop: [150-200] mm w. g.
- No temperature restrictions with an appropriate alloy steel or refractory selection
- Recirculation assures a reasonable velocity in the cyclones
- Robust construction with no moving parts (no rapping mechanisms)
- Near zero maintenance and downtime costs
- Low investment costs

EXAMPLES OF FINISHED AND ONGOING PROJECTS

| APPLICATION | EFFECTIVE FLOW RATE (m³/h) | TEMP. (°C) | MEDIAN PARTICLE SIZE (µm) | CYCLONES DIAMETER (mm) | PRESSURE DROP (mm w. g.) | INLET CONCENTRATION (g/Nm³) | EFFICIENCY (%) | EMISSIONS (mg/Nm³) |
|--------------------------------------|----------------------------|------------|---------------------------|------------------------|--------------------------|-----------------------------|----------------|--------------------|
| France - Wood chips grate boiler | 5 460 | 180 | 8 | 600 | 200 | 0.25 | > 86 | < 50 |
| Brazil - Biomass boiler | 101 206 | 160 | 15 | 900 | 120 | 0.45 | > 90 | < 46 |
| Indonesia - Palm shell BFB boiler | 3 595 | 230 | 30 | 700 | 190 | 5.60 | > 99 | < 50 |
| Spain - Drying of organic fertilizer | 50 400 | 40 | 35 | 1050 | 200 | 1.58 | > 97 | < 50 |

ReCyclone[®] EH System

Electrostatic ReCyclone[®] (EH)

Recent adoption of **electrostatic recirculation** in the same cyclone system has successfully proven to further reduce particle emissions, even in the [1;5] µm particle size range, assuring future regulation compliance, particularly where legal limits are very strict.

A DC high voltage is applied to the recirculator, allowing the **recirculation of very fine nanometric particles, more resistant to centrifugal forces, to the cyclone collector.** After having been separated in the recirculator and concentrated in the recirculation flow, electrically charged fine particles are at-


tracted by the cyclone walls, while agglomerating with larger particles entering the system – both promoting their easier capture.

Since particles are not captured on the walls of the recirculator, contrary to ESPs, **ReCyclone[®]** systems avoid the problem of dust accumulation and condensation.

Additionally, ReCyclone[®] EH systems have low sensitivity to either low or high dust electrical resistivity while the high voltage required power is only 10 to 15 % of that used in ESPs.

Electrostatic recirculation for fine particle capture was the winner of the Portuguese Environmental Press Award in 2008 and nominee for the European Environmental Press Award 2008.

RECYCLONE[®] (EH) SCHEME

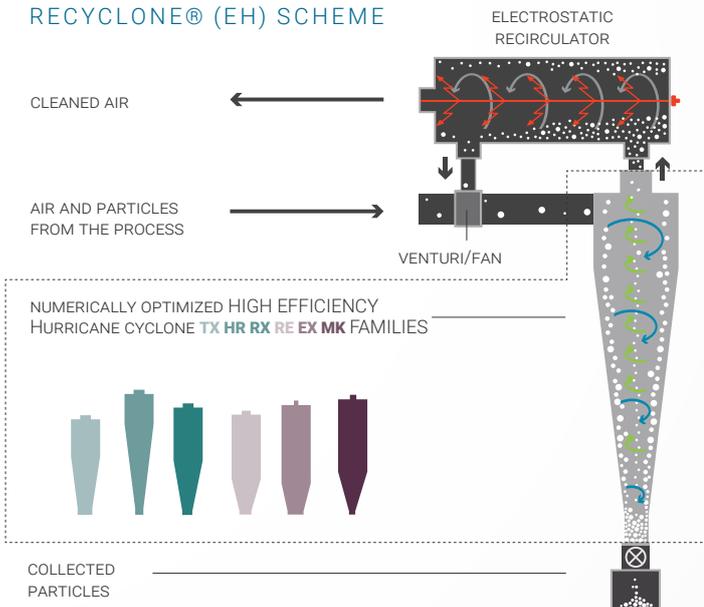

RECYCLONE[®] (EH) FEATURES

- Very high efficiencies: decreases emissions of a ReCyclone MH by [40-70]%
- "Bag Filter comparable" emissions: [5-25]mg/Nm³ is achievable for many combustion sources
- Pressure drop: [120-170] mm w. g.
- Operates up to 400°C
- Not sensitive to variable flow rates
- Robust construction with no moving parts (no rapping mechanisms)
- Low maintenance and downtime costs
- Reasonable investment costs

EXAMPLES OF FINISHED AND ONGOING PROJECTS

| APPLICATION | EFFECTIVE FLOW RATE (m ³ /h) | TEMP. (°C) | MEDIAN PARTICLE SIZE (µm) | CYCLONES DIAMETER (mm) | PRESSURE DROP (mm w. g.) | INLET CONCENTRATION (g/Nm ³) | EFFICIENCY (%) | EMISSIONS (mg/Nm ³) |
|--|---|------------|---------------------------|------------------------|--------------------------|--|----------------|---------------------------------|
| D. Republic - Wood pellet grate boiler | 25 306 | 250 | 8 | 800 | 150 | 0.30 | > 95 | < 15 |
| France - Pine residues grate boiler | 3 900 | 180 | 11 | 600 | 160 | 0.2 | > 90 | < 20 |
| Indonesia - Coal BFB boiler | 40 865 | 350 | 30 | 2000 | 170 | 5.60 | > 99.1 | < 50 |
| Turkey - MSW Gasification | 3 225 | 350 | 11.5 | 600 | 160 | 0.32 | > 94 | < 20 |

Technology comparison


Hurricane cyclones | ReCyclone MH | Recyclone EH | Other technologies

Approach to any new project

Whenever it's possible to achieve a requested emission limit or efficiency with a given optimized cyclone geometry, ACS will avoid recirculation, in order to reduce investment and operating costs (mainly power consumption of FANS). Whenever emission limits become stricter, in the future though, any hurricane family can be coupled with mechanical or electrostatic recirculation to increase efficiency. This staged investment is much easier to support than a one expenditure in a Bag Filter or ESP.

Residual emissions comparison between ACS products - Operating conditions in page 5

RESIDUAL EMISSIONS COMPARISON BETWEEN ACS PRODUCTCS

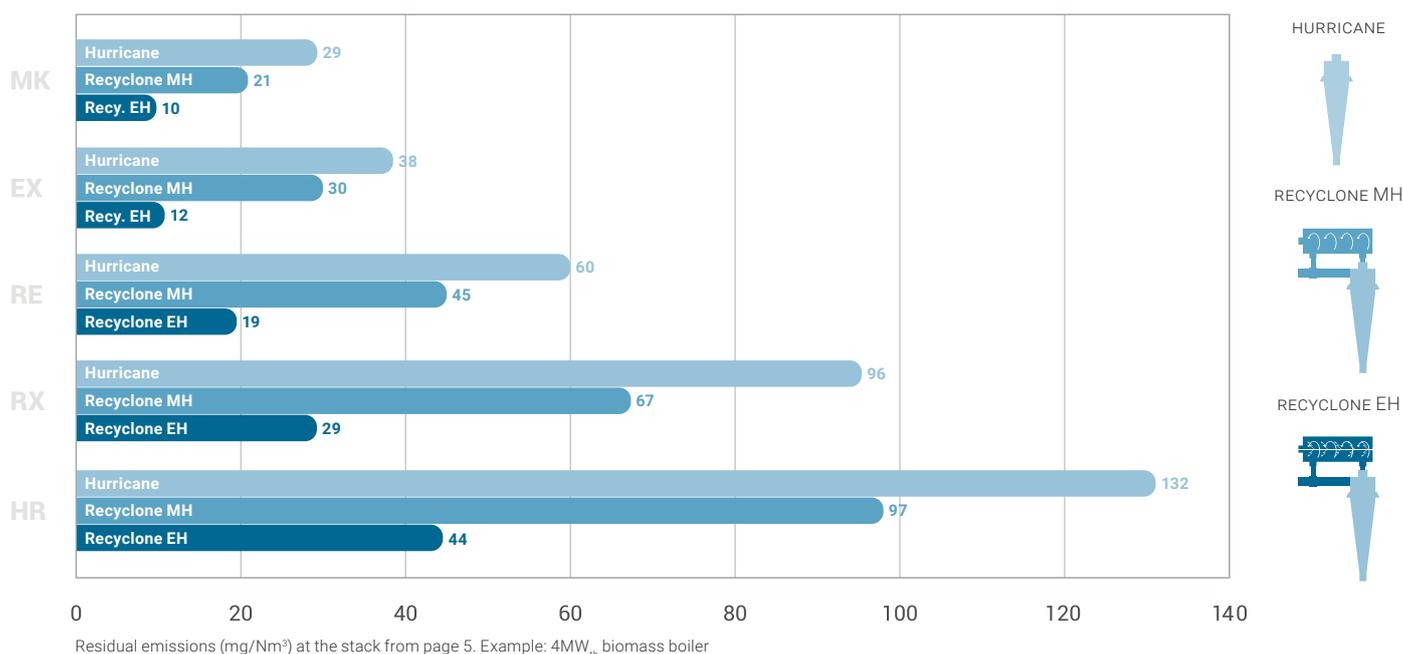

TECHNOLOGY COMPARISON BETWEEN ACS AND OTHER PRODUCTS

| Technology comparison for wood chip combustion | Multicyclones | Wet Venturi Scrubbers | Bag filters | ESP's | Hurricane systems | ReCyclone® MH systems | ReCyclone® EH systems | |
|--|---------------|--------------------------------|-------------|-----------------|-------------------|-----------------------|-----------------------|----------------------------------|
| Efficiency (%) | 50 to 80 | 89 to 93 | 98-99 + | 95 to 99 | 82 to 96 | 87 to 97 | 94 to 99 | Maximize Efficiency |
| Emissions: (depending on Hurricane collector) | > 150 | 49 to 70 | < 20 | 5 to 35 | 29 to 132 | 21 to 97 | 10 to 44 | |
| Temperature limitations (°C) | No | No | < 250 | Yes | No | No | <400 | |
| Fire risk | No | No | Yes | No | No | No | No | Universal Application |
| Resistivity sensitivity? | No | No | No | High | No | No | Low | |
| Pre-separation needed? | No | No | Always | Frequently | Unfrequent | Unfrequent | Unfrequent | |
| Consequences of electrical field failure | None | None | None | Plant shut down | None | None | Works mechanically | Minimize Total Cost of Ownership |
| Moving/replacement parts | No | No | Yes | Yes | No | No | No | |
| Relative investment costs | 20/100 | (45 to 55)/100 | 60/100 | 100/100 | (35 to 55)/100 | (45 to 65)/100 | (60 to 70)/100 | |
| Relative operating costs (Energy and Maint.) | 4/100 | 20/100 | 20/100 | 10/100 | 4/100 | 6/100 | 10/100 | |
| Future retrofitting costs | Very low | Low | Low | Very high | Very low | Very low | Very low | |
| Downtime costs | Very low | Low | High | Low | Very low | Very low | Low | |
| Comments | Dry-System | Sec. Pollution Needs Treatment | Dry-System | Dry-System | Dry-System | Dry-System | Dry-System | |

Indicated values are from page 5. Example: 4MW_m biomass boiler. Range of emissions figures depend on the type of cyclone family used

Case Study Hurricane HR cyclones for the wood panel board industry



The client Sonae Indústria is one of the largest wood-based panel producers in the world. The company faces many dust filtration problems, including the **main biomass boiler**, the **MDF/particle board dryer** and other multiple processes such as **hammer mills** and **flakers**.


The problem and solution Sonae was forced to use a natural gas hot gas generator for drying fiber, despite having the necessary amount of thermal energy available in the exhaust stream of a wood waste thermal oil heater (TOH). The problem of using the TOH laid on the emissions of ash and unburnt particulate which were carried over with the dried fiber and deposited on the final product – the wood panel boards. These were systematically rejected by quality inspections. ACS enabled using the TOH with a system comprising 60 Hurricane HR numerically optimized cyclones with $\phi 1000\text{mm}$ designed to reduce particulate under $100\text{mg}/\text{Nm}^3$ and unburnt particulate to a level which could fully eliminate quality control rejections.

Resumed Design Conditions:

| | |
|---|-----------------------------------|
| Fuel | Pine bark and wood waste residues |
| Median particle size | $10.2\mu\text{m}$ |
| Inlet dust concentration (after multicyclone) | $900\text{mg}/\text{Nm}^3$ |
| Gas flow temperature | 303°C |
| Effective flow rate | $247\,000\text{m}^3/\text{h}$ |

Output/Performance:


| | |
|--------------------|-----------------------------|
| Residual emissions | $<100\text{mg}/\text{Nm}^3$ |
| Pressure drop | 1.0kPa |
| ACS system | 60HR1000 |

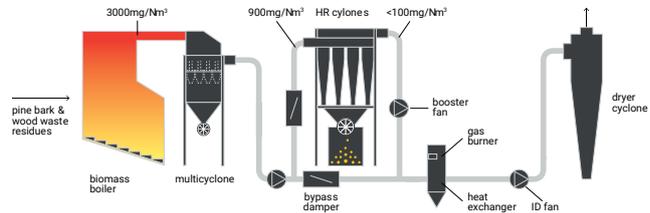

Case Study Hurricane HR cyclones to reduce PM emissions in the pellet making industry

The client Glowood produces 100,000 tons of **pellets** per year in Cercal, Alentejo, Portugal, mainly for export. As other pellet makers, Glowood faces many dust filtration problems, including a pre-separation of ash and sparks before the **drum dryer**, **dryer dust control** after the process cyclones and other applications such as the **hammer mills**.

The problem and solution Glowood runs a biomass furnace with the exhaust stream drying the feedstock in a drum dryer. Due to furnace and cyclone inefficiency, PM emissions at the stack were as high as $700\text{mg}/\text{Nm}^3$, representing losses of material and essentially an environmental problem. ACS designed a system comprising 6 Hurricane HR numerically optimized cyclones with $\phi 1550\text{mm}$, disposed in line, to reduce emissions under $50\text{mg}/\text{Nm}^3$.

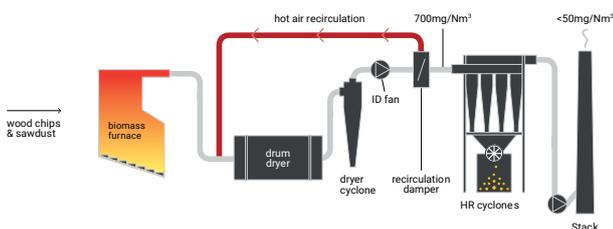


Resumed Design Conditions:

| | |
|--------------------------|---|
| Fuel | Fines of mill sawdust escaping dryer cyclones |
| Median particle size | $20\mu\text{m}$ |
| Inlet dust concentration | $700\text{mg}/\text{Nm}^3$ |
| Gas flow temperature | 87°C |
| Effective flow rate | $71\,839\text{m}^3/\text{h}$ |

Output/Performance:

| | |
|--------------------|----------------------------|
| Residual emissions | $<50\text{mg}/\text{Nm}^3$ |
| Pressure drop | 1.2kPa |
| ACS system | 6HR550 |

Case Study Hurricane RE cyclones to reduce PM emissions from a coal grate boiler

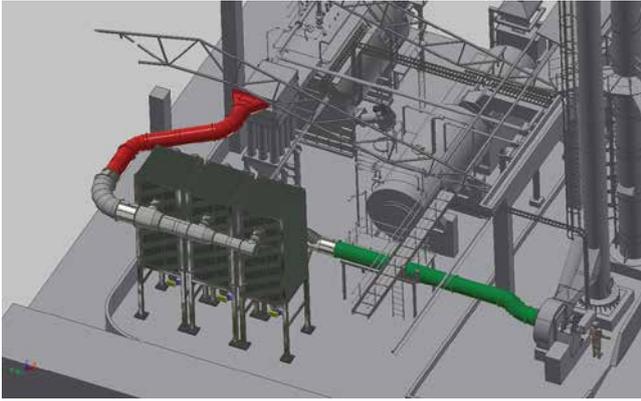

Resumed Design Conditions:


| | |
|---|-------------------------|
| Fuel | Colombian Coal |
| Median particle size | 5,5µm |
| Inlet dust concentration (after multicyclone) | 327mg/Nm ³ |
| Gas flow temperature | 155°C |
| Effective flow rate | 25 485m ³ /h |

Output/Performance:

| | |
|--------------------|-----------------------|
| Residual emissions | <50mg/Nm ³ |
| Pressure drop | 1.3kPa |
| ACS system | 12RE900 |

The client Proteicol is a Colombian company dedicated to the transformation of byproducts of animal origin directed to the animal feed industry. As in many other industries in the country, a Coal Boiler (brand JCT) is used to produce steam for the process. Coal is an unavoidable source of energy in Colombia but so is the need to reduce PM emissions, which have reached very serious levels. New regulation forces users to have their boilers under the 50mg/Nm³ threshold.


The problem and solution Proteicol runs a moving grate boiler from manufacturer JCT equipped with Multicyclones reaching emissions between 250 and 350mg/Nm³. In order to reduce the level to less than 50mg/Nm³ and considering a design flow rate of 25 485m³/h at 155°C, ACS designed a Hurricane RE system, comprising 12 RE type cyclones of ø900mm to be placed after the Multicyclones, thereby treating only the residual fines escaping to the atmosphere.

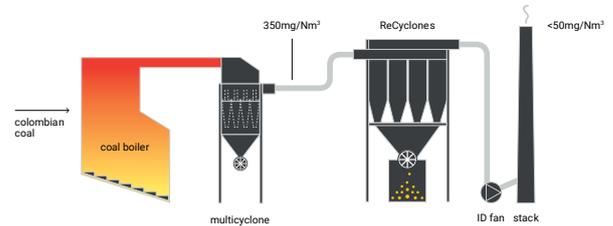

Case Study Hurricane MK cyclones to reduce PM emissions from a wood bark & forestry boiler

The client Scierie de Miremont is a French company working in the forest exploitation sector and forestry waste. ADEME – the French agency for the environment and efficient energy use – co-finances dedusting systems for biomass boilers that can operate below 50mg/Nm³ at 6% O₂. The boiler was from Austrian manufacturer Agroforst.

The problem and solution Taking advantage of being in a forest area, Miremont burns forestry waste with more than 50% moisture to produce steam and provide energy for several recent areas. To comply with emission limits imposed by ADEME, ACS designed a system of 6 Hurricane MK cyclones of ø600mm to be placed after the boiler's multicyclone and reduce the residual fine escaping to the atmosphere from 250mg/Nm³ at 11%O₂ to below 50mg/Nm³ at 11%O₂ considering a design flow of 3 200m³/h at 190°C.

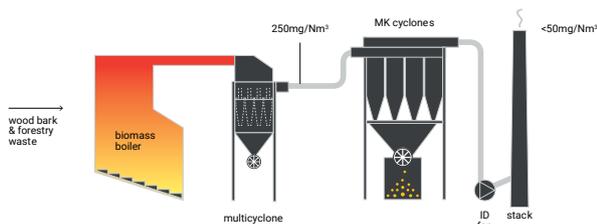

Resumed Design Conditions:

| | |
|----------------------|------------------------|
| Fuel | Bark and forest waste |
| Median particle size | 9µm |
| Inlet concentration | 250mg/Nm ³ |
| Gas temperature | 190°C |
| Flow rate | 3 200m ³ /h |

Output/Performance:

| | |
|--------------------|--|
| Residual emissions | <50mg/Nm ₃ at 11%O ₂ |
| Pressure drop | 1.2kPa |
| ACS system | 6MK600 |

Case Study ReCyclone MH HR to reduce PM emissions from a 45ton/h wood chips boiler



Resumed Design Conditions:


| | |
|----------------------|---|
| Fuel | Wood chips & forestry waste |
| Median particle size | 15µm |
| Inlet concentration | 450mg/Nm ³ at 8%O ₂ |
| Gas temperature | 160°C |
| Flow rate | 40 755m ³ /h |

Output/Performance:

| | |
|-------------------------------|--|
| Guaranteed residual emissions | <100mg/Nm ³ at 8%O ₂ |
| Pressure drop | 1.5kPa |
| ACS system | 24MH-HR1000 |

The client ComBio Energia S.A., is a company that develops, implements and manages steam, outsourcing projects for companies in Brazil. As part of its services ComBio help customers solve PM emissions to comply with local legislation. The end customer was Votorantim Metais Holding, a company amongst the five largest producers of zinc in the world that holds a leading position in Latin America with a diversifies portfolio that includes copper, lead, silver and other minerals.


The problem and solution ComBio manages the wood chips and waste forestry biomass boiler (from Dan Power) at Votorantim's Três Marias plant in Brazil. The boiler reaches emissions up to 450mg/Nm³ at 8% O₂ thanks to a multicyclone but needs to comply with levels below 100mg/Nm³ at 8%O₂. Considering a design flow rate of 101 206m³/h at 160°C ACS designed a ReCyclone MH comprised of 24 Hurricane HR cyclones ø1000mm and 24 mechanical recirculators that could guarantee compliance with local legislation.

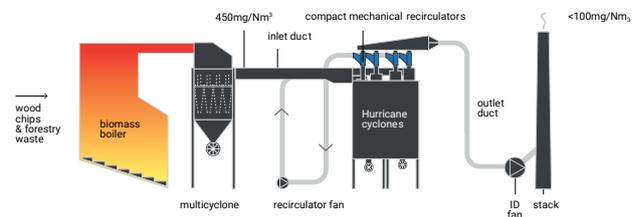

Case Study Recyclone EH-HR to reduce PM emissions from a 5MW_{th} pellet boiler

The client Leche Rica is a corporate group with more than 50 years of experience in the food industry in the Dominican Market. With strict specifications, the company guarantees products of optimum quality and freshness, while seeking to maintain leadership in productivity and service.

The problem and solution The goal of Leche Rica was to have PM emissions below 50mg/Nm³_{dry} at 11% O₂. To do so, the company needed to decrease the emissions level from the multicyclone by more than 84%. ACS made use of its particle size distribution (PSD) database collected in combination with computer simulations to design the system. After choosing the appropriate PSD, ACS proposed a ReCyclone EH system comprising 12 Hurricane HR coupled with 12 Electrostatic recirculators. The system is capable of guaranteeing emissions under 50mg/Nm³_{dry} at 11% O₂ (expected emissions are under 25mg/Nm³_{dry} at 11% O₂).

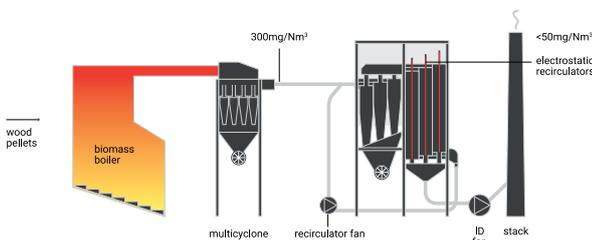

Resumed Design Conditions:

| | |
|----------------------|---|
| Fuel | Wood Pellets |
| Median particle size | 40µm |
| Inlet concentration | 300mg/Nm ³ dry at 11% O ₂ |
| Gas temperature | 250°C |
| Flow rate | 25 306m ³ /h |

Output/Performance:

| | |
|--------------------|---|
| Residual emissions | 25mg/Nm ³ _{dry} at 11% O ₂ |
| Pressure drop | 1.5kPa |
| ACS system | 12EH-HR8900 |

ACS around the world

Number of installations per country



North America



South America



Europe



Asia



Oceania



Africa



Central America



ACS Development, Commercialization and Installation of Industrial Filtering Systems | Tel: +351 226 003 268
 Rua de Vilar, 235 3ºE | Edifício Scala | 4050-626 Porto | Portugal | www.acsystems.pt | info@acsystems.pt