

Jointer

BETTER DESIGNED, BETTER BUILT



Table Raising and Lowering Mechanism

The large ground tables are balanced by durable strongsprings. They can be instantly vertical adjusted by easy reach hand lever without changing operator's position. The convenient locking knob prevents accidental table movement.



Noise Reduction Table Lips

Both tables are equipped with unique noise reduction table lips which are contoured close to the cutterhead for safe, and quieter operation. The rabbeting ledge is equipped with infeed table. By means of lowering infeed table, a maximum rabbeting depth of 3/4" will be obtained.


Jointer

J-168L

16" x 96" table

FEATURES

- Accurate Parallelogram design enables table to travel in the same arc as the cutting circle, maintaining close and uniform clearance between table lip and cutterhead for safest operation regardless of cutting depth.
- The large diameter cutterhead is ground and balanced. With accurate knives the cutterhead mounts on sealed ball bearings.
- The spring-loaded adjusting guard moves only when workpiece is being fed; the guard will automatically return to its original position upon completion of the cut. This design gives operator maximum protection by covering cutterhead at all time.
- Bridgeguard also available upon request.
- Magnetic Switch.
- 4" dia. nozzle exhaust hood.

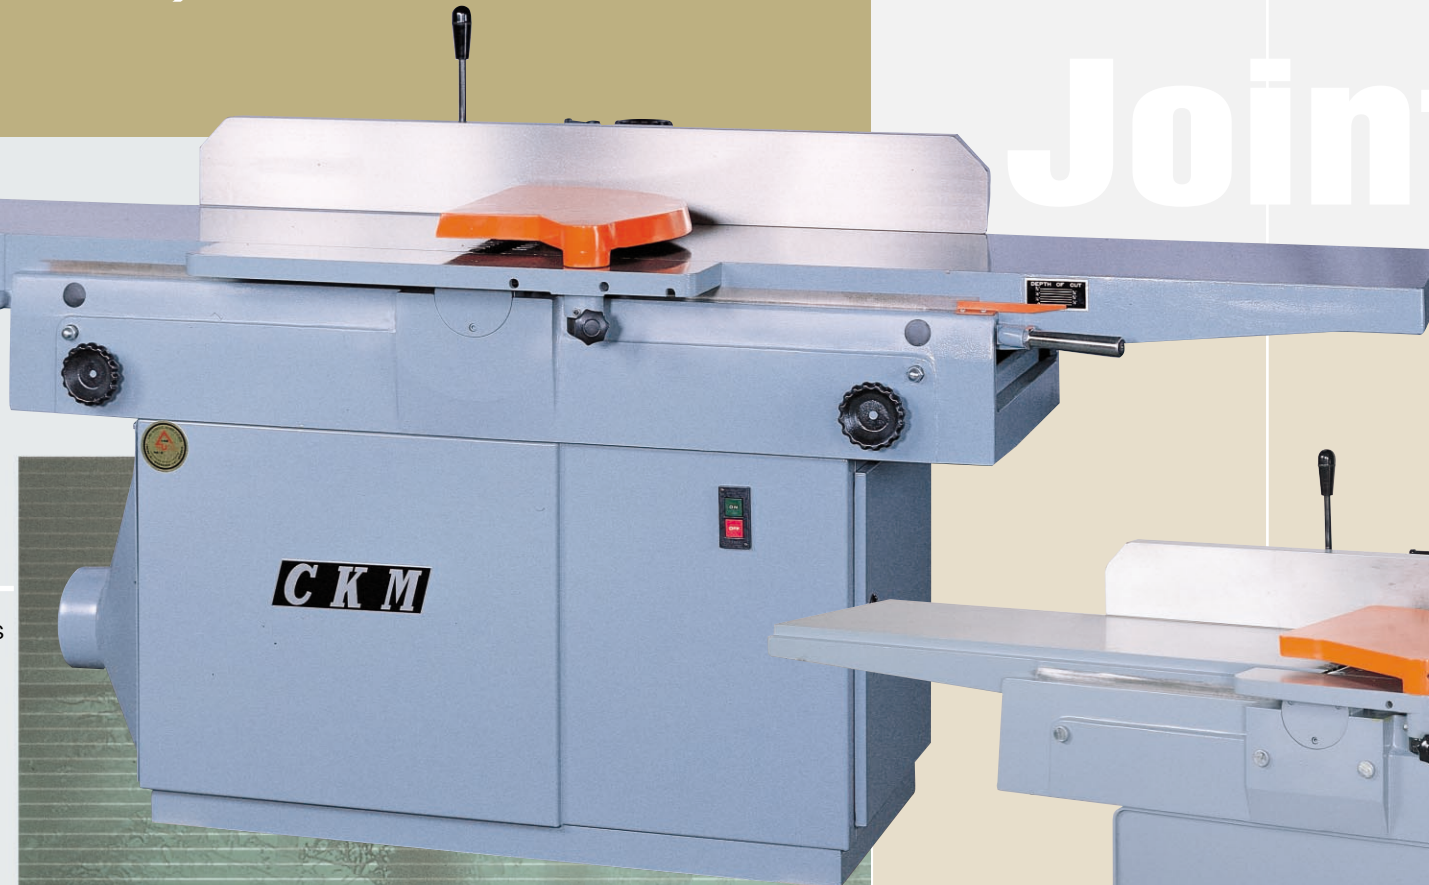

J-126L

12" x 72" table

J-127L

12" x 84" table




Large Stable Quick-set Fence

The fence has three positive stops at 45, 90 and 135 degree. The powerful lock can hold fence at any angle. It is adjustable across the table by rack operated by handwheel and can be quickly locked in any position.



Center-mounted Fence

The large 47" x 5-1/2" fence with rear guard gives operator greater protection while jointing or rabbetting close to the front of the machine.

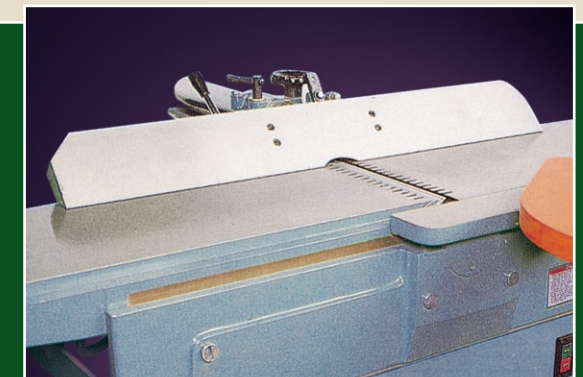

SPECIFICATIONS

MODEL	J-126L	J-127L	J-168L
Cutting capacity			
Max.width	12"(304.8mm)	12"(304.8mm)	16"(406.4mm)
Max.depth of cut	3/4"(19mm)	3/4"(19mm)	3/4"(19mm)
Table size			
Wedth	12"(304.8mm)	12"(304.8mm)	16"(406.4mm)
Length	72"(1828mm)	84"(2133mm)	96"(2438mm)
Height from floor	311/2"(800mm)	311/2"(800mm)	311/2"(800mm)
Fence			
Size(LxH)	47x51/2"(1194x140mm)	47x51/2"(1194x140mm)	47x51/2"(1194x140mm)
Tilt degree	45° (F & R)	45° (F & R)	45° (F & R)
Positive stops	45°,90°,135°	45°,90°,135°	45°,90°,13
Cutterhead			
Speed	5000R.P.M.	5000R.P.M.	5000R.P.M.
Number of knives	3	3	4
Diameter	15/16"(100mm)	315/16"(100mm)	15/16"(100mm)
Cutting circule	43/32"(140mm)	43/32"(140mm)	43/32"(140mm)
Rebeting capacity	3/4"(19mm)	3/4"(19mm)	3/4"(19mm)
Overall dimension (LxWxH)	73x36x37" 1845x910x940mm	85x36x37" 2165x910x940mm	97x40x37" 2464x1016x940mm
Net weight	660 lbs 300 kgs	740 lbs 320kgs	990lbs 450kgs
Gross weight	880 lbs 400 kgs	880 lbs 420kgs	210lbs 550kgs

The above data are not binding to details as improvements are incorporated from time to time.

* All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.

STANDARD ACCESSORIES

Cutterhead guard ;
4"dia.nozzle exhaust hood ;
adjustment tools.

OPTIONAL M-462 ACCESSORIES

Extra knives.

Jointer Series

Precise & Convenient

J-168L

16" x 96" table

J-126L

12" x 72" table

J-127L

12" x 84" table

The better designed, better built, modern looks jointer your want.
Safe & comfortable operation by many convenient safe facilities.
Quieter operating obtains highly efficient performance.
For precise jointing, rabbeting, beveling, chamfering.

CKM[®]
Quality & Service

CHENG KUANG WOOD MACHINERY WORKS CO., LTD.
NO.387, Shoei Yuan Rd., Feng Yuan, Taichung, Taiwan.
Tel: 886-4-2524 1105~7 Fax: 886-4-2527 5507
http://www.ckmtw.com.tw E-mail:ckmmail@ckmtw.com.tw

NO.269012 04-23227907
Sustainability

CHENG KUANG WOOD MACHINERY WORKS CO., LTD.

CKM[®]
Quality & Service