

FP

NUMERICALLY CONTROLLED POSITIONING STOP

*WOOD be nice.*



OMEGA

RADIAL 900 (with FP)


T 50 350 OP (with FP)



FP

NUMERICALLY CONTROLLED POSITIONING STOP


Numerically controlled length stop, available in lengths from 2 to 9 meters, ideal to satisfy the widest range of requirements, both associated to Omgatech machines or any other machine brand and kind. Simple and complete control, with a total storing capacity 10000 lines. Max. 999 Cycles and max. 99 lines per cycle. Possibility to be linked to an external PC through RS 232 serial port. USB port for programming and updates. Three available software: length stop software, programmable pusher software, specific software for cutting picture frames mouldings. The length stop can be completed with different support tables (simple sliding tables or roller tables of different widths), various stop assemblies (90° spring loaded stop, stop with gripper, 45° stop) and with mechanical and electrical connection kits.



6700

5000

4000

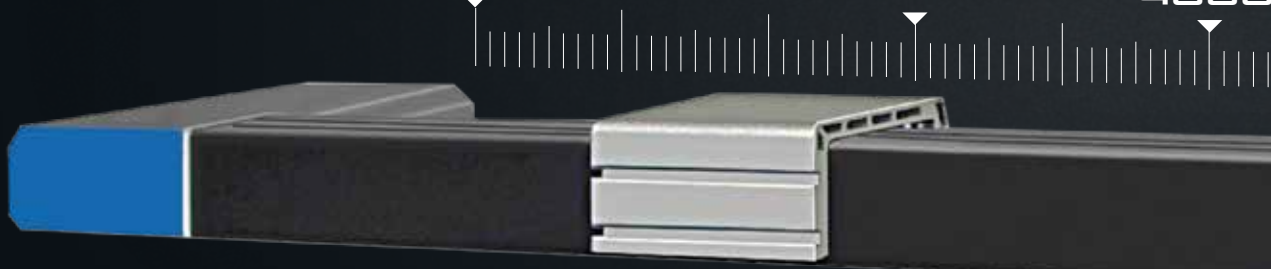

OPTIONAL



45° Bracket stop (V235 FNC)



Precision linear encoder



Double bracket stop with shock absorber: RIGHT or LEFT



Link kit to

V 235 FNC (with FP)

**OMGA**<sup>®</sup>  
WOOD be nice.



3000

2000



Mitre saw



Link kit to radial arm saw





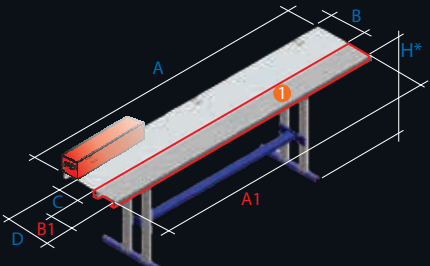
Safety kit




Label printer








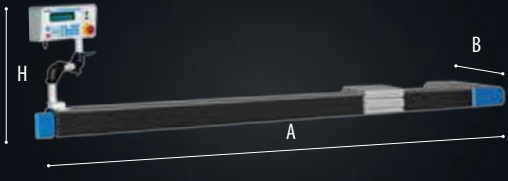


Bar code reader

	mm	FP 2000	FP 3000	FP 4000	FP 5000	FP6700
	A	2743	3743	4743	5743	7443
	B	490				
	C	600				
		495	605	715	825	1010
	A	2680	3680	4680	5680	7360
	B	345				
	C	235				
	A1	2680	3680	4680	5680	--
	B1	205				
	D	440				
	H*	* 800 - 1000				

 Table extension width

	A	2700	3700	4700	5700	7400
	B	350 MITRE SAWS				
		600 RADIAL SAWS				
	C	240 MITRE SAWS				
		490 RADIAL SAWS				
	H	* 800 - 1000				
		1100	1320	1870	2200	2400
		MITRE SAWS				
		1520	1860	2630	3040	3400
		RADIAL SAWS				

	Adjustable feet, with three preset positions.
	kg 50
	kg 70
	Feed speed 60 m/min
	1,0 kw - 110 / 230 V 10 / 5 A - 50 / 60 Hz
	Operating temperature 5° ÷ 45° C
	Humidity (without condensation) 5% ÷ 85%

 2900204548.01

**DIERREGI SRL**

VIA DELLA SCIENZA 5  
41012 CARPI (MO) - ITALY  
PHONE: +39.059.803.0103  
FAX: +39.059.803.0113  
COD. FISCALE E P.IVA:  
03601330362

**WWW.OMGA.IT**

**OMGA**<sup>®</sup>  
WOOD be nice.