

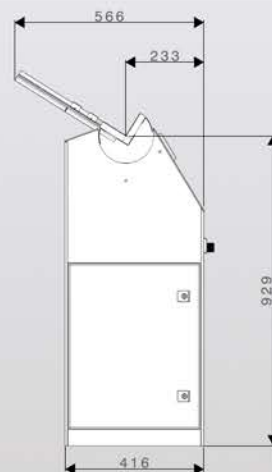
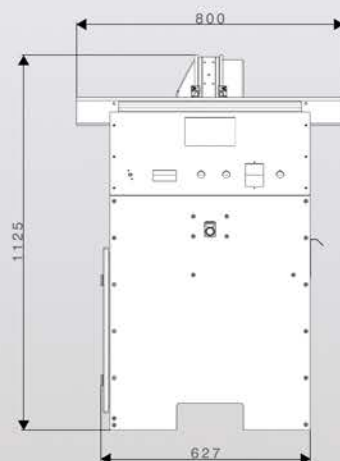


-  0 ... 5 mm
-  30° ... 60°
-  2 ... 50 mm
-  ohne Beschränkung - no limit
-  0 ... 5 m/min
-  0 ... 18.000 RPM
-  230V / 50Hz (120V / 60Hz)
-  90 kg
-  www.euracryl.com/v3



EURACRYL
EQUIPMENT FOR TRANSPARENCY



Automatische Vorschubeinheit - Automatically feed unit - Alimentador de avance automático
Alimentatore di avanzamento automatico
Alimentateur automatique

Spänekasten - Swarf box - Cajon para la viruta
Scatola trucioli - Bac à copeaux

Bedienungsfeld - Control panel
Panel de control - Pannello di controllo
Tableau de commande

Schwenkbare Fräs-/Poliereinheit - Tilting milling polishing unit - Unidad de fresado / pulido inclinable
Unità di fresatura / lucidatura inclinabile - Unité de fraisage / polissage inclinable

