SPECIFICATIONS:

Model	CFS-100
Saw motor	10 HP
Feed motor	2 Kw
Saw spindle speed	3400 r.p.m.
Feedrate	80 M/min
Maximum circular saw dia.	455 mm (18")
Bore of circular saw	30 mm
Bed height	900 mm
Minimum cutting length	300 mm
Maximum table load	25 kgs
Air compressed (Consumption)	7~9 kg/cm² (160 M³/hr)
Diameter of dust collector inlet	Ø100 mmx2
Machine weight	900 kgs
Machine dimensions (L x D x H)	1170x1210x1200 mm (w/o roller table)

Model	CFS-200A
Saw motor	10 HP
Feed motor	3.5 Kw
Saw spindle speed (50 Hz / 60 Hz)	4000 r.p.m. / 4100 r.p.m.
Feedrate	150 M/min
Maximum circular saw dia.	540 mm (21")
Bore of circular saw	40 mm
Bed height	900 mm
Minimum cutting length	300 mm
Maximum table load	40 kgs
Air compressed (Consumption)	7~9kg/cm² (200M³/hr)
Diameter of dust collector inlet	Ø150 mmx2 / Ø100 mmx1
Machine weight	1250 kgs
Machine dimensions (L x D x H)	1300x1450x1460 mm (w/o roller table)

* We reserve the right to amend any of the above specifications without prior notice.

Cutting Modes

1. Fixed length cutting

2. Sequential cutting (10 sets of cutting-sizes memory)



3. Marking lines cutting with double end trimming

4. Mixed cutting functions

A. Fixed length + Marking lines

B. Fixed length + Marking lines + optimum residual usage



C. Multiple accumulation function (CFS-200A Optional)

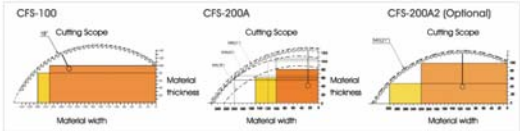

KUANGYUNG

KUANG YUNG MACHINERY CO., LTD.
283, SEC. 2, FENG SHYH ROAD, FENG YUAN DIST, TAICHUNG 42081, TAIWAN

TEL: +886-4-2522 6151 (Rep)
FAX: +886-4-2524 3251
E-mail: info@kuangyung.com.tw
http://www.kuangyung.com

1000, 03, 2011

Semi-Optimizing Cut-Off Saw Series

Semi-Optimizing Cut-Off Saw
& Crabwise Auto-Feeding Table

KUANGYUNG

CE ISO-9001
TÜV certified