


Performance cutting for high demands

Superior-quality bandsaw blades for high-quality cutting of logs in sawmill conditions.

- ensures a high productivity
- very high durability (longer cutting time between two sharpenings)
- high resistance (due to it's high content of Ni, it has a higher resistance for repetitive bonding on the flywheel without cracking)
- the bandsaw blade keeps well it's tensioning during the cutting
- lower sensibility to the technical condition of the sawing machine

S STELLITE-TIPPING



T FLATTENING



VS VARIABLE PITCH



DD DOUBLE-SAW TOOTHED FOR BIDIRECTIONAL CUTTING




PVDG DOUBLE-SAW TOOTHED FOR SAWDUST REMOVAL



width	thickness	availability
100	0,9	•
	1,1	•
110	1,1	•
	1,2	•
120	1,1	◦
	1,2	•
130	1,1	◦
	1,2	•
140	1,2	•
150	1,2	•
155,6	1,25	◦
	1,47	•
181	1,25	•
	1,47	•
206,4	1,47	•
	1,65	◦
231	1,47	◦
260,4	1,47	•
	1,65	•
311	1,83	◦

- - available
- - available for order

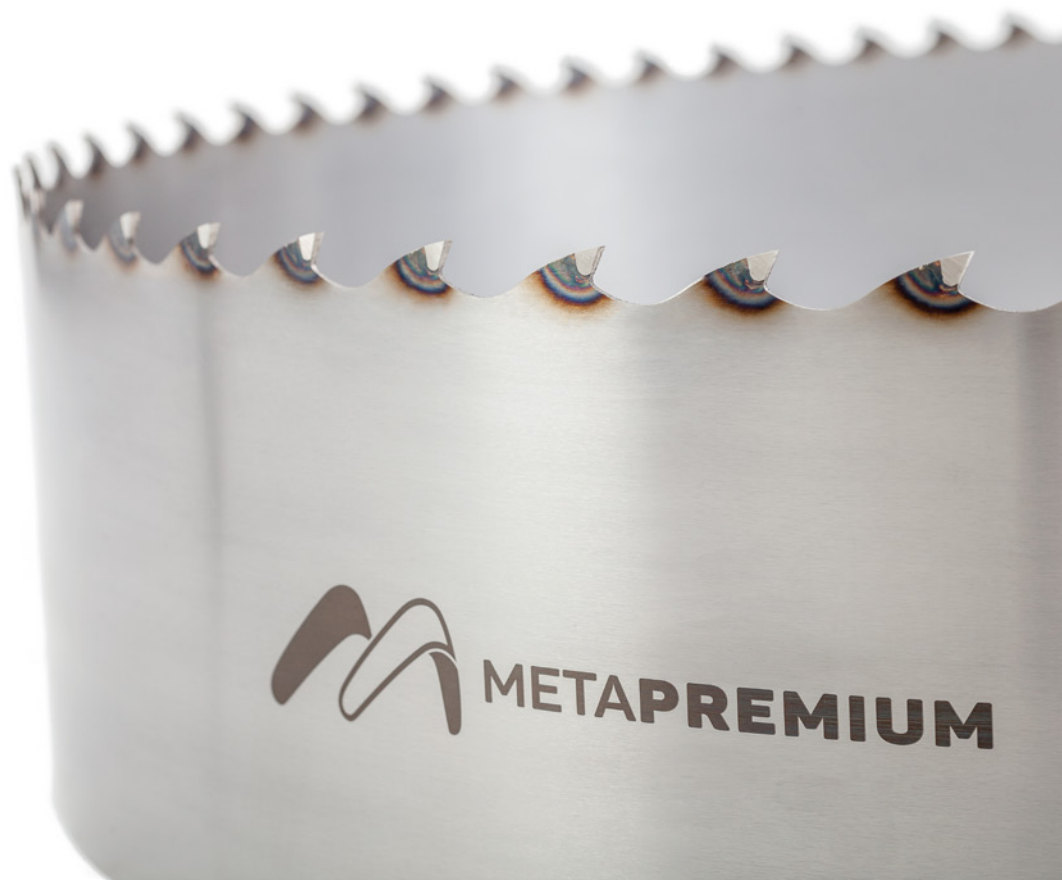

Chose your suitable bandsaw:



Performance in cutting with universal blades

Standard bandsaw blades specially designed for cutting logs efficiently in high quality conditions.



Performance cutting for high demands

Superior-quality bandsaw blades for high-quality cutting of logs in sawmill conditions.



The guaranteed precision in cutting

Bandsaw blades designed for woodworking and timber factories in order to cut quality veneer and wood slides in a highly precise and efficient way.



Bandsaw blades for mobile milling machines

SC METAMOB SRL

440122 Satu Mare, RO, Aurel Vlaicu street, nr. 102-106, T +40 261 706603, F +40 261 710313, E sales@metamob.ro

www.metamob.ro