



Silo Discharge

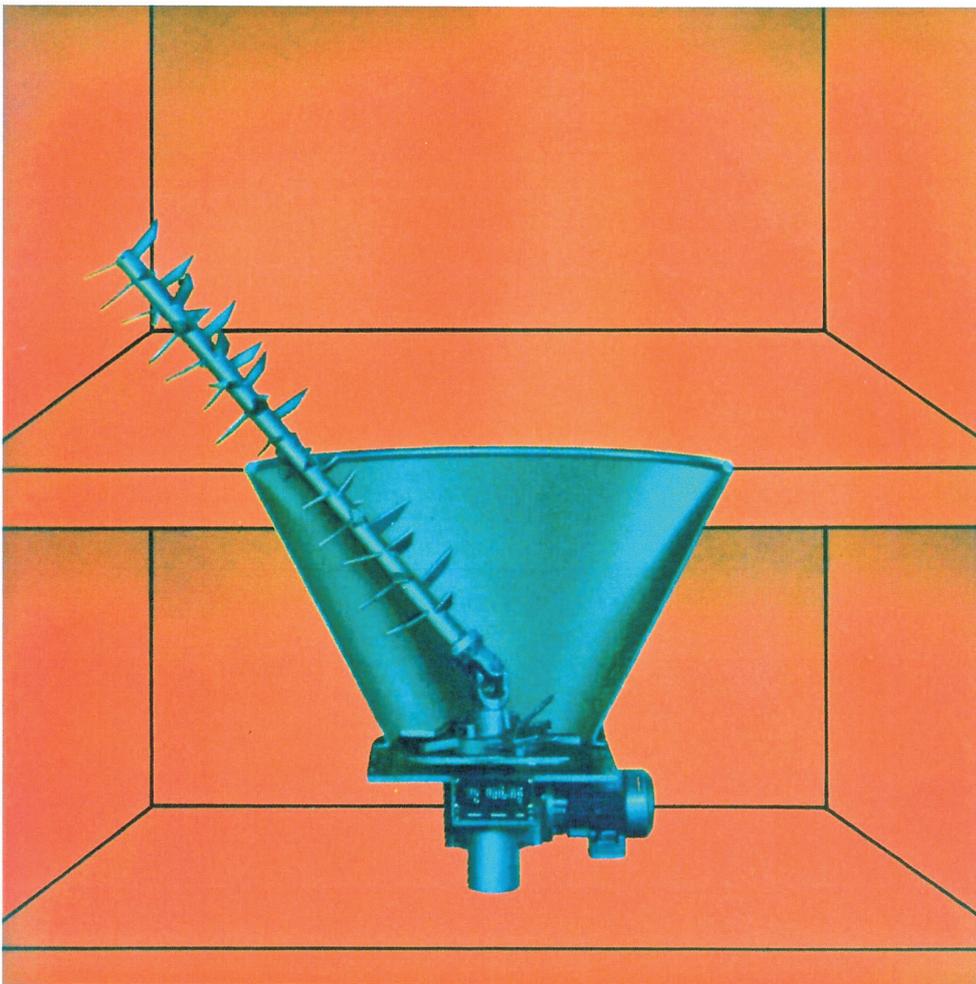

Type S 151

for automatic
firing systems

Silo Discharge Type S 151

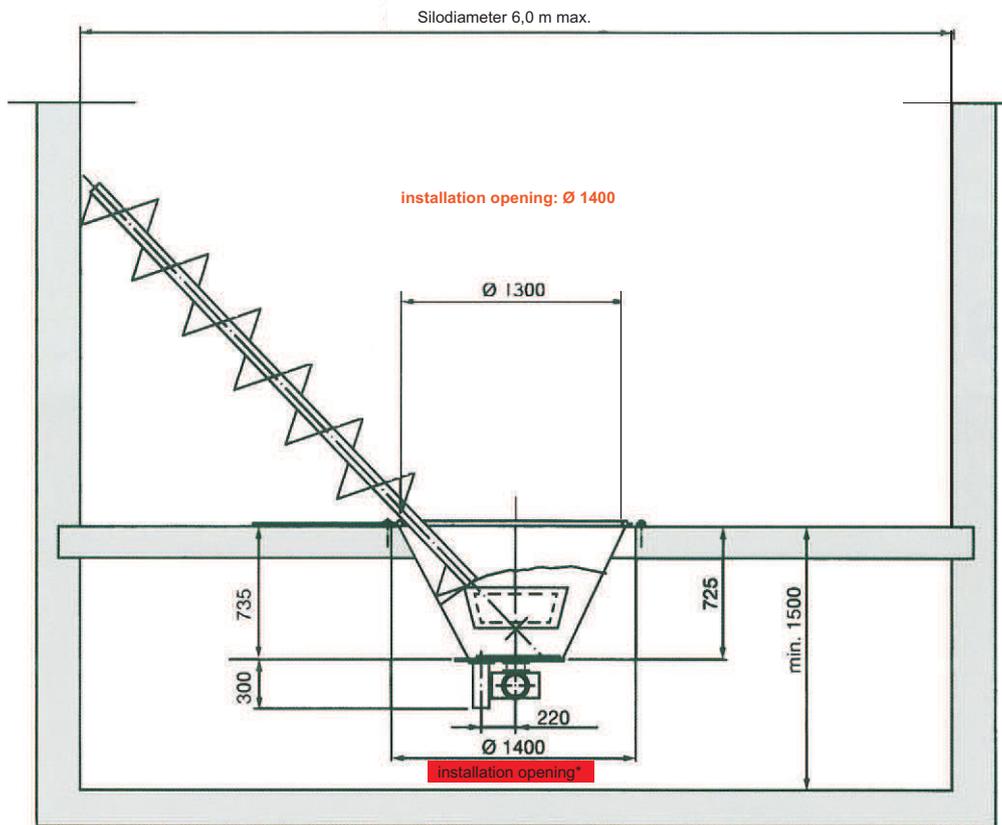

* The installation opening must be made by the customer.
The built-in funnel is bolted to the floor of the silo when the silo discharge is assembled.

■ Silo discharge type S 151 is suitable for wood shaving fuels, including chips up to 20 mm long. The thickness of the chips should not exceed 5 mm.



wood chips from wood working and processing

■ If required, the fuel can be metered with a screw conveyor after it leaves the silo discharge. With injection firing systems the screw conveyor is supplied with a variable speed gear. For other types of firing system it is sufficient to operate the drive in cycles.

Nolting Holzfeuerungsstechnik GmbH

Aquafinstraße 15
D - 32760 Detmold

Tel.: +49 (0)5231/9555-0
Fax: +49 (0)5231/9555-55

E-mail: info@nolting-online.de
Internet: www.nolting-online.de



Subject to modification without notice.

Brochure 06/13 Krö