


# REA JET

INDUSTRIAL CODING AND  
MARKING SOLUTIONS -  
MADE IN GERMANY

## REA JET HR

High-Resolution Coding and Marking System  
based on HP-Print Technology

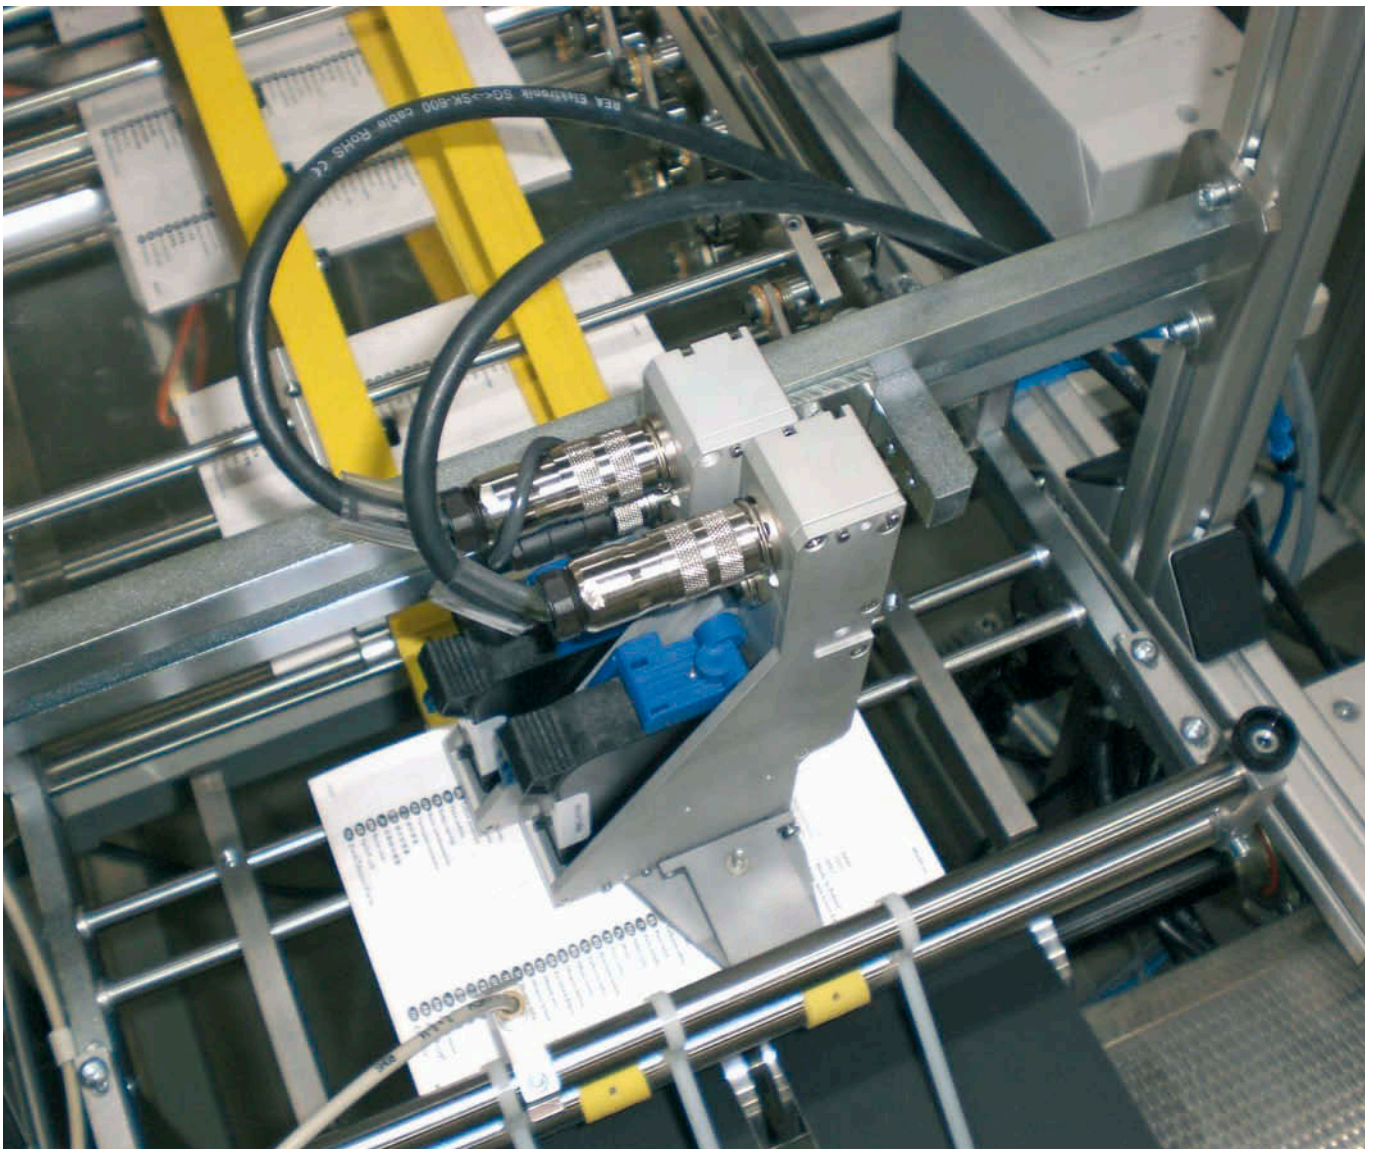

# Innovative, Maintenance-Free Product Marking: High Resolution Ink Jet Printers (HP)



The high resolution ink jet printers with HP print technology utilize the thermal ink jet technology that is trusted by millions of users of office printers. The robust stainless steel housing, the intuitive operation and well-conceived print head design make this coding and marking system suitable for unlimited industrial-strength applications. The system particularly proves its worth in the pharmaceutical,

food, wood, paper and packaging industries. For marking at a print height of 12.7 mm per cartridge. If greater print heights are required, several print heads can be cascaded. With its integrated Ethernet interface and full Unicode support, the HR print system is the system of choice for serialization tasks and track & trace projects.


## Applications:

- protection against counterfeiting and traceability
- ideally suited for serialization and track & trace applications
- high-quality code verification in a process using verifiers from REA VERIFIER (see page 16)
- for absorbent and non-absorbent surfaces
- alphanumeric texts, barcodes, 2D codes, DataMatrix codes and logos
- variable data such as date, time, counter, shift code, database contents
- highest print resolution up to 600 dpi, configurable in 16 levels


## Advantages:

- utilizes the HP thermal ink jet technology (TIJ) that is trusted by millions of users of office printers
- maintenance-free – every time you change a cartridge, you receive a new print head
- permanent storage of the various cartridge fill levels
- monitoring of cartridge locking
- highest operational reliability
- easy and intuitive operation due to central push-turn jog-dial knob
- international, due to Unicode character set and multi-voltage power supply
- XML-based data structure and communication
- state of the art interface technology, for integration into machinery and equipment
- controller in stainless steel housing with IP65 protection class
- optional accessories such as robust, easy-to-configure parallelogram for distance offset in different product positions during printing

Controller



Print Head

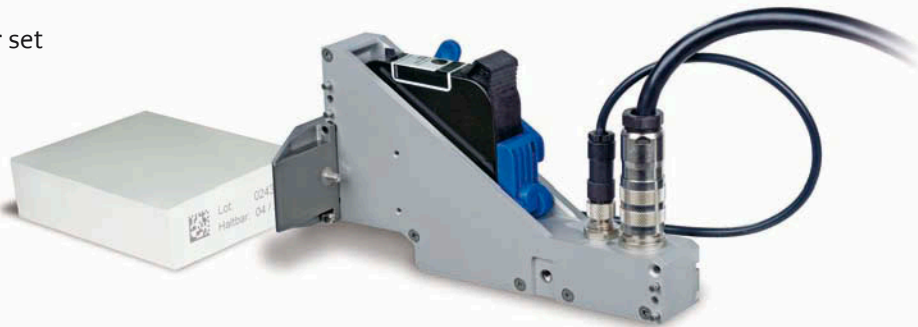

## Functions\*:

- Text-Objects: No limitation in number of objects, text length only limited by the layout length
- Objects like: date, time, working shift code, counter, bitmap, barcode, 2D-Code, max. 10 objects per type per label

## Print parameters:

- max. Print height: 25,4 mm (2 print heads, each 12.7 mm = ½")
- max. Print length: 1000 mm layout length
- Printing speeds: 30 to 306 m/min.
- vertical resolution: 300 and 600 dpi
- horizontal resolution: 60 to 600 dpi in 16 steps: 60 dpi, 100 dpi, 120 dpi, 150 dpi, 180 dpi, 200 dpi, 220 dpi, 240 dpi, 260 dpi, 300 dpi, 360 dpi, 420 dpi, 450 dpi, 480 dpi, 540 dpi, 600 dpi

## Operation:

- Display: 14,4 cm (5.7") full colour graphic display, + direct status indication with 6 LEDs
- Input: Jog dial, five menu-dependent function keys, decimal key block, four cursor keys, keys ESC, DEL, OK ONE, Help, Alt, Menu and backspace

## Communication-interfaces:

- Ethernet, USB, (RS232): included

## PLC Connection:

- Input: 6 x 24V DC/PNP (rising edge switching)
- Output: 4 x 24V DC/PNP, max. 250 mA each
- Shaft Encoder: Voltage 24V DC
- Bulk: Connection for an intelligent bulk System (max. 2 x 350 ml Ink)

## Mechanical Data (Controller):

- Width x Depth x Height: 30 cm x 28 cm x 14 cm
- Weight: 10 kg
- Environmental class: IP65

## Mains Power:

- Voltage: 95 V to 250 V AC
- Frequency: 50/60 Hz

\* The availability of the individual functions depends on the available software status of the equipment!



Marking of wood



Marking of flour bags



Cardboard box coding using DataMatrix code



Coding of plastic profile plates

# REA JET



## **REA Elektronik GmbH**

Teichwiesenstrasse 1

64367 Muehlthal

Germany

T: +49 (0)6154 638-0

F: +49 (0)6154 638-195

E: [info@rea-jet.de](mailto:info@rea-jet.de)

[www.rea-jet.com](http://www.rea-jet.com)