

## Type ZS 200N 3D

Cutting capacity at 90 °	420mm option 500mm
Cutting capacity at 45 °	295mm
Cutting height at 90 °	200mm
Cutting height at 45° tilt	140mm
Angle adjustment range	45-90-25°
Angle adjustment range for tilt	60-90-30°

## Beamworks

TigerAngle 3D for controlling the TigerStop pusher and saw angles


Cutting pattern optimising

Import function for text files and files from drawing programs

Multitool functions for controlling tools such as notchers, drills, etc.

PC with touchscreen and PC-stand

Label configuration

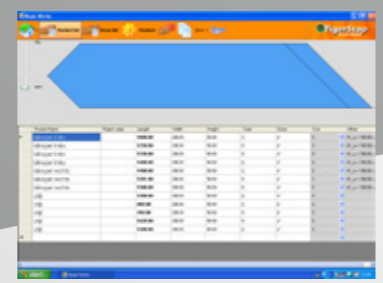


# TigerAngle



## Type ZS 170N 2D

Cutting capacity at 90 °	450mm
Cutting capacity at 45 °	310mm
Cutting height at 90 °	170mm
Cutting height at 45° tilt	115mm
Angle adjustment range	45-90-25°
Angle adjustment range for tilt (manually)	45-90-60°

### Example: TigerAngle with Graule ZS 200N and TigerStop 6.8

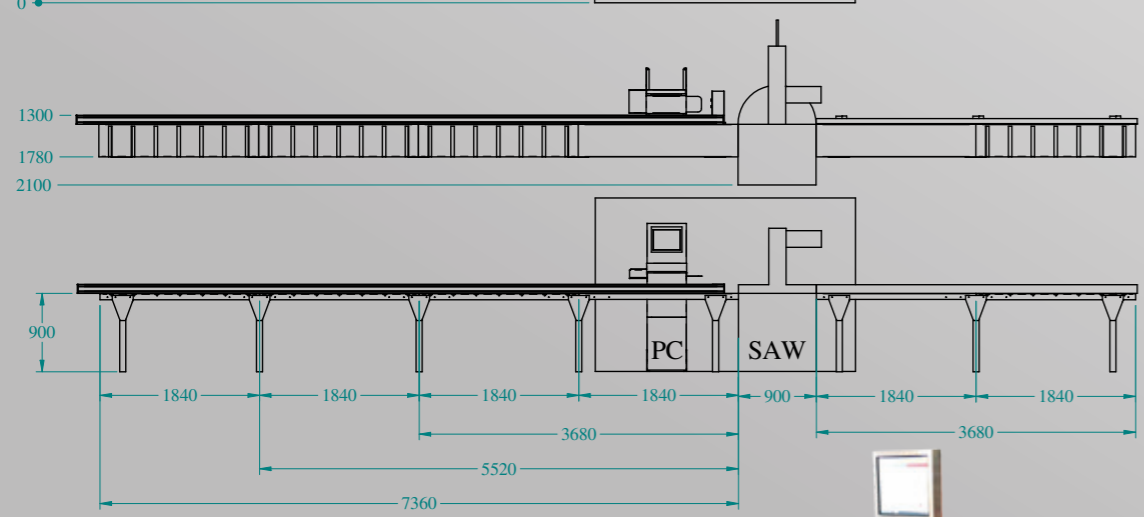

TigerAngle with hydropneumatic sawstroke with two hand start button and retractable safety hood.





# Cross cut saw for the building industry

Efficient and flexible saw  
for your wall , roof and truss components

# TigerStop®

fast and accurate...every time




# TigerAngle



Aluminium



Wood

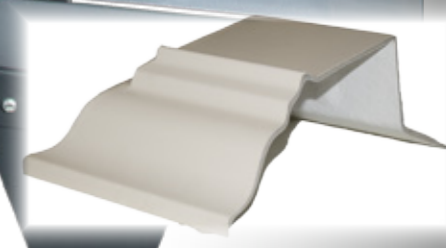

PVC




Automatic positioning  
with Tigerstop pusher system



Maximum cross-sections  
up to 200 x 420 mm (Option for 500mm)  
0,05 degrees Precision  
Timber length up to 8.5 m standard  
(Option up to 15 m)



Automatic angle adjustment  
using TigerStop servo drive

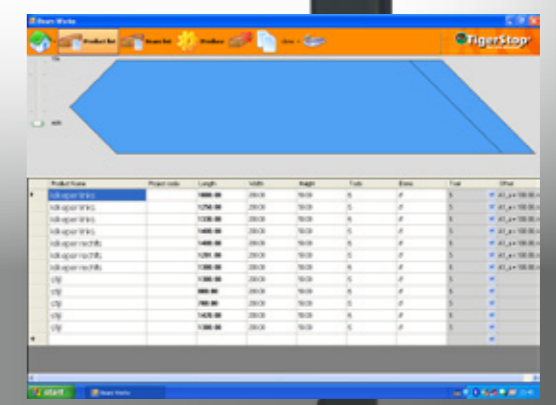

Beamworks 3D  
control for pusher and  
angle adjustment

