


Fixed Rotor Debarker for Medium-sized and Large Logs

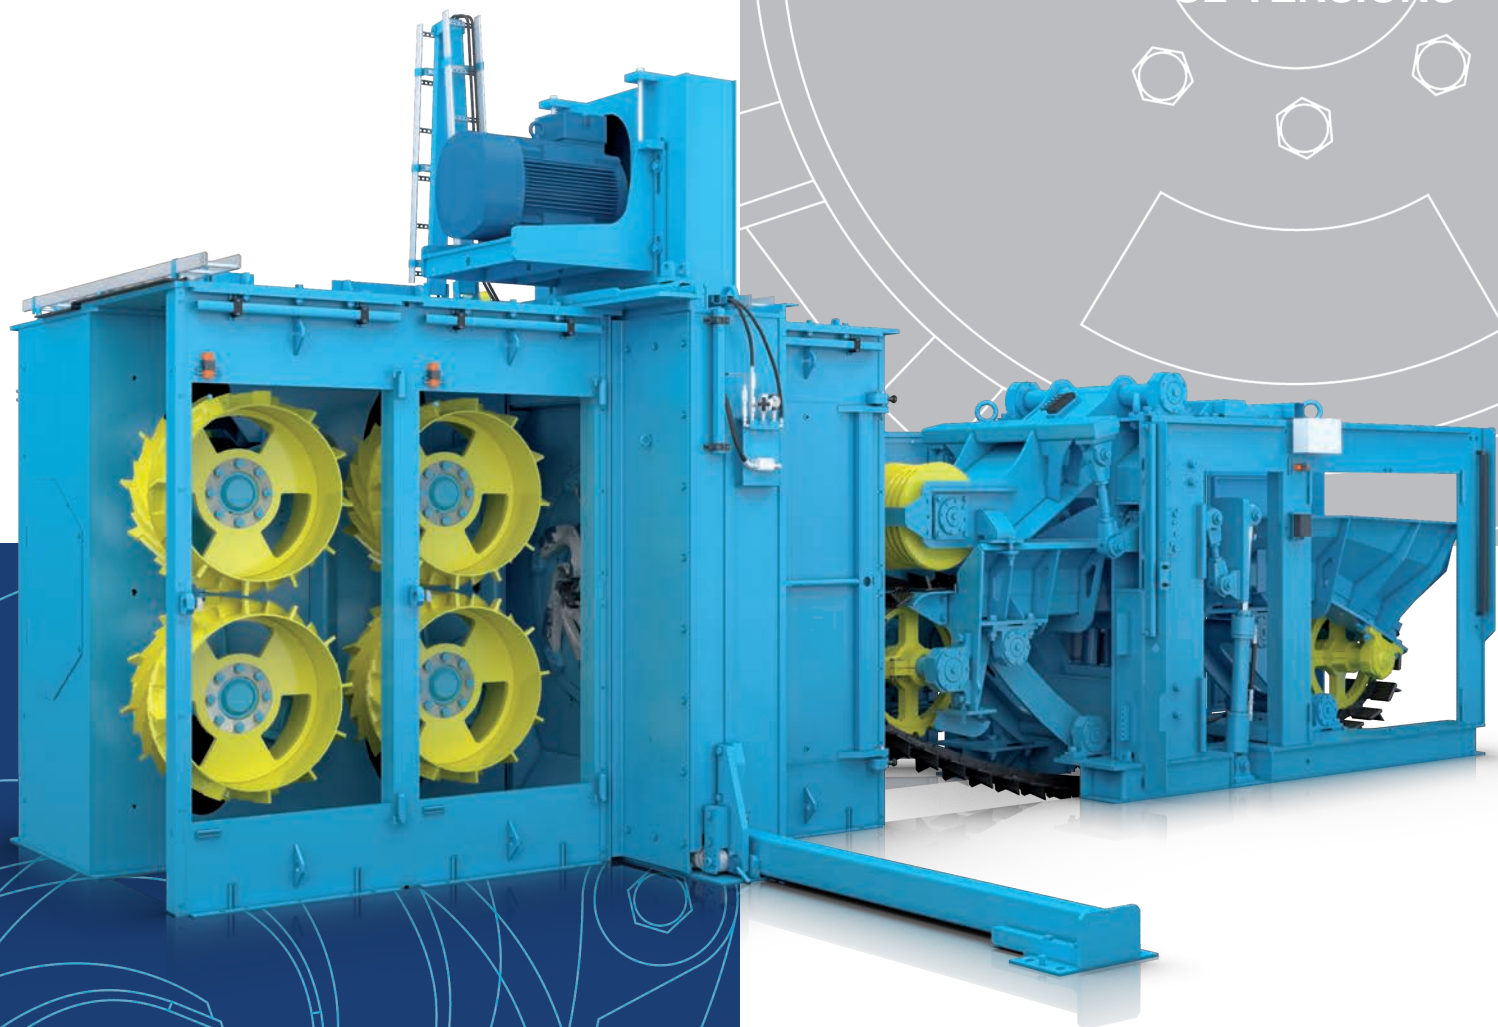



VK8062
VK8062HD
VK8082
VK8056HD
VK8068HD
VK8081HD
VK8092HD
SL-VERSIONS

VK8000-Series

Single-Rotor Debarking



debarker specialist

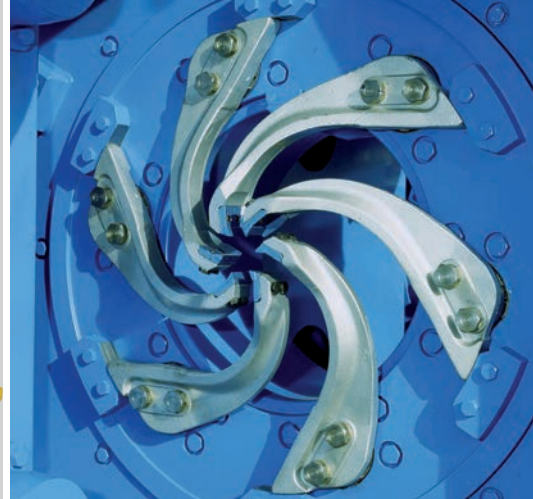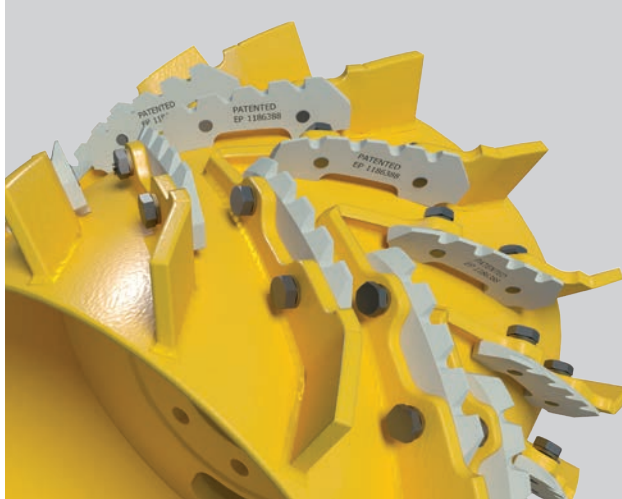

Debarker for medium-sized and large logs

- New generation VK debarker, designed for modern production needs - VK8000 with the largest available frame size (feedroll Ø 86 cm)
- Standard design with 6 feedrolls - a short log version (SL) with 8 feedrolls
- Modular construction allows step by step investment - start with one and complete with two debarking rotors and an inline butt-end reducing rotor
- Rotors with a hydraulic pull-out system - allows easy and safe maintenance

Basic or Heavy Duty equipment category

- The critical components of power transmission either in Basic or Heavy Duty (HD) category
- Secured log feeding with Basic category components in lower speeds
- HD-versions for high-speed lines - extra strong components as standard
- Two feedroll hydraulic systems available - closed circuit (Basic) or active hydraulic system (HD)

Centring infeed conveyor


- The conveyor centers logs both in vertical and horizontal and guides them smoothly between the feedrolls - minimal fibre loss
- Equipped with a hydraulic pre-opening system of the pressure roll - improves the log feeding

Feedrolls with replaceable inserts (FibreMax)

- Three insert models available: flat, and sharpened teeth or spiked
- Allows easy maintenance of feedrolls
- Better grip with no cutting effect on the log surface

Hydraulic feedroll pressure

- The closed circuit hydraulic system designed for lower speeds comes with a designated cylinder and a pressure accumulator for each roll pair - the working pressure is continuously maintained (Basic)
- High speed debarking requires the active hydraulic system of feedrolls with a dual pressure and Soft Opening - the working pressure starts as the log enters the feedrolls (HD)
- A feedroll pre-staging system is available with the active hydraulic system - guarantees the lowest possible load on the machine and minimal fibre loss (HD)

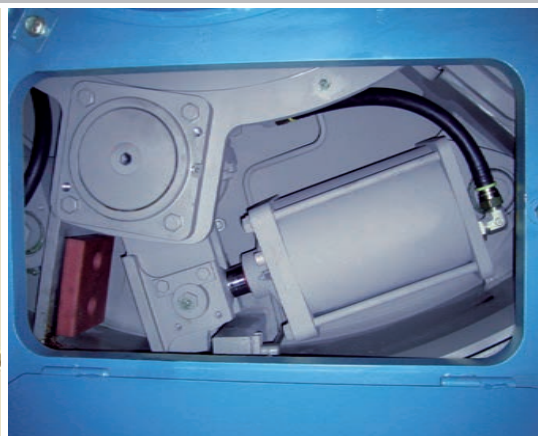

Debarking tool pressure

Debarking rotor can be alternatively equipped with:

A) Hydraulic tool pressure

- The pressure is created by stretching the rubber spring hydraulically - the pressure level is controlled by a separate pump unit
- Tool arms are made of forged steel - replaceable carbide tool tips

B) Pneumatic remote controlled tool pressure

- The pressure is created with compressed air
- The "Air Seal" system enables remote control of the tool pressure during operation
- Automatic opening of debarking tools, when the feeding stops
- Tool arms with a welded construction - replaceable carbide tool tips
- Extra strong components allows high-speed debarking with minimum down-time and operating costs

Valon Kone AB
Bollnäs, Sweden

VKS Pte Ltd
Singapore

VK North America Inc.
Spokane, WA, USA

OOO Valon Kone
Saint-Petersburg, Russia



Valon Kone Oy
P.O.Box 29, FI-08101 Lohja, Finland
Phone +358 19 36 061
Fax +358 19 382 729
info@valonkone.com
www.valonkone.com