

Feeding Magazine



Compact Series



Advanced Series

SA-OFM

Feeding speed (Variable) 0~40m/min / 0~131ft/min
Feeding speed (Inverter) 0~40m/min / 0~131ft/min (Optional)
Feeding power: 0.5HP (Optional 1HP, Inverter)

Resawing Conveyor




X Blade Series



SJ-QRC

Machine / Material

Workpiece length range 400~1500mm / 15.7~59.1"
Workpiece width range 50~150mm / 2.0~5.9"



Side pressure roller / Dia. x power 2pcs / ø100mm / ø3.9" x 120W
Suggested power 5HP

Workpiece length range 180~5000mm / 7.1~196.9"
Workpiece width range 50~700mm / 2.0~27.6"
Travel distance 650mm / 25.6"



Feeding roller / Dia. x width 6pcs / 60 x 350mm / 2.4 x 13.8"
Suggested power 5HP



www.XtraSharp.co

XtraSharp Machinery Co., Ltd.
No.145, Line 565, Pu Tsu St.,
Feng Yuan, Taichung 42072, Taiwan
E: william@xtrasharp.co

M: +886 956 00 75 03 (Taiwan)
M: +32 496 77 96 78 (Belgium)



AUTOMATED RIP SAW SYSTEMS

Return Conveyor



Compact Series




Advanced Series

SA-ORC


Return belt speed (Variable) 0~40m/min / 0~131ft/min
Return belt speed (Inverter) 0~40m/min / 0~131ft/min (Optional)
Return belt power: 0.5HP (Optional 1HP)

Workpiece length range 500~2500mm / 19.7~98.4"
Workpiece width range 60~250mm / 2.4~9.8"

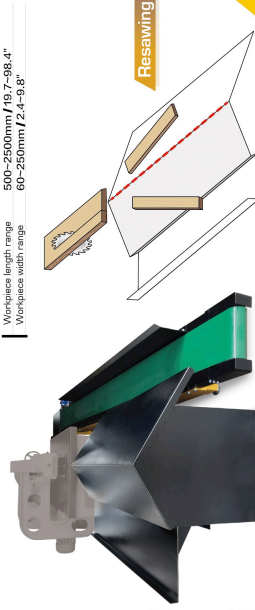

Resawing

Cut-to-size

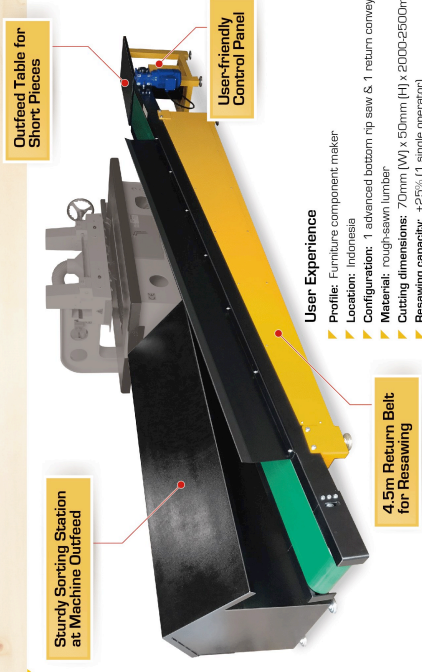

Sturdy Sorting Station at Machine Outfeed

Outfeed Table for Short Pieces

User-friendly Control Panel

User Experience

- Profile: Furniture component maker
- Location: Indonesia
- Configuration: 1 advanced bottom rip saw & 1 return conveyor
- Material: rough-sawn lumber
- Cutting dimensions: 70mm (W) x 50mm (H) x 2000-2500mm
- Resawing capacity: +25% (1 single operator)

4.5m Return Belt for Resawing