



Metric / Imperial

Machine Size [L x W x H]
2000 x 1420 x 1300mm / 79 x 56 x 51"

Packing Size [L x W x H]
1800 x 1530 x 1600mm / 71 x 60 x 63"

N.W. / G.W.
1500 / 1600kg / 3310 / 3530lbs

Max. Saw Blade Dia. x Bore
Ø305mm x 70mm / Ø12" x 2.8"

Dust Collection Hole x Power
Ø150mm / Ø6" x 5~10HP

Pressure Roller / Dia.
6pcs / Ø62mm / Ø2.4"

Max. Workpiece Thickness
75mm / 2.9" (Long plate)
95mm / 3.7" (Short plate)

Min. Workpiece Length
180mm / 7.1" (Long plate)
500mm / 19.7" (Short plate)

Max. Workpiece Width
690mm / 27.2"

Feed Chain Width [Cutting Range]
300mm / 11.8"

Spindle Power
40HP (Optional 50HP)


Feeding Power
2HP (Optional 2HP Inverter)

Spindle Speed
3200rpm

Feeding Speed
6.7~35m/min / 22~115ft/min

Table Surface
1600 x 700mm / 63 x 28"

Table Height
750mm / 29.5"

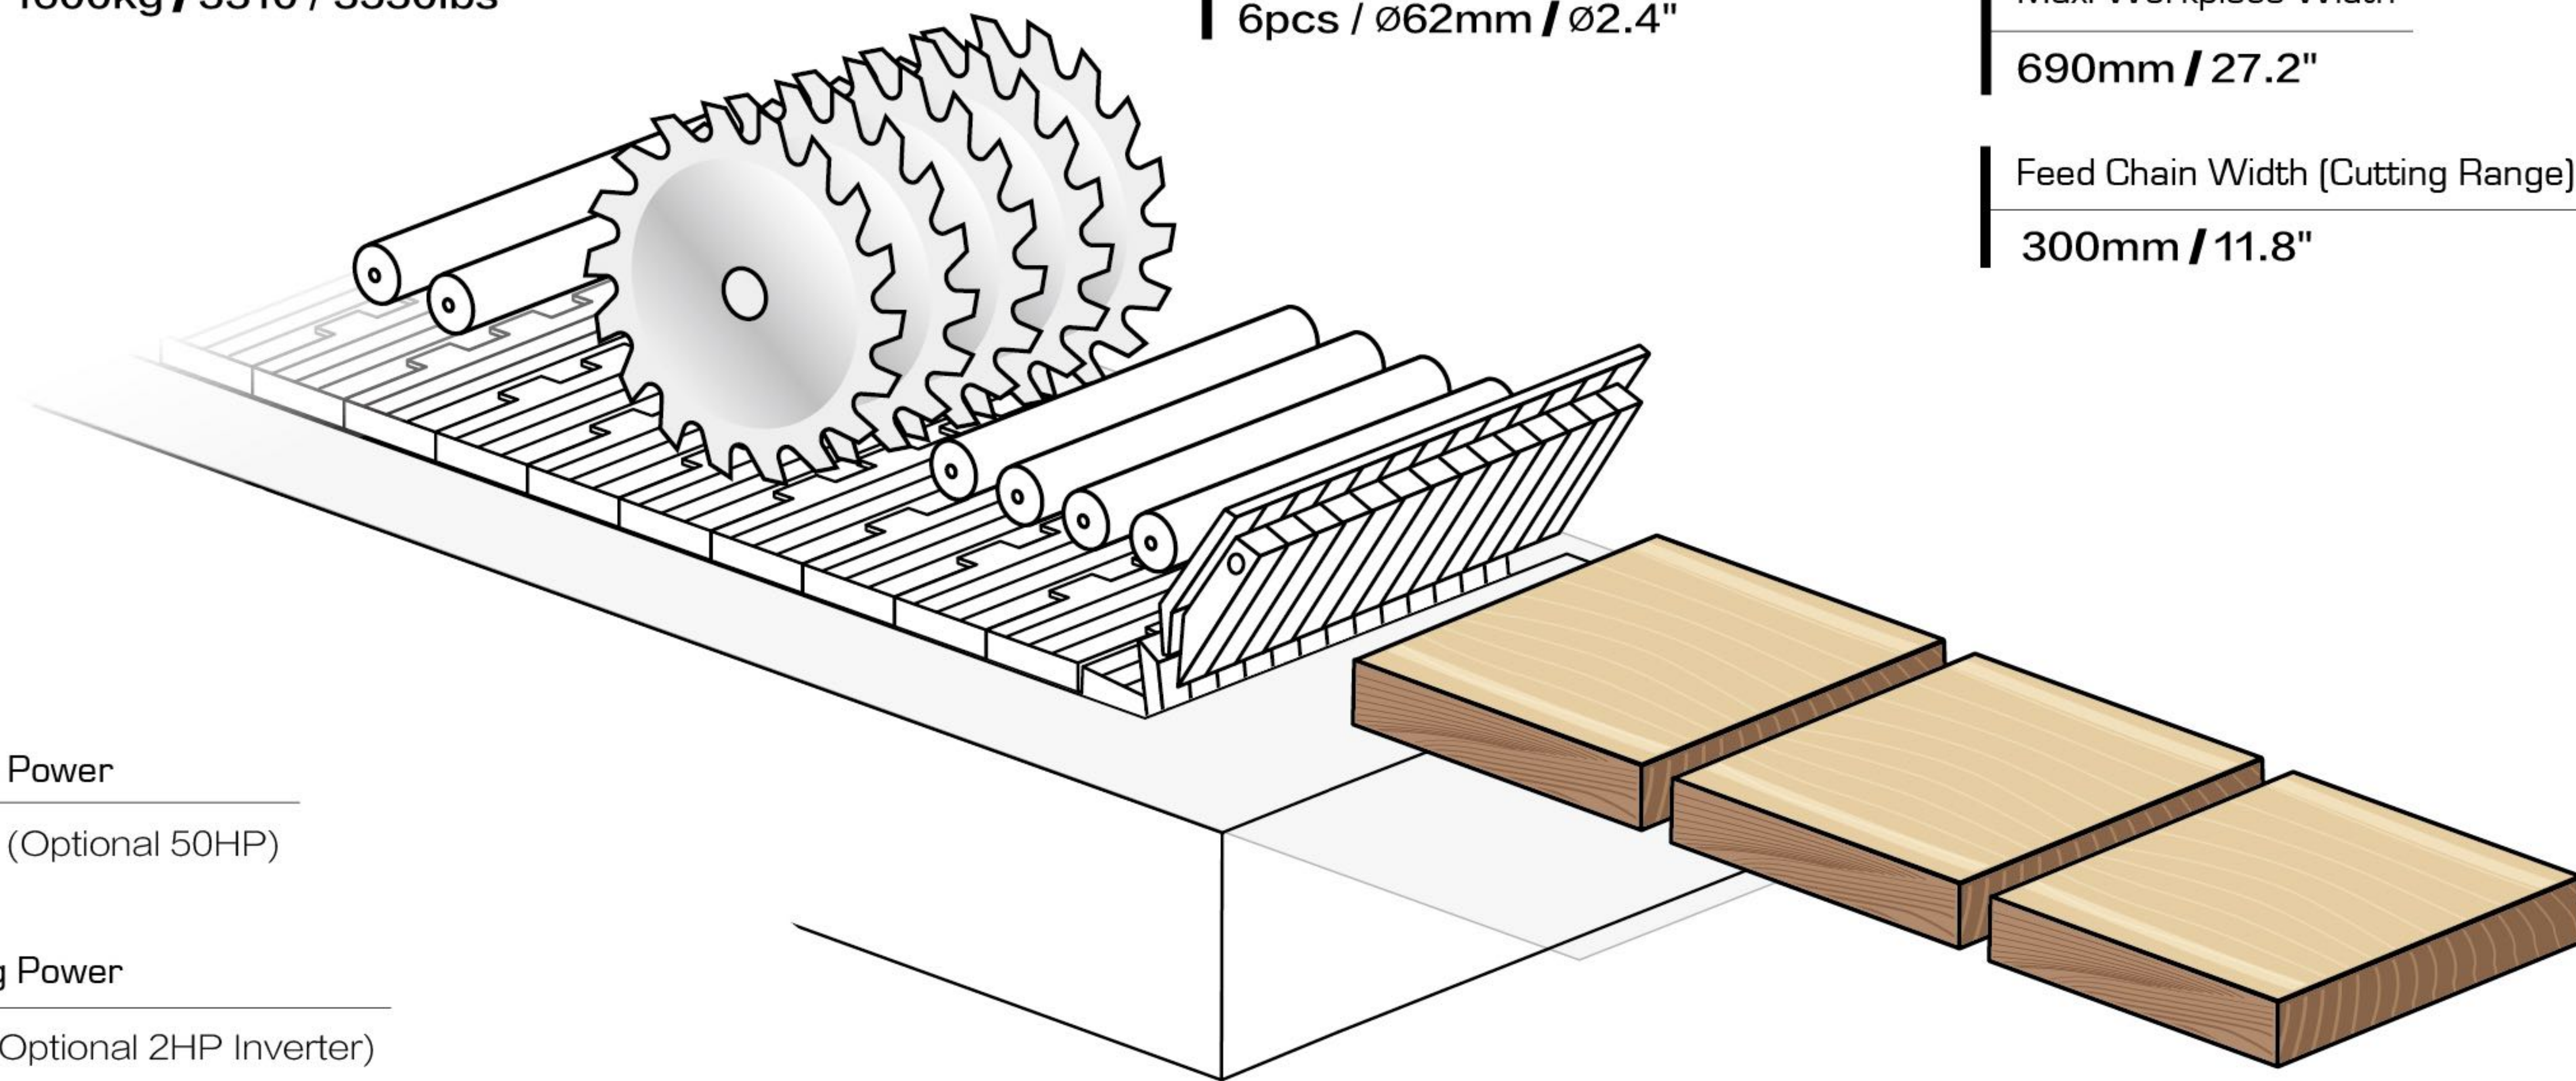

www.XtraSharp.co

XtraSharp Machinery Co., Ltd.
No.145, Lane 565, Pu Tsu St.,
Feng Yuan, Taichung 42072, Taiwan

T: +886-4-2522 5898
F: +886-4-2524 5820
E: william@XtraSharp.co

M: +886 956 00 75 03 (Taiwan)
M: +32 496 77 96 78 (Belgium)



XtraSharp

We Cut Straight!

SHORTCUT RIP SAW
SJ-95 SERIES

-XP: CE Certification
-XS: UL/CSA Certification




shortCut Rip Saw

User Experience

- Profile: Staircase manufacturer
- Location: Slovenia
- Configuration: - 1 shortCut rip saw
- 2 Compact bottom rip saws in series
- Material: Edged hardwood lumber
- Cutting dimensions: 50mm (W) x 50mm (H) x 180mm (L)
- Capacity: 6660 PCS/hour @ 20m/min (Excluding loading time)

Machining Procedure

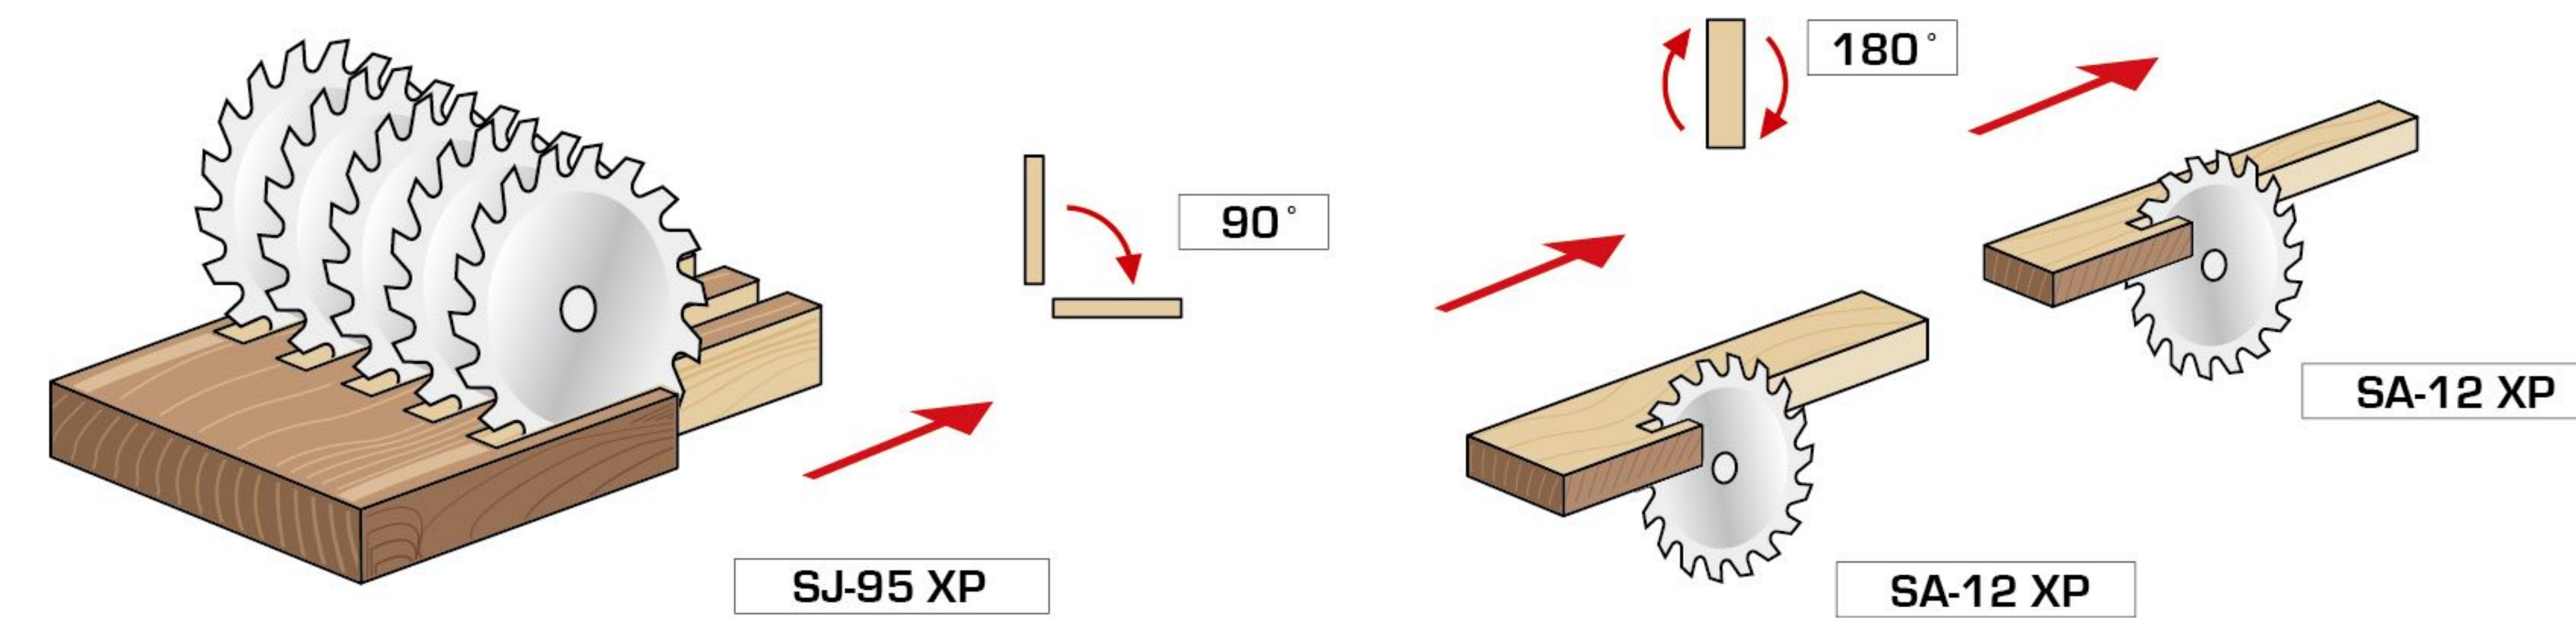

Multiple Ripping

Single Ripping

CE Locking System
for Access Door to
the Saw Blade

Short Stock
Guiding Fence

Anti-kickback
Fingers
(Top x2/Bottom x1)

CE Electrical
Cabinet, incl.
Safety Relay,
Emergency
Stop and
Power Lock

Precision Saw Arbor
for Clean and Smooth
Cutting

Robust Machine Body
Designed with Welded
Steel Frame

Centralized Auto
Lubrication