
Transmission Solutions

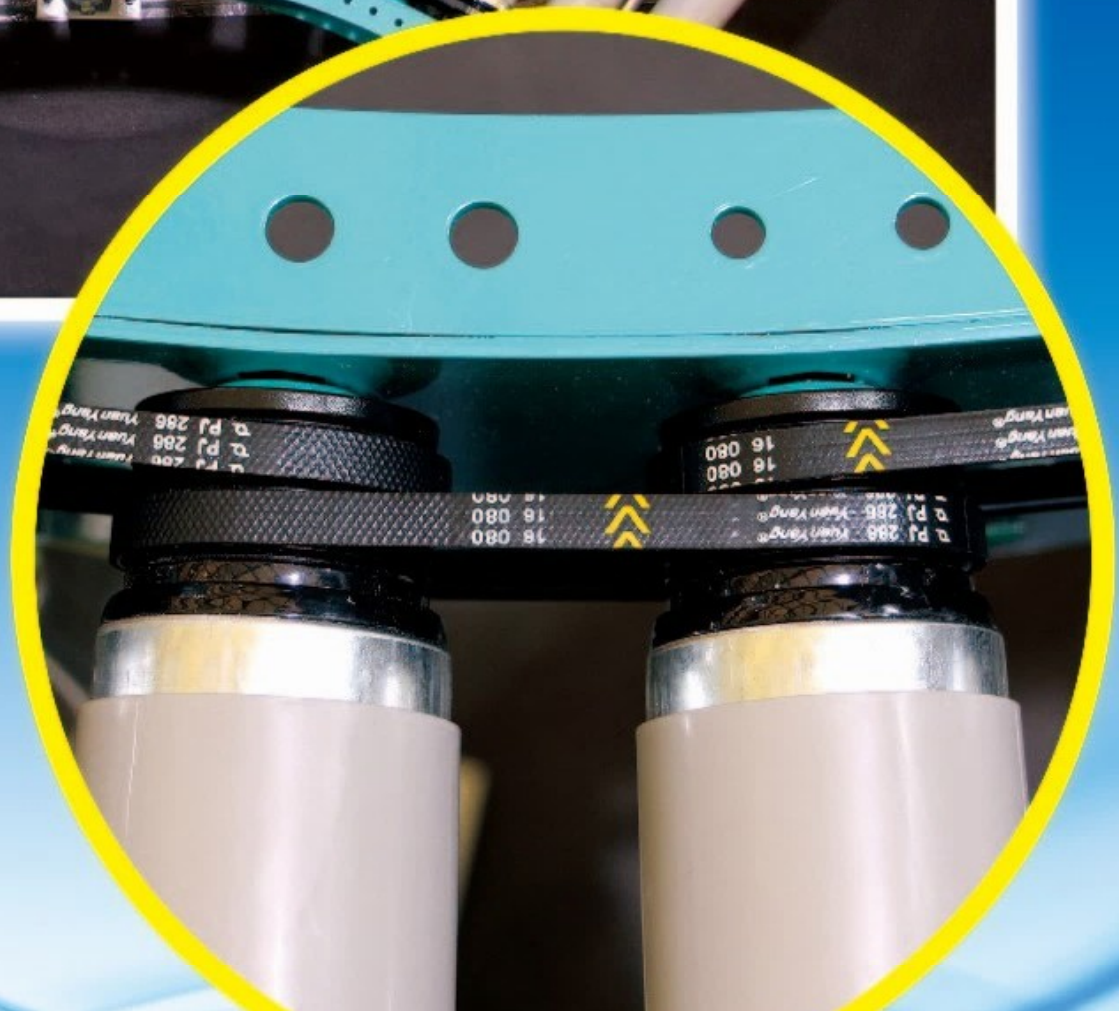


Yuanyang® Roller Conveyor Transmission Belt PJ

Special designed for roller diameter :50mm, Pulley Diameter: 43mm

Central Distance		Length/mm
2.165 〃	55	PJ246
2.362 〃	60	PJ256
2.637 〃	67	PJ270
2.874 〃	73	PJ282
3.000 〃	75	PJ286
3.071 〃	78	PJ288
3.149 〃	80	PJ290
3.267 〃	83	PJ302
3.543 〃	90	PJ314
3.700 〃	94	PJ316
4.000 〃	100	PJ336
4.133 〃	105	PJ346
4.330 〃	110	PJ348
4.724 〃	120	PJ376
5.236 〃	133	PJ416
5.905 〃	150	PJ435
6.300 〃	160	PJ456
6.889 〃	175	PJ486
7.874 〃	200	PJ536
8.543 〃	217	PJ570
− 0.04″/+0.12″	− 1/+3mm	Tolerance


PJ 246 YuanYang®
PJ 256 YuanYang®
PJ 256 YuanYang®
PJ 286 YuanYang®
PJ 290 YuanYang®
PJ 336 YuanYang®
PJ 336 YuanYang®
PJ 336 YuanYang®
PJ 346 YuanYang®
PJ 346 YuanYang®
PJ 376 YuanYang®
PJ 435 YuanYang®
YuanYang®

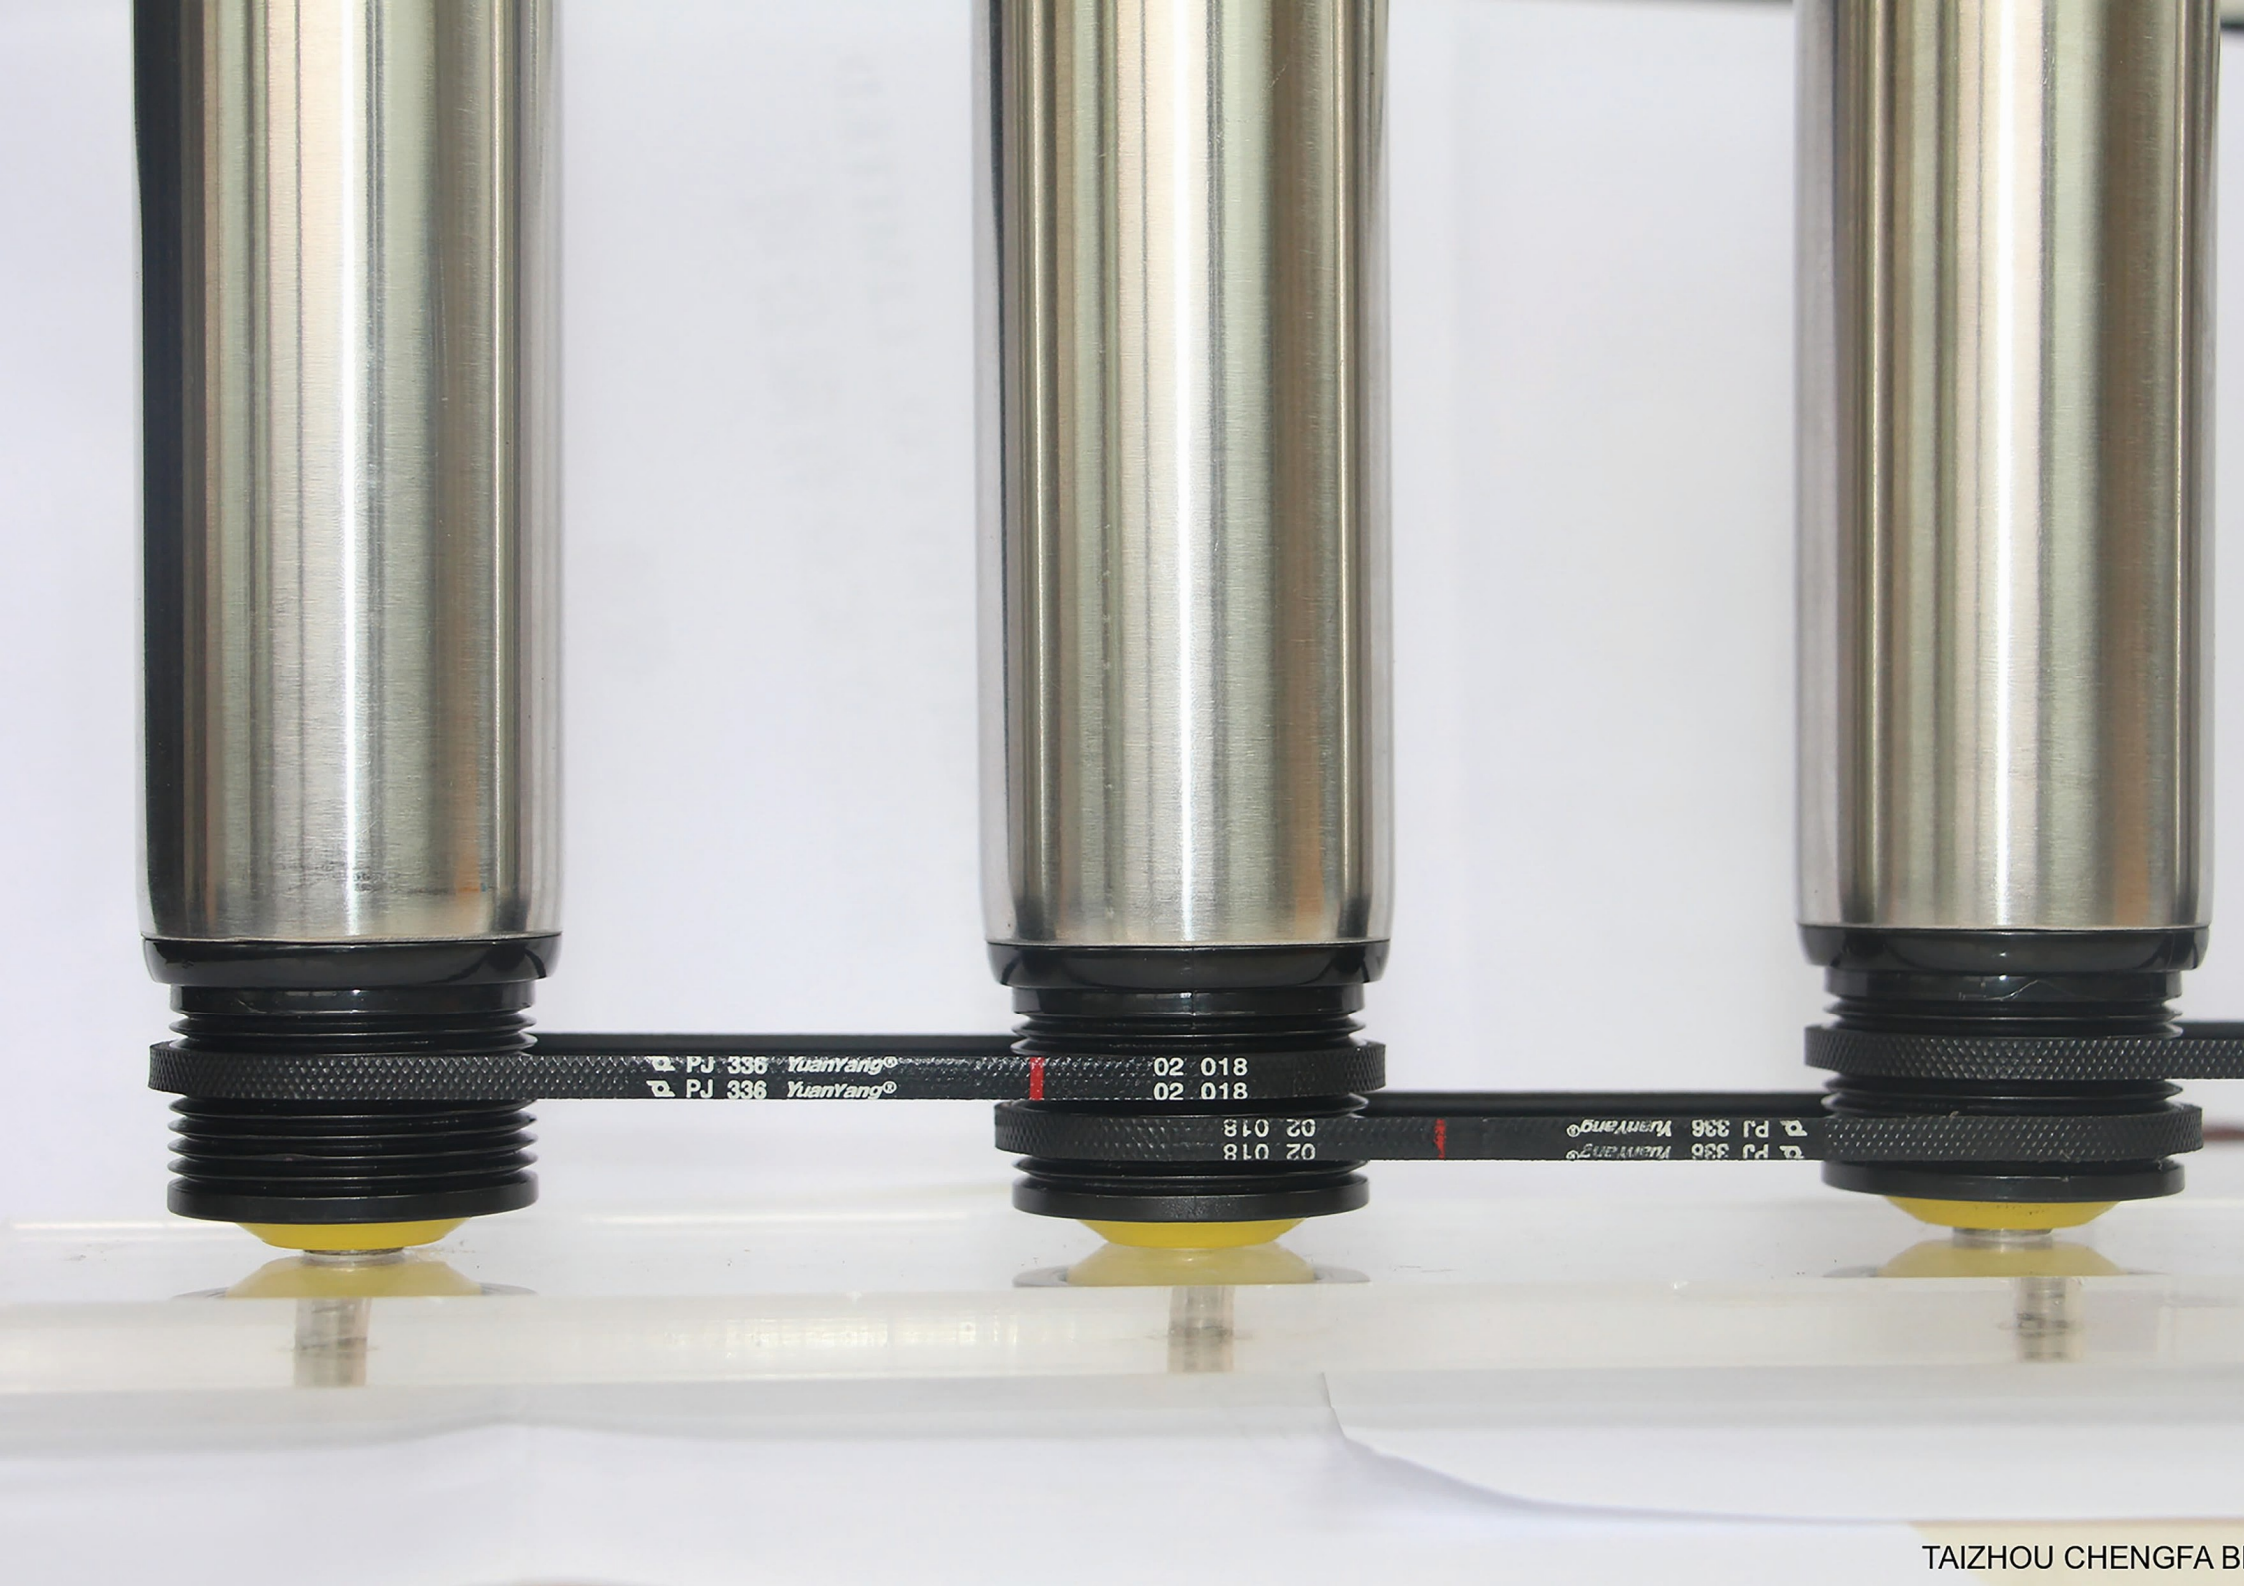

TAIZHOU CHENGFA BI

Maintenance-free
Silince
Clean



Roller Conveyor Belt

Structure:

Chengfa has developed an outstanding features of rubber compounds. The polyester elastic cord of yuanyang® belt has outsatading mechanical properties.It can withstand temperatures of -30 - 80 degrees.

Characteristics:

The elasticity of the yuanyang® belt allows it to absorb shocks, unlike chains or synchronous belts.

Power range:

Yuanyang® PJ belt is designed for light loads from 1-400 kgs for roller conveyors (standard 43mm pulley dismeter,50mm roller diameter).

Reliability
Cost saving
Easy to install
Customer satisfaction