

# HANDY SCAN**E**D

THE TRULY PORTABLE METROLOGY-GRADE 3D SCANNERS

SIL

101646



reddot award 2015 winner



CREAFORM



The HandySCAN 3D<sup>™</sup> handheld scanners of new generation have been optimized to meet the needs of product development and engineering professionals on the lookout for the most effective and reliable way to acquire 3D measurements of physical objects.

Creaform's flagship scanners underwent a complete re-engineering, building on its core assets. They are now more portable and they are faster at delivering accurate and high resolution 3D scans while remaining overly simple to use. Yet, it is their true portability that has changed the rules and set a whole new trend in the 3D scanning market.

WHEN ACCURACY MEETS PORTABILITY. INTRODUCING THE HANDYSCAN 3D SCANNERS.

### **CREAFORM 3D SCANNERS** ACCURACY. PORTABILITY. SIMPLICITY.





The easiest 3D scanning experience, generating fast and reliable measurements.



The truly portable metrology-grade 3D scanners delivering highly accurate measurements.

METRA SCAN3D



The most complete 3D scanning solution for metrology-grade measurements on all materials.

### THE HANDYSCAN 3D SCANNERS: YOUR BEST ALLY AT ALL STAGES OF YOUR PRODUCT LIFECYCLE MANAGEMENT

>



#### **Requirements and specifications**

Concept design


Concept prototyping



- Competitive product analysis
- Measurement of product environment or connecting/Surrounding parts

CAD design

Measurement of existing parts for aftermarket or custom equipment



Styling and aesthetics

Models and mock-ups

measurement/Reverse engineering

- Integration of prototype modifications into CAD file
- Form study, proof-of-concept prototypes
- Ergonomy prototypes

Desig

3D scan-to-CAD

- **Reverse engineering** (extracting design-intent)
- Packaging design



- Rapid prototyping/Manufacturing Integration of prototype modifications into CAD file
- Prototype inspection

>

>

> Testing, simulation and analysis



- Finite element analysis (FEA) Interference analysis
- Deformation, geometry analysis

Manufacturing




- Reverse engineering of dies, molds, fixtures, jigs and patterns
- Update of CAD file to reflect as-built tooling measurements

Documentation

**Tooling validation/Inspection** 

Assembly/Production

- Virtual assembly
- Tool/Robot path programming Part assessment before machining



- First article inspection (FAI)
- Part-to-CAD inspection
- Supplier quality inspection

Servicing



- As-built documentation of parts/Tooling
- Marketing presentations, 3D training systems, serious gaming
- **Digital archiving**

#### Maintenance, repair and overhaul (MRO)

- Wear and tear analysis **Custom repairs/Modification**
- As-built documentation of parts/Tooling before maintenance



- Reverse engineering for developing replacement/Restoration parts
- Planning of complex assemblies disassembly/Dismantling

## **OTHER APPLICATIONS**

Museology, heritage preservation, restoration, digital archiving, 3D scanning for research, analysis and publishing, multimedia, entertainment, computer graphics and special effects.

SCANNING 3D CREAFORM ALL OF THE CREAFORM PORTABLE 3D SCANNERS FEATURE **INNOVATIVE AND EXCLUSIVE TECHNOLOGIES:** 

**TRUaccuracy**<sup>™</sup>

ACCURATE MEASUREMENTS IN REAL LIFE OPERATING CONDITIONS

### **TRUportability**<sup>™</sup>

**3D SCANNING WHERE YOU NEED TO GO** 

#### **TRUsimplicity**<sup>™</sup>

**OVERLY SIMPLE 3D SCANNING PROCESS** 

**METROLOGY-GRADE MEASUREMENTS:** ACCURACY OF UP TO 0.030 mm, RESOLUTION OF UP TO 0.050 mm, HIGH REPEATABILITY AND TRACEABLE CERTIFICATE.

> **ON-THE-GO SCANNING:** TAKE IT FROM PLACE TO PLACE OR USE IT IN-HOUSE OR ON SITE.

VERSATILE: VIRTUALLY LIMITLESS 3D SCANNING -NO MATTER THE PART SIZE, COMPLEXITY, MATERIAL OR

COLOR.

LIGHTWEIGHT AND SMALL: WEIGHTS 0.85 kg, CAN REACH CONFINED AREAS. FITS INTO A CARRY-ON.

QUICK SET-UP: UP AND RUNNING IN LESS THAN 2 MINUTES.

POSITIONING SYSTEM, NO ARMS, NO TRIPOD OR FIXTURE.

FASTEST 3D SCANNER ON THE MARKET: 25 TIMES FASTER THAN THE PREVIOUS GENERATION.


HIGHEST MEASUREMENT RATE AMONG ALL LASER SCANNERS: 480,000 MEASUREMENTS/S.

**USER-FRIENDLY:** VERY SHORT LEARNING CURVE, REGARDLESS OF THE USER'S EXPERIENCE LEVEL.

NO RIGID SETUP **REQUIRED:** THE PART AND SCANNER CAN BE MOVED FREELY DURING SCANNING.

SELF-POSITIONING: IT USES TRIANGULATION ON OPTICAL REFLECTORS TO DETERMINE ITS RELATIVE POSITION TO THE PART.



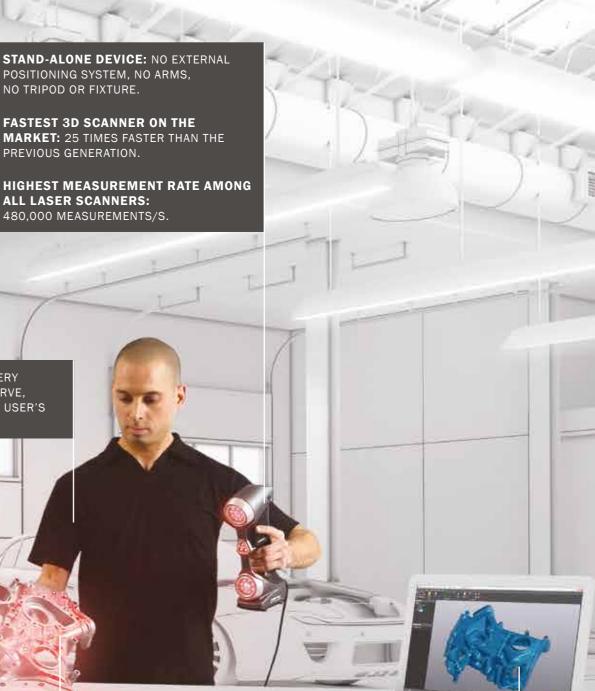

AUTOMATIC MESH OUTPUT: READY-TO-USE FILES, RIGHT AS YOU COMPLETE ACQUISITION.

QUICK WORKFLOW INTEGRATION: USABLE SCAN FILES TO BE IMPORTED INTO RE/CAD SOFTWARE WITHOUT POST-PROCESSING.

REAL-TIME VISUALIZATION: LOOK AT THE COMPUTER SCREEN TO SEE WHAT YOU ARE DOING AND WHAT IS LEFT TO BE DONE.

### VXELEMENTS<sup>™</sup>: CREAFORM'S 3D SOFTWARE PLATFORM

The HandySCAN 3D scanner comes with VXelements, a fully integrated 3D software platform that powers our entire fleet of 3D scanning and measurement technologies. It gathers all the essential elements and tools into a user-friendly, simplified and sleek working environment. Its real-time visualization provides a simple, enjoyable scanning experience.

An optimized scan file is automatically created and available upon completion of the data acquisition step, which contributes to greatly shorten your part inspection or design process.

- User-friendly interface: VXelements was designed to simplify the whole scanning process to its essential core, through a powerful and simple process;
- Surface optimization algorithm: avoids the creation of multiple scan layers and ensures a more accurate mesh without any post-treatment;
- Direct mesh output: an optimized mesh can be exported in all standard formats, right as you complete acquisition. No complicated alignment or point cloud processing needed;
- No limitation to the scan resolution: you simply need to input a resolution value, independent from the size of the scanned object. Resolution can be changed at any time before/after the scan;
- Real-time visualization: the user can view the 3D surface as the object is being scanned;
- Scan results enhancement: hole filling, smart decimation, boundary filters, etc.

### EXTEND THE POWER OF YOUR HANDYSCAN 3D SCANNER

#### MaxSHOT 3D<sup>™</sup>: Optical coordinate measuring system

To increase data accuracy through photogrammetry, you can use the MaxSHOT 3D optical coordinate measuring system with your HandySCAN 3D scanner for large-scale projects and parts. Based on a series of 2D photos, the MaxSHOT 3D makes it possible to quickly and easily generate a highly accurate positioning model of your part, which contributes to significantly increase 3D scan files accuracy.



VXmodel is a post-treatment software that directly integrates into VXelements and seamlessly allows to finalize 3D scan data for use directly in any CAD or 3D printing software. VXmodel provides the simplest and fastest path from 3D scans to your CAD or additive manufacturing workflow.



#### VXinspect<sup>™</sup>: Quality control software that takes it to the next level

VXinspect<sup>™</sup> is an intuitive and powerful 3D inspection software designed for manufacturing companies conducting first article inspection (FAI) or quality control. Directly integrated into VXelements<sup>™</sup>, Creaform's 3D software platform and application suite, VXinspect provides the simplest integration of probing, 3D scanning and photogrammetry measurements.



#### VXremote<sup>™</sup>: Remote access software application

VXremote improves your efficiency in the field by providing fast and easy remote access to VXelements. It offers quick activation and set-up and requires no hardware or server to install or maintain. You can have all its data acquisition functionalities at your fingertips... Available only with the Creaform Certified Rugged Tablet!



### ACCESSORIES

#### INCLUDED

- Carrying case
- Calibration plate
- Custom USB cable
- Power supply
- 2,000 positioning targets
- 1-year warranty on parts and labor

#### OPTIONAL

- Certified laptop computer
- 3D scanner external battery
- Rugged tablet with VXremote
- Magnetic, reusable positioning targets



### CREAFORM CUSTOMER CARE

Creaform is committed to offering first-class customer service so that you can get the most out of your system.

Our multilingual team of product specialists will provide you with assistance to answer your immediate needs. Our fleet of leading-edge calibration tools in our service centers gives you local access to faster maintenance service and repair.

Be sure to subscribe to the Customer Care Program to take advantage of worry-free maintenance and global repair coverage for all of your Creaform hardware and software. Whether you need to access our latest software releases and knowledge base or require a loaner unit while your device is being serviced, we have a plan tailored to your needs. Gain peace of mind knowing your equipment will get even better with time.

### CREAFORM METROLOGY AND 3D ENGINEERING SERVICES

Convinced of the quality and possibilities of the Creaform technologies, but not quite yet ready to commit and buy? Know that Creaform offers a wide range of metrology and 3D engineering services. Our experts have earned a worldwide reputation for effectiveness and professionalism. Whether you need their help to perform 3D scanning, quality control, reverse engineering, FEA/CFD simulations, product and tool development or training services, you can count on their commitment to meet your requirements with responsiveness and adaptability.

### **TECHNICAL SPECIFICATIONS**





|   |                     | HandySCAN 300™   | HandySCAN 700™                  |
|---|---------------------|--|---------------------------------|
| WEIGHT                                    |                     | 0.85 kg  |                                 |
| DIMENSIONS (LxWxH)                        |                     | 77 x 122 x 294 mm  |                                 |
| MEASUREMENT RATE                          |                     | 205,000 measurements/s   | 480,000 measurements/s          |
| SCANNING AREA                             |                     | 225 x 250 mm   | 275 x 250 mm                    |
| LIGHT SOURCE                              |                     | 3 laser crosses  | 7 laser crosses (+1 extra line) |
| LASER CLASS                               |                     | 2M (eye-safe)  |                                 |
| RESOLUTION                                |                     | 0.100 mm   | 0.050 mm                        |
| ACCURACY                                  |                     | Up to 0.040 mm   | Up to 0.030 mm                  |
|   | VOLUMETRIC ACCURACY | 0.020 mm + 0.100 mm/m  | 0.020 mm + 0.060 mm/m           |
| VOLUMETRIC ACCURACY WITH                  | MaxSHOT Next™       | 0.020 mm + 0.025 mm/m  |                                 |
|   | MaxSHOT Next™ Elite | 0.020 mm + 0.015 mm/m  |                                 |
| STAND-OFF DISTANCE                        |                     | 300 mm   |                                 |
| DEPTH OF FIELD                            |                     | 250 mm   |                                 |
| PART SIZE RANGE (RECOMMENDED)             |                     | 0.1-4 m  |                                 |
| SOFTWARE                                  |                     | VXelements   |                                 |
| OUTPUT FORMATS                            |                     | .dae, .fbx, .ma, .obj, .ply, .stl, .txt, .wrl, .x3d, .x3dz, .zpr   |                                 |
| COMPATIBLE SOFTWARE*                      |                     | 3D Systems (Geomagic® Solutions), InnovMetric Software (PolyWorks),<br>Metrologic Group (Metrolog X4), New River Kinematics (Spatial Analyzer),<br>Verisurf, Dassault Systèmes (CATIA V5 and SolidWorks), PTC (Pro/ENGINEER),<br>Siemens (NX and Solid Edge), Autodesk (Inventor, PowerINSPECT). |                                 |
| CONNECTION STANDARD                       |                     | 1 X USB 3.0  |                                 |
| OPERATING TEMPERATURE RANGE               |                     | 5 °C - 40 °C   |                                 |
| OPERATING HUMIDITY RANGE (NON-CONDENSING) |                     | 10 - 90%   |                                 |
| CERTIFICATIONS                            |                     | EC Compliance (Electromagnetic Compatibility Directive, Low Voltage<br>Directive), IP50, WEEE  |                                 |

\* Also compatible with all major metrology, CAD, and computer graphic software through mesh and point cloud import.



## AMETEK GmbH Division Creaform Deutschland

Meisenweg 37 D - 70771 Leinfelden-Echterdingen T. +49 711 1856 8030 | F. +49 711 1856 8099

creaform.info.germany@ametek.com | creaform3d.com



Authorized Distributor

SCAN 3D, TRUaccuracy, TRUportability, TRUsimplicity, odel,VXremote and their respective logo are SCAN 3D, Me AN 3D, F Next™|Elite, VXm xSHOT 3D. Ma xt. Ma 18 AII d. V1