

SALIDA Moulding Sanding Machine

The main frame is fabricated of heavy steel plate and ribbed to minimize vibration and deflection.

- All operating controls are centralized in a convenient control panel.
- It can be used to sand architrave and molding for 3 sides or 4 sides.
- Brush head with sanding strip and wooden brush, it has been designed for easy replacement.
- The location of all the sand head tilt can be adjusted to, more flexible material consistent with the shape of the work., angle-type work material specifically for sand bald notched or corner can be adjusted independently of the direction of the upper and lower teeth of sand round and head angle


Specifications

Model no.:	SL-300-5SH/3sides	SL-300-6SH/4 sides	SL-300-7SH /4sides
Max. Working Width	12" (300mm)	12" (300mm)	12" (300mm)
Max. Working Height	4" (100mm)	4" (100mm)	4" (100mm)
Min. Work-pieces Length	33" (840mm)	33" (840mm)	33" (840mm)
Min. Work-pieces Thickness	3/8" (9.5mm)	3/8" (9.5mm)	3/8" (9.5mm)
Conveyor feed speed by VFD (INVERTER)	2 ~ 12 M/min 6 ~ 36 FPM	2 ~ 12 M/min 6 ~ 36 FPM	2 ~ 12 M/min 6 ~ 36 FPM
Speed of Sanding Head	200 ~ 1200 R.P.M.	200 ~ 1200 R.P.M.	200 ~ 1200 R.P.M.
Top brush Head Motor	2 × 3/4HP (0.55 KW)	2 × 3/4HP (0.55 KW)	2 × 3/4HP (0.55 KW)
Bottom brush Head Motor		1 × 3/4HP (0.55 KW)	2 × 3/4HP (0.55 KW)
Right brush Head Motor	1 × 1/2HP (0.37 KW)	1 × 1/2HP (0.37 KW)	1 × 1/2HP (0.37 KW)
Left brush Head Motor	1 × 1/2HP (0.37 KW)	1 × 1/2HP (0.37 KW)	1 × 1/2HP (0.37 KW)
Angle brush Head Motor	1 × 1/2HP (0.37 KW)	1 × 1/2HP (0.37 KW)	1 × 1/2HP (0.37 KW)
Conveyor Motor	1/4HP (0.18KW)	1/4HP (0.18KW)	1/4HP (0.18KW)
Machine Dimension (D × W × H)	184cm×123cm×155cm	224cm × 123cm ×155cm	224cm × 123cm× 155cm
Packing Dimension (D × W × H)	205cm×101cm×163cm	230cm × 101cm ×164cm	230cm × 101cm ×164cm
Net Weight	340 KGS	390 KGS	480 KGS
Gross Weight	470 KGS	520 KGS	620 KGS

Moulding Sanding Machine 3 sides / SL-300-5SH


Right side Sanding Head
1/2 HP , Length:152mm

Top side Sanding Head 3/4 HP × 2
Length:300mm

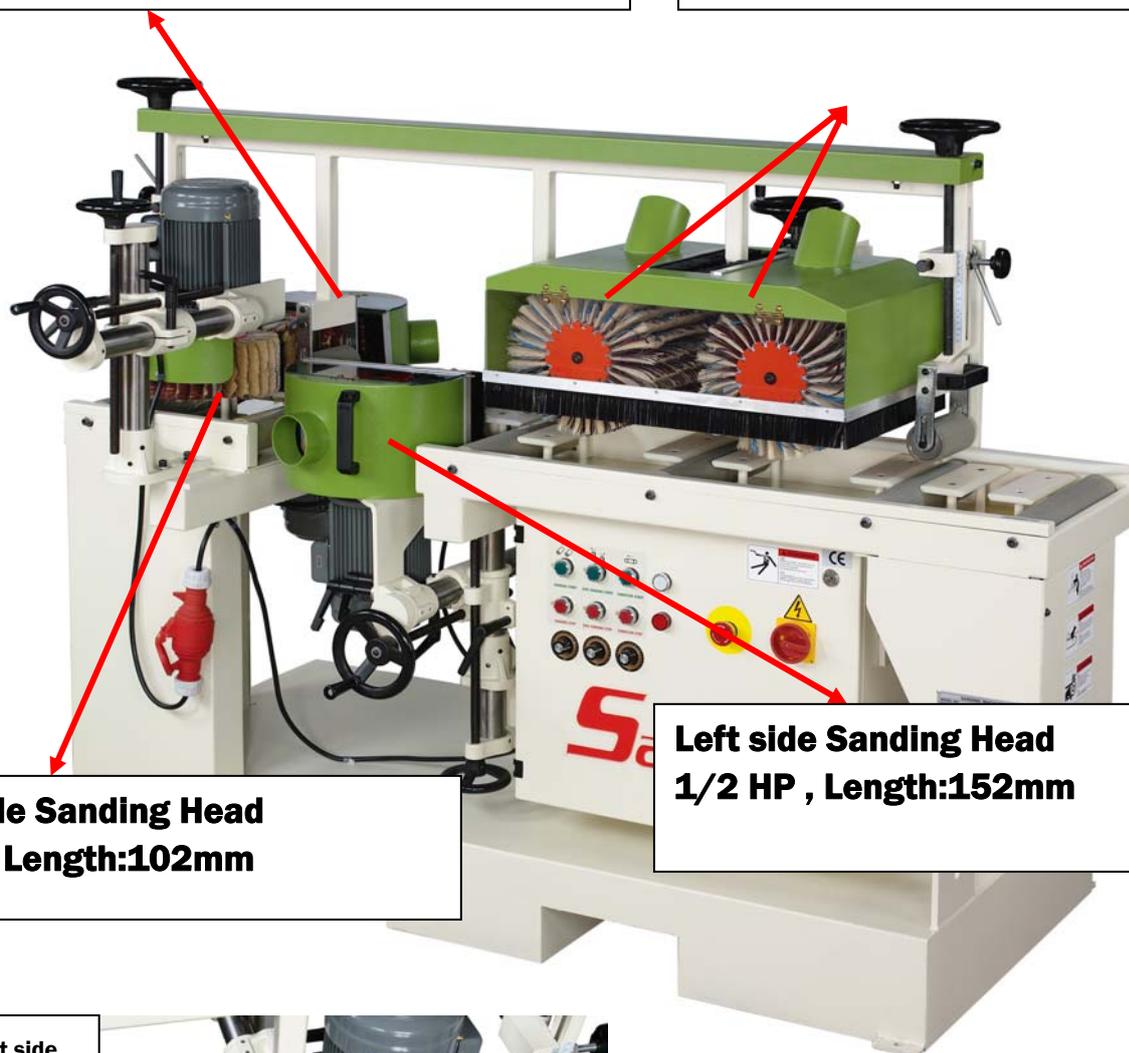

Angle side Sanding Head
1/2 HP , Length:102mm

Left side Sanding Head
1/2 HP , Length:152mm

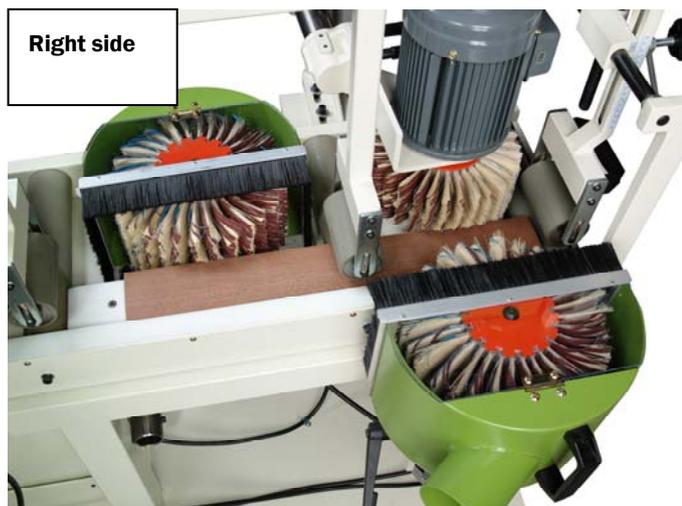


It's very easy and convenient to
replace the brush wear strip on the hubs.

SALIDA Moulding Sanding Machine 4 sides / SL-300-7SH

Right side Sanding Head
1/2 HP , Length:152mm



Top side Sanding Head 3/4 HP × 2
2 Length:300mm

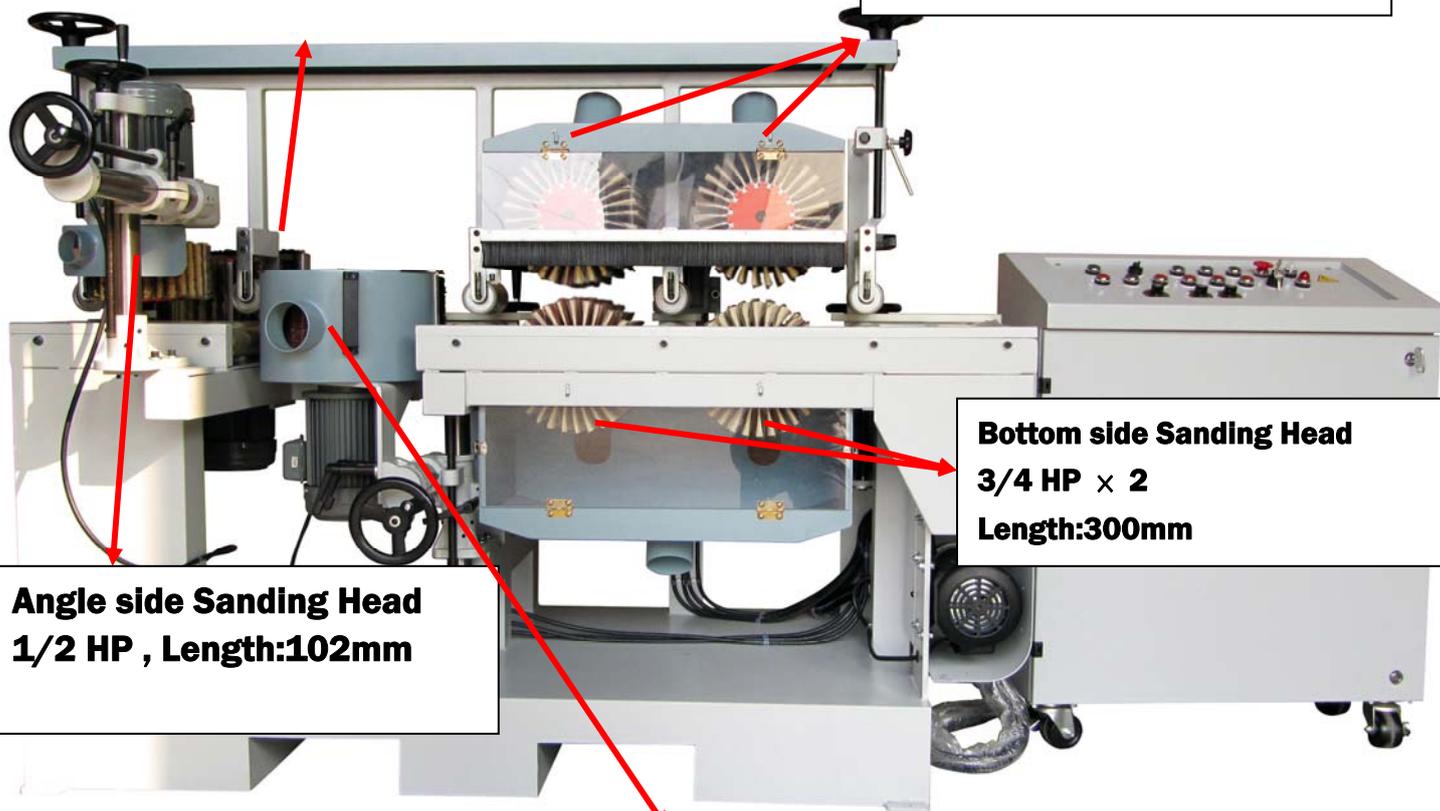

Bottom side Sanding Head
3/4 HP × 2
Length:300mm

Angle side Sanding Head
1/2 HP , Length:102mm

Left side Sanding Head
1/2 HP , Length:152mm

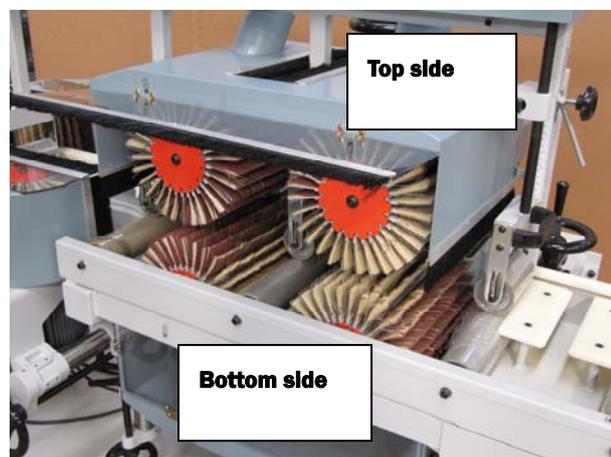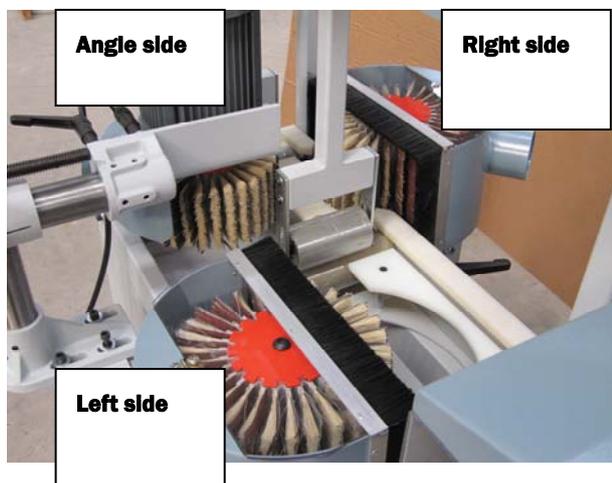

OPTIONAL:

1.SHORT PART KIT DEVICE SUPPPORT SHORTER WOOD-PIECE AT MINIMUM 10” (254mm) length.

2.Oscillation function solves the problem for very thin sanding grains of surface of wood-piece ,can solve the sanding grain on the wood-pieces surface .

MODEL: SL-300-7SH-OL / 4 sides

with oscillation function and short roller system

