


锥孔 SYPT 联轴器  
Taper Bore SYPT Coupling

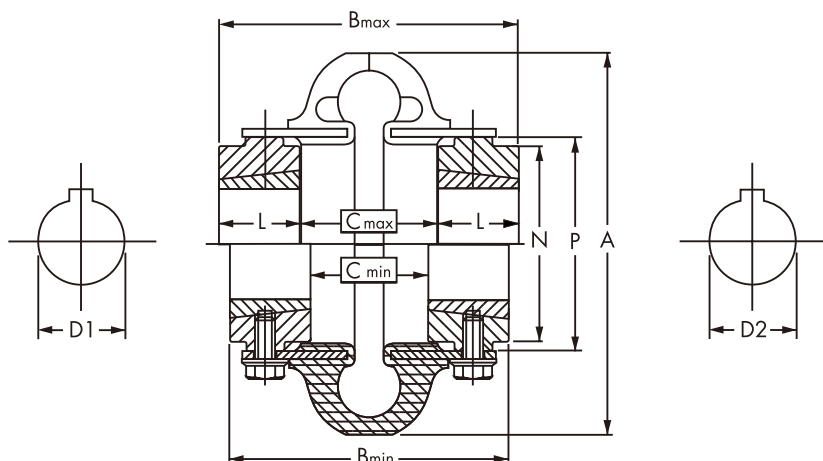

型号 Size	额定 扭矩 Nomal Torque (NM)	最大 转速 Max Speed (RPM)	A	孔径/Bore		孔径/Bore		N	P	锥套 型号 Bush NO.	孔径/Bore		L	螺丝尺寸 Screw Size
				最小 Min B	最大 Max B	最小 Min C	最大 Max C				最小 Min D1 D2	最大 Max D1 D2		
3	41	7500	102	87	87	43	43	50	59	1008	10	25	22	1/4"×1/2"
4	62	7500	116	87	87	43	43	57	66	1008	10	25	22	1/4"×1/2"
5	105	7500	137	102	102	52	52	70	80	1210	11	32	25	3/8"×5/8"
10	164	7500	162	102	102	52	52	84	93	1610	14	42	25	3/8"×5/8"
20	260	6600	184	114	114	64	64	102	114	1610	14	42	25	3/8"×5/8"
30	412	5800	210	129	129	56	56	118	138	2012	14	50	32	7/16"×7/8"
40	622	5000	241	150	150	60	60	146	168	2517	16	65	45	1/2"×1"
50	864	4200	279	166	166	76	76	152	207	2517	16	65	45	1/2"×1"
60	1412	3800	318	186	186	84	84	165	222	3020	25	75	51	5/8"×1 1/4"
70	2490	3600	356	238	238	60	60	175	235	3535	35	100	89	1/2"×1 1/2"
80	4460	2000	406	299	299	95	95	204	286	4040	40	110	102	5/8"×1 3/4"