



Metric / Imperial

Dust Collection Hole x Suggested Power

Ø125mm / Ø5" x 5HP

Pressure Roller / Dia.

8pcs / Ø70mm / Ø2.8"



Dual Chain Conveyor

Cast Iron Guide Rails
9 V-shaped Ways

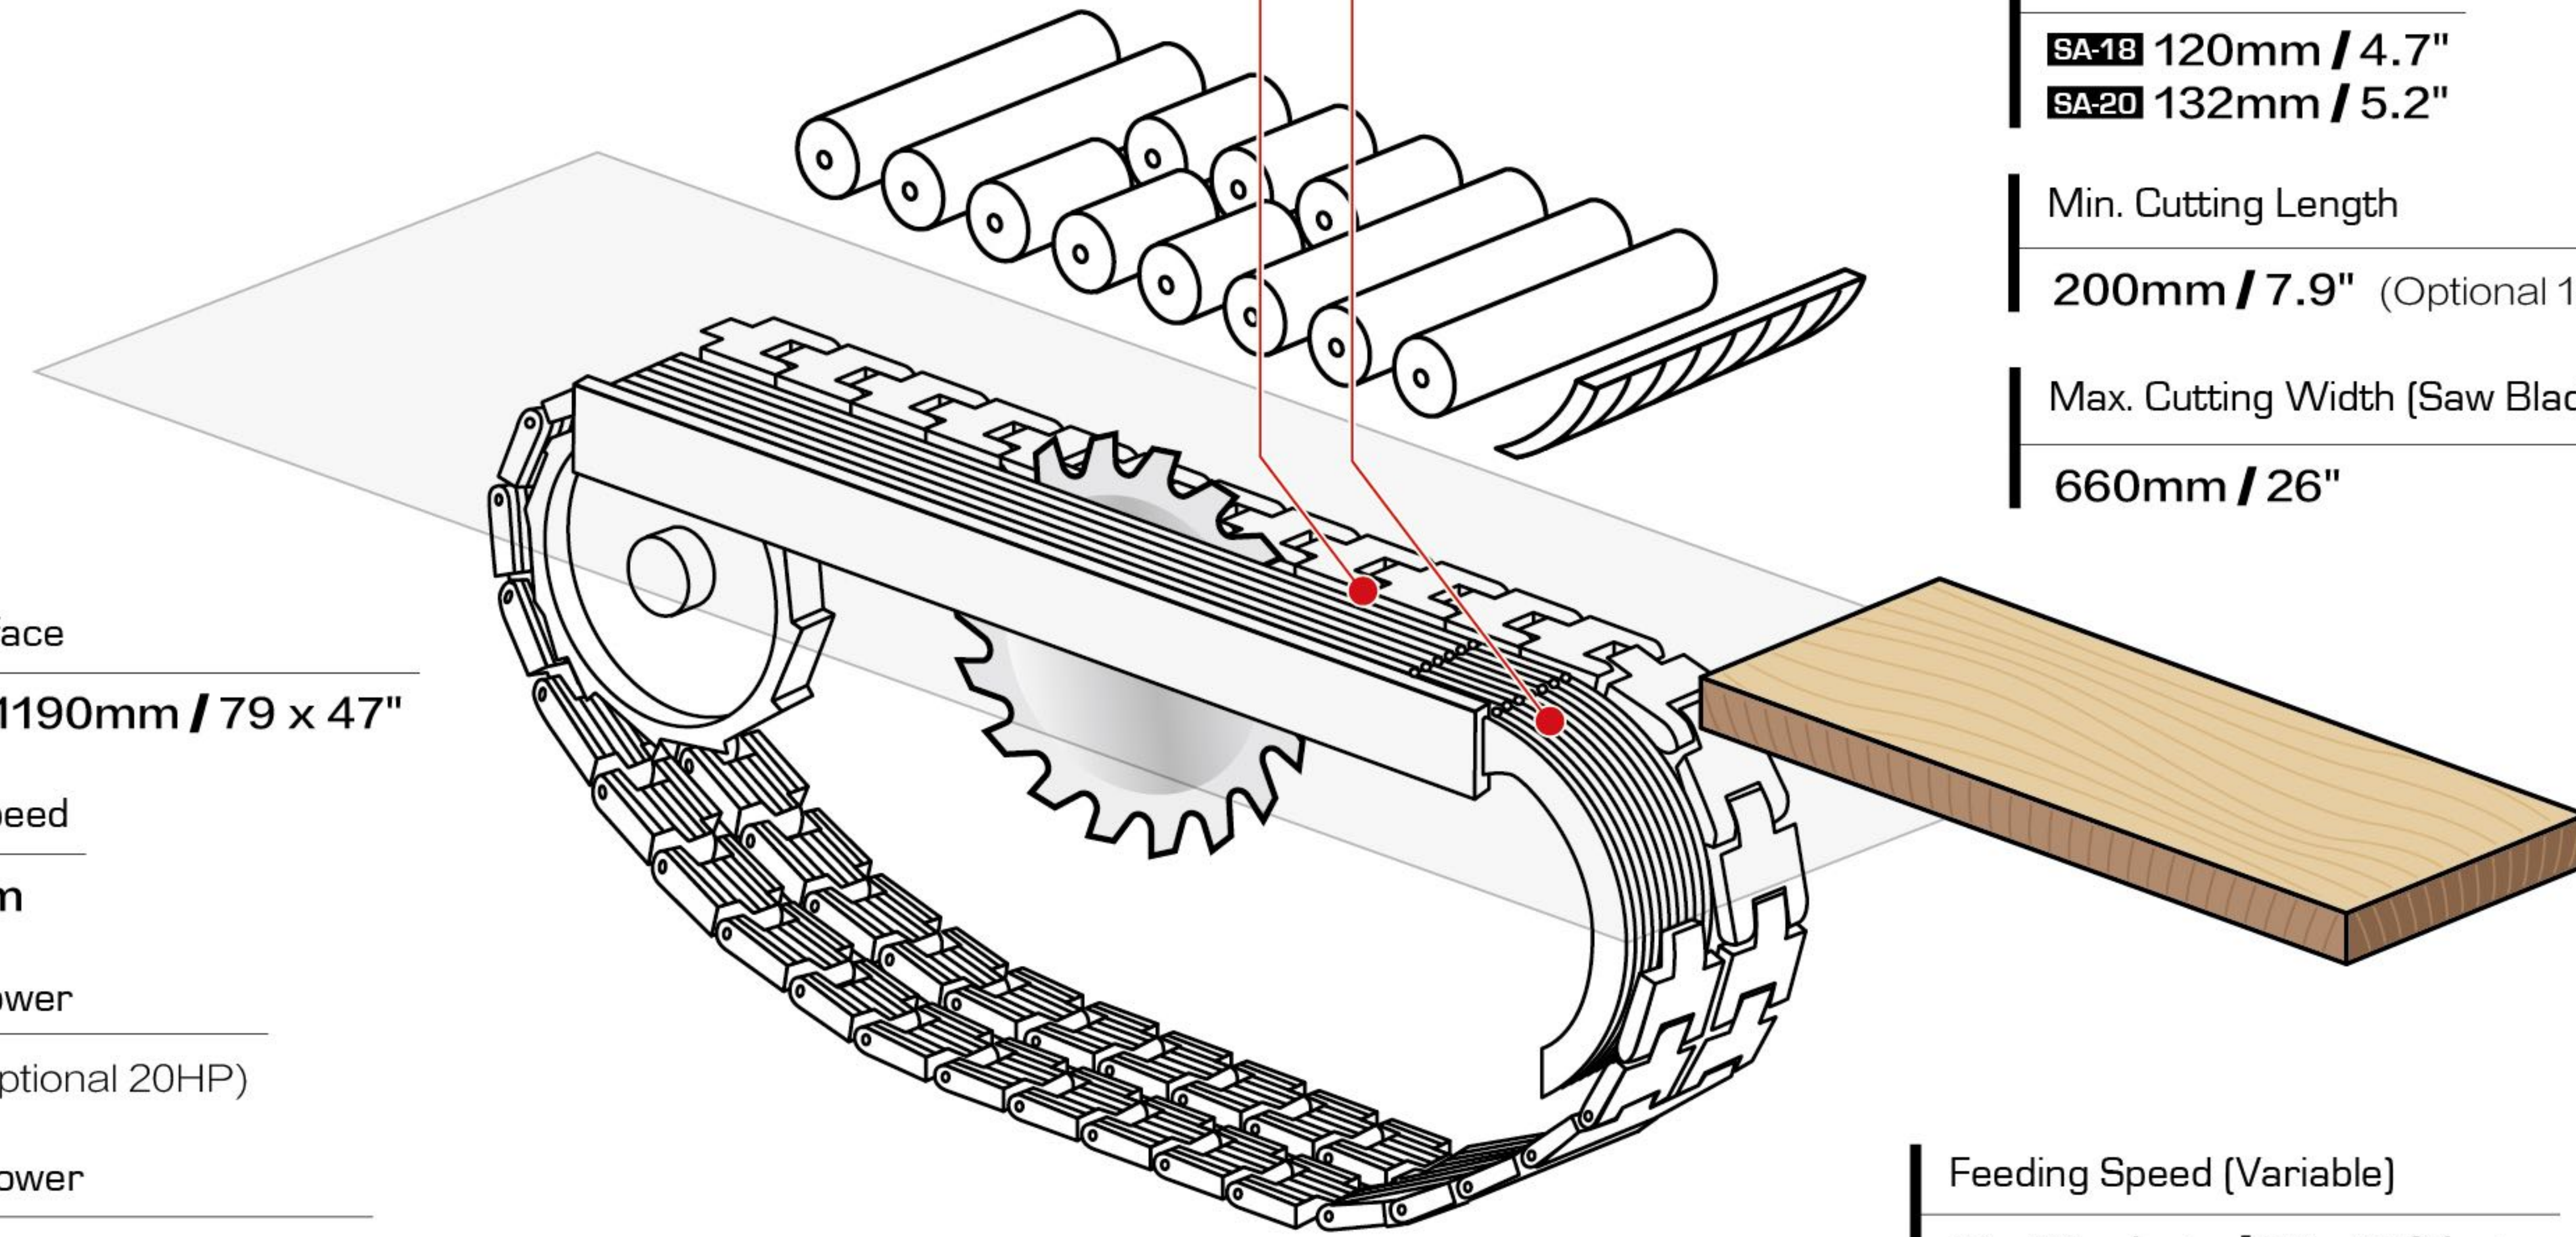


Table Surface

2000 x 1190mm / 79 x 47"

Spindle Speed

3000rpm

Spindle Power

15HP (Optional 20HP)

Feeding Power

2HP (Optional 2HP Inverter)

Saw Blade Dia. x Bore

Ø355~510mm x 50.8mm / Ø14~20" x 2"

Machine Size [L x W x H]

SA-18 2220 x 1550 x 1510mm / 87 x 61 x 59"

SA-20 2220 x 1550 x 1530mm / 87 x 61 x 60"

Packing Size [L x W x H]

2270 x 1680 x 1750mm / 89 x 66 x 69"

N.W. / G.W.

1635 / 1700kg / 3600 / 3750lbs

Max. Cutting Thickness

SA-18 120mm / 4.7"

SA-20 132mm / 5.2"

Min. Cutting Length

200mm / 7.9" (Optional 150mm / 5.9")

Max. Cutting Width (Saw Blade's Right Side)

660mm / 26"

Feeding Speed (Variable)

11~26m/min / 36~85ft/min

Feeding Speed (Inverter)

11~26m/min / 36~85ft/min (Optional)

XtraSharp

We Cut Straight!

ADVANCED BOTTOM RIP SAW SA-18/20 SERIES

-XP: CE Certification

-XS: UL/CSA Certification

www.XtraSharp.co

XtraSharp Machinery Co., Ltd.
No.145, Lane 565, Pu Tsu St.,
Feng Yuan, Taichung 42072, Taiwan

T: +886-4-2522 5898
F: +886-4-2524 5820
E: william@XtraSharp.co

M: +886 956 00 75 03 (Taiwan)
M: +32 496 77 96 78 (Belgium)




XtraSharp
We Cut Straight!

Advanced Bottom Rip Saw

User Experience

- Profile: Solid wood panel producer
- Location: England
- Configuration: 2 advanced bottom rip saws in series
- Material: Pre-planed lumber on top and bottom surfaces
- Cutting dimensions: 100mm (W) x 60mm (H) x 600mm (L)
- Capacity: 2000 PCS/hour @ 20m/min (Excluding loading time)

Machining Procedure

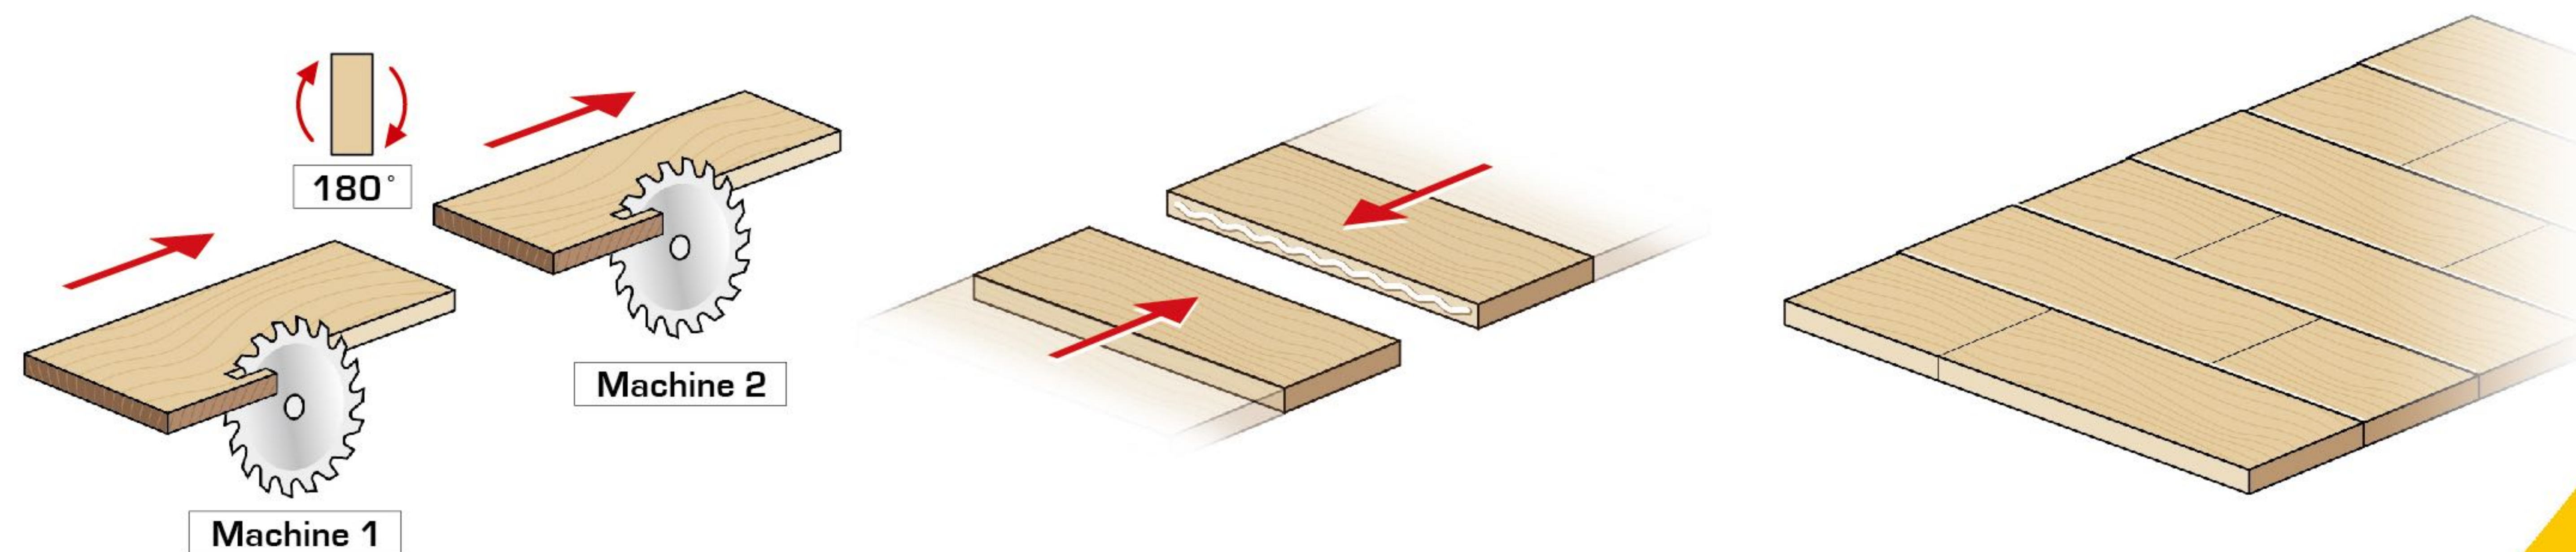

Sawing

Gluing

Assembly

CE Side Guard

Anti-kickback Fingers
(Bottom/Top) for Safer
Feeding Operations

Ruggedly Built
FC 28-30 Cast Column
with Worm Gear System
for Elevation

Feeding Speed
Controlled by Inverter

CE Locking System
for Access Door to
the Saw Blade

Robust Machine Body
Designed with Welded
Steel Frame

Dual-purpose
Light Fence for
Ripping & Splitting

Centralized Auto
Lubrication

CE Electrical
Cabinet, incl.
Safety Relay,
Emergency
Stop and
Power Lock